



HEWLETT-PACKARD 9830A CALCULATOR

OPERATING and PROGRAMMING

OPERATING and PROGRAMMING MANUAL

HEWLETT-PACKARD 9830A CALCULATOR



9830A CALCULATOR SHOWN WITH 9866A PRINTER

HEWLETT-PACKARD CALCULATOR PRODUCTS DIVISION

P.O. Box 301, Loveland, Colorado 80537, Tel. (303) 667-5000

(For World-wide Sales and Service Offices see rear of manual.)

Copyright by Hewlett-Packard Company 1973

MANUAL SUMMARY



CHAPTER 1: GENERAL OPERATING INFORMATION

To familiarize the user with the Model 30, various topics are introduced.

CHAPTER 2: USING THE MODEL 30 KEYBOARD

The capabilities of the Model 30, strictly as a calculator, are described. Editing capabilities are presented. Mathematical topics include variables, trigonometric operations, and logical evaluation.

CHAPTER 3: PROGRAMMING AND PROGRAMMING STATEMENTS

The programming language, BASIC, is presented. Programming statements are individually discussed. Examples, using particular statements, are given.

CHAPTER 4: PROGRAMMING-RELATED INFORMATION

Program viewing, editing, and debugging are discussed individually. Useful keys and commands, related to these topics, are presented. The Model 30 memory is described.

CHAPTER 5: USING A TAPE CASSETTE

Tape cassettes are described. Each tape cassette command is individually discussed.

CHAPTER 6: SPECIAL FUNCTION KEYS

The uses of these keys as typing-aids, as functions, and as programs are discussed.

APPENDIX A: CALCULATOR AND PRINTER INSTALLATION PROCEDURE

Initial turn-on and inspection procedures are presented. *This appendix should be read immediately upon arrival of the calculator and printer.*

APPENDIX B: GENERAL OWNER'S INFORMATION

Equipment supplied, service information, etc. are all described.

APPENDIX C: ROM OPTIONS

Available ROM's are described and a general installation procedure is given.

APPENDIX D: MODEL 60 CARD READER

For those who have purchased this accessory, a general description is given.

APPENDIX E: ERROR CODES

The error codes and messages are listed along with some additional explanations.

APPENDIX F: PRINTER OPERATING PROCEDURES

Printing commands and examples are given. A table, which shows the ASCII characters that can be output using the FORMAT B statement, is included.

PREFACE



This book is organized both:

- With a logical arrangement of topics so that it can be read straight through, if desired; and
- As a reference guide, with major topics 'tabbed' at the right side of appropriate pages.

The quick index to the right of this page separates the tabbed information by chapter.

It is expected that the tabbed material will be most beneficial as a reference guide to Chapter 3, where each program statement is tabbed, and to Chapter 5, where each tape command is tabbed.

Wherever possible, major topics are self-contained; that is, it's not necessary to read an entire chapter to extract one idea.

However, since Chapter 1 discusses the special features of the calculator, you should understand the material in this chapter before going on to isolated topics.

Chapter 1

General Operating Information

Chapter 2

Using the Model 30 Keyboard

Chapter 3

Programming & Programming Statements

Chapter 4

Programming-Related Information

Chapter 5

Using a Tape Cassette

Chapter 6

Special Function Keys

Appendices

TABLE OF CONTENTS

MANUAL SUMMARY	ii
PREFACE	iii

CHAPTERS

CHAPTER 1: GENERAL OPERATING INFORMATION

PREPARING THE CALCULATOR FOR USE	1-1
CHARACTERISTICS OF THE MODEL 30	1-2
The Keyboard	1-2
The Display	1-2
Line Length	1-3
Range	1-3
Memory	1-3
Error Messages	1-4
A PREVIEW OF THE KEYS	1-4

CHAPTER 2: USING THE MODEL 30 KEYBOARD

THE FORMAT KEYS	2-1
STD key	2-1
FIXED N key	2-2
FLOAT N key	2-3
SIGNIFICANT DIGITS	2-4
ROUNDING	2-5
ARITHMETIC	2-6
Calculating	2-6
Arithmetic Hierarchy	2-6
RESULT key	2-8
VARIABLES	2-8
Simple Variables	2-8
Array Variables	2-9
EDITING IN CALCULATOR MODE	2-10
ADDITIONAL KEYS	2-11
← and → keys	2-12
RECALL key	2-12
PRT ALL key	2-13
SCRATCH key	2-14
FUNCTIONS	2-14
Mathematical Functions	2-14
Trigonometric Functions	2-17
Mathematical Hierarchy	2-18
LOGICAL EVALUATION	2-19
Relational Operators	2-19
Logical Operators	2-20

TOTAL MATHEMATICAL HIERARCHY	2-21
ADDITIONAL FEATURES	2-22
Simultaneous Calculations	2-22
PRINT and WRITE statements	2-22

CHAPTER 3: PROGRAMMING AND PROGRAMMING STATEMENTS

PROGRAM WRITING	3-1
PROGRAM EXECUTION	3-2
ASSIGNMENT	3-3
PRINT	3-4
DISP	3-6
STOP, END	3-7
INPUT	3-8
IF	3-9
GOTO	3-10
REM	3-11
FOR ... NEXT	3-12
FOR ... NEXT with STEP	3-15
WAIT	3-17
READ ... DATA	3-18
READ ... DATA with RESTORE	3-20
WRITE	3-21
FORMAT	3-22
PRINT with TAB	3-28
GOSUB ... RETURN	3-30
GOTO & GOSUB with OF	3-31
DEF FN	3-32
Single-Line Functions	3-32
Multiple-Line Functions	3-33
ARRAYS	3-36
Concepts	3-36
Programming Data Elements into Arrays	3-37
DIM	3-38
COM	3-39
ADDITIONAL STATEMENTS	3-41
FIXED N, FLOAT N, and STANDARD statements	3-41
DEG, GRAD, and RAD statements	3-42
Programmable Tape Commands	3-42
FLOWCHARTING TECHNIQUES	3-42
BASIC SYNTAXES	3-44

(Continued)

CHAPTERS

CHAPTER 4: PROGRAMMING-RELATED INFORMATION

STANDARD PROGRAMMING COMMANDS	4-1
RUN key	4-2
STOP key	4-3
CONT key	4-4
TIME-SAVING COMMANDS	4-4
AUTO # key	4-4
REN command	4-5
PROGRAM VIEWING	4-6
FETCH key	4-6
↓ and ↑ keys	4-6
LIST key	4-7
PROGRAM EDITING	4-8
BACK, FORWARD and INSERT keys	4-8
RECALL key	4-8
DELETE LINE key	4-8
DEL command	4-8
SCRATCH key	4-9
PROGRAMMING CHECKS	4-10
TRACE and NORMAL keys	4-10
STEP key	4-10
Checking a Halted Program	4-11
CALCULATOR MEMORY	4-12
LIST key	4-12
INIT key	4-13
ADDITIONAL COMMANDS	4-14
INIT key	4-14
PTAPE command	4-14
SEC command	4-15

CHAPTER 5: USING A TAPE CASSETTE

THE TAPE CASSETTE	5-1
Specifications	5-1
Other Cassettes	5-1
Inserting Tape Cassettes	5-1
Protecting Cassettes	5-1
Storing Cassettes	5-2
Cleaning the Tape Head	5-2
Tape File Structure	5-3

CASSETTE COMMANDS	5-4
Programmability	5-4
Syntax	5-4
MARK	5-6
Marking New Tapes	5-6
Marking a Used Tape	5-7
STORE	5-8
LOAD	5-10
LINK	5-13
MERGE	5-14
FIND	5-16
REWIND	5-17
STORE DATA	5-18
LOAD DATA	5-19
STORE KEY	5-21
LOAD KEY	5-21
LOAD BIN	5-22
TLIST	5-23
PERIPHERAL CASSETTES	5-24
CASSETTE SYNTAXES	5-25

CHAPTER 6: SPECIAL FUNCTION KEYS

ENTERING AND EXITING KEY MODE	6-1
KEYS AS TEXT	6-2
KEYS AS FUNCTIONS	6-3
KEYS AS PROGRAMS	6-4
ADDITIONAL KEY OPERATIONS	6-6
Keyboard Commands	6-6
Cassette Commands	6-7
Key Overlays	6-7

(Continued)

◆◆◆◆◆◆◆◆◆◆ **APPENDICES** ◆◆◆◆◆◆◆◆◆◆

APPENDIX A: CALCULATOR AND PRINTER INSTALLATION PROCEDURES

THE CALCULATOR	A-1
Inspection Procedure	A-1
Power Requirements	A-1
Power Outlets	A-2
Grounding Requirements	A-2
Fuses	A-2
Initial Turn-On	A-3
Cleaning the Calculator	A-3
PRIMARY PRINTERS	A-4
THE 9866A PRINTER	A-4
Description	A-4
Initial Turn-On	A-5
Loading Printer Paper	A-5

APPENDIX B: GENERAL OWNER'S INFORMATION

EQUIPMENT SUPPLIED	B-1
SERVICE CONTRACTS	B-2
PROGRAM PACS	B-2
KEYBOARD MAGAZINE	B-2
MEMORY OPTIONS	B-2
OPTIONAL EQUIPMENT	B-3
CONNECTING PERIPHERAL DEVICES	B-3

APPENDIX C: ROM OPTIONS

GENERAL DESCRIPTION	C-1
INSTALLING A PLUG-IN ROM	C-1
HOW TO ORDER A ROM	C-2
THE ROM'S	C-3
Matrix Operations	C-3
Plotter Control	C-3
Extended I/O	C-3
String Variables	C-4
Terminal	C-4

APPENDIX D: MODEL 60 CARD READER

GENERAL INFORMATION	D-1
CARD READER OPERATION	D-2
Inspection	D-2
Installation	D-2
Using the Card Reader	D-2
Encoding	D-4

APPENDIX E: ERROR CODES

RECOVERABLE vs NON-RECOVERABLE ERRORS	E-1
ERROR MESSAGES	E-2

APPENDIX F: PRINTER OPERATING PROCEDURES

PRINTER SELECT CODE	F-1
THE 9866A PRINTER	F-1
THE 9861A OUTPUT TYPEWRITER	F-1
THE TELETYPE 38 ASR DATA TERMINAL	F-4
PRINTER CHARACTER CODES	F-5

INDEX	see back of manual
-------	--------------------

FIGURES

Figure 1-1. The Model 30 Calculator	1-3
Figure 5-1. HP Tape Cassette	5-2
Figure 5-2. Cleaning the Tape Head	5-2
Figure 5-3. Tape Structure	5-3
Figure 5-4. Marking Successive Files	5-7
Figure A-1. The Rear Panel	A-2
Figure A-2. Switch Setting for the Nominal Powerline Voltages	A-3
Figure A-3. Connecting the 9866A Printer	A-5
Figure B-1. Power Cords	B-2
Figure B-2. Connecting an I/O Card	B-3
Figure C-1. Plug-in ROM'S	C-2
Figure D-1. 9860A Marked Card Reader	D-1
Figure D-2. The Program Card	D-5
Figure E-1. Model 9830A Keyboard	E-3

TABLES

Table B-1. Standard Accessories Supplied	B-1
Table B-2. 9800 Series Calculator Peripherals	B-3
Table D-1. Card Reader Equipment	D-2
Table D-2. Key Codes	D-3
Table E-1. Additional Error-Message Explanations	E-2
Table E-2. Error Codes	E-3
Table F-1. Printer Operations	F-3
Table F-2. Printer Characters and Equivalent Decimal Codes	F-6

CAUTION

The inspection procedure for the Model 30 is presented in Appendix A of this book. Please refer there:

- If the calculator and printer have not been inspected, or
- If there is any doubt regarding the compatibility of the calculator power requirements to the voltage in your area.

Otherwise, the calculator and printer could be severely damaged.

Chapter 1

GENERAL OPERATING INFORMATION

It is assumed here that the Model 30 is set up to operate in your area — if there is any doubt whatsoever, please refer to Appendix A of this book.

This chapter contains background material for the remaining chapters in this book.

PREPARING THE
CALCULATOR
FOR USE

◆ PREPARING THE CALCULATOR FOR USE ◆

There are a few things you should check each time you plan to use the calculator.

If the calculator is turned off:

- Set the OFF/ON switch to the ON position.
- When the following display appears, the calculator is ready to operate:

LINE
OFF  ON



- If the display remains blank, refer to Appendix A for plug-in instructions.

If the calculator is turned on and the display is blank:

- Hold the STOP key down until STOP appears on the display.
- If the display remains blank, turn the calculator off, then a few seconds later, turn it on again.
- If the display still remains blank, refer to Appendix A for plug-in instructions.

If the calculator is turned on and the display is not blank:

- If you wish to do calculations, just follow the arithmetic rules discussed in Chapter 2.
- If you wish to do programming, first check with other users to ensure that nothing important is in memory (memory is the term used to denote the area in which a user can put pertinent information — such as a program); if there is no need to retain the information in memory, turn the calculator off, then a few seconds later, on again. This procedure erases whatever was previously in memory.

CHARACTERISTICS OF THE MODEL 30

THE KEYBOARD

A representation of the Model 30 keyboard is shown in Figure 1-1. The keyboard is divided into specified areas as described below.

- **Alphanumeric Keys** — This area acts very much like a standard typewriter keyboard. If, for instance, you want to display the dollar sign, \$, you must have the SHIFT key held down when you press $\left(\frac{5}{4}\right)$. It differs from a standard typewriter in that letters always appear in upper case on the display.
- **Numeric Keys** — This area conveniently locates a set of numbers to the left of the five arithmetic keys. If, however, you feel more comfortable using the other set of numbers (in the alphanumeric region), go right ahead. It makes no difference to the calculator.
- **Arithmetic Keys** — The standard arithmetic operators, addition, subtraction, multiplication, division, and exponentiation, are located here.
- **Special Function Keys** — The keys in the upper left-hand region of the keyboard, f_0 through f_9 , add considerable flexibility to the calculator. These keys are discussed in Chapter 6.
- The rest of the keys in the upper half of the keyboard are helpful in a variety of ways. Some are especially useful as editing tools, while others have more specific uses. The keys are described, in appropriate places, throughout this book.

Keys that are the same color have similar operating characteristics. As you become more familiar with the Model 30, these similarities will become evident.

Here are a few more topics related to keyboard operations:

- **Spacing** — In general it makes no difference what spacing you use either in calculating or in programming; for example, $4+6$ or $4 + 6$ are interpreted the same by the calculator. There are, however, certain instances when you can set a specific spacing for outputting purposes, say, in PRINT and DISP statements, which are discussed in Chapter 3.
- **Repetition of Operations** — Most keys, when held down for about two seconds, rapidly repeat their operation. With certain editing keys, this is a particularly useful feature.
- **Upper and Lower Case Alphabets** — The display on the calculator shows letters only in upper case. But if you have a printer with lower case capabilities, information can be printed that way; more about that later when the PRINT statement is discussed.
- **@ Symbol** — If you ever need this symbol, you can obtain it by pressing the RESULT key when the SHIFT key is depressed.
- **⌊ Symbol** — When the display is clear and awaiting inputs, '⌊' is located in the left-hand corner of the display; the first character then keyed in replaces this symbol in the display. '⌊' also appears at the end of a program line that is returned to the display from memory.

THE DISPLAY

Up to 32 characters can appear on the display at any one time.

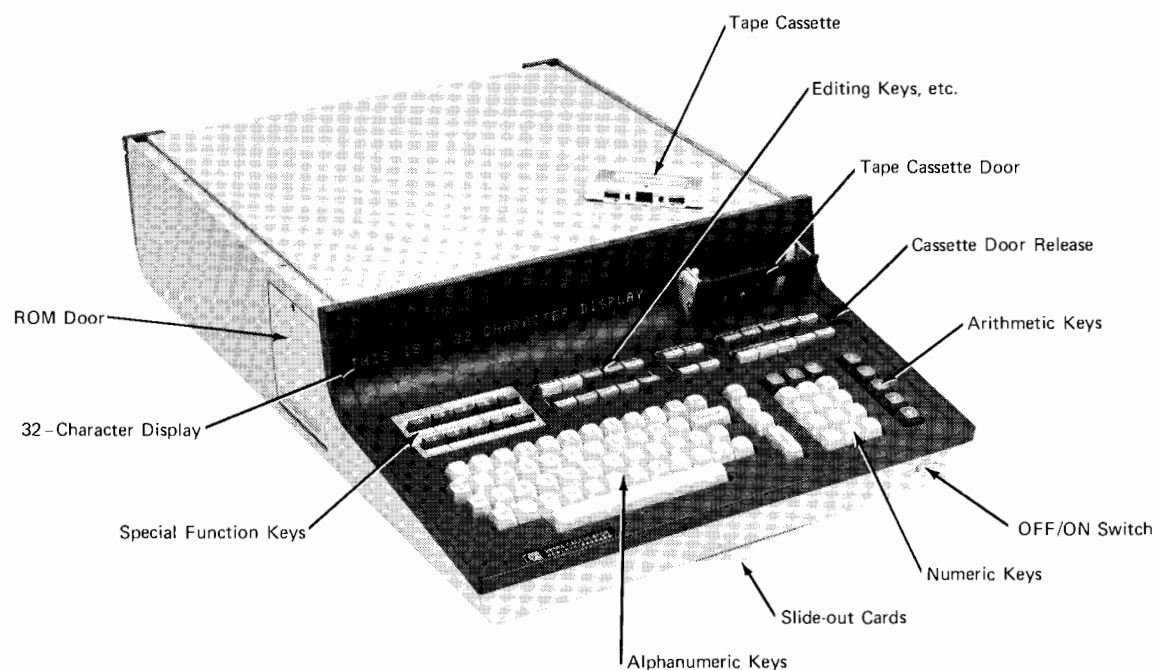


Figure 1-1. The Model 30 Calculator


LINE LENGTH

Even though only 32 characters can be displayed at any one time, up to 80 characters can be keyed into the same expression. After the 32nd character is keyed in, additional characters that are keyed in cause the display region to be shifted to the left. After the 72nd character is keyed in, a soft beep occurs, informing the user that only eight more characters can be keyed in.

Any portion of the line can be reviewed on the display as you will see in Chapter 2.

RANGE

The calculating range of the Model 30 is $-9.9999999999 \times 10^{99}$ through -1×10^{-99} , 0, and 1×10^{-99} through $9.9999999999 \times 10^{99}$. The pictorial representation below shows an exaggerated representation of the non-defined (cross hatched) areas.

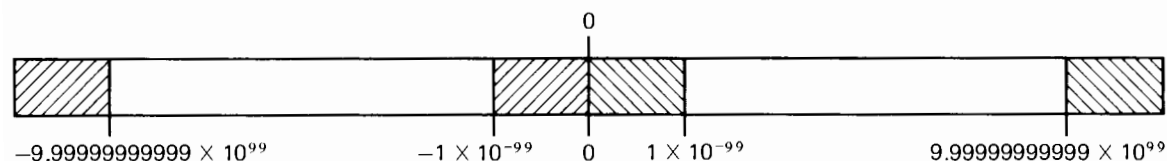

MEMORY

The calculator has an allocated amount of user memory. The amount of memory is expressed in 'words', which is a computer-oriented measuring stick. By keying in a few programs and seeing how much (or how little) memory is used by these programs, you will soon have a good feel for just how large a program you can input. (For the computer oriented, you'll be interested to know that each word is made up of 16 bits – two bytes.) The calculator memory is discussed in Chapter 4.

CHARACTERISTICS OF THE MODEL 30

(continued)

ERROR MESSAGES

Occasionally the word, ERROR, followed by a number, will appear on the display at the same time that the calculator makes a soft beeping sound. This indicates that an error has occurred. The number references an error message that helps to pinpoint the cause of the error.

If an error message appears during an attempt to run a program, the program line in which the error occurs will be referenced, also.

A complete listing of the error messages appears both on a slide-out card underneath the Model 30 and in Appendix E of this book. An explanation of recoverable versus non-recoverable errors is given in Appendix E.

A PREVIEW OF THE KEYS

CLEAR

In general, when the CLEAR key is pressed, whatever was previously on the display will be erased; but the following exceptions may occur:

- If, when the CLEAR key is pressed, the following display appears:

KEYF

the Special Function mode has somehow been previously accessed (see Chapter 6). To get out of this mode and to clear the display, press:

END

- If the display 'blanks out' while the calculator is turned on, hold the STOP key down until STOP appears on the display; then you can press the CLEAR key and continue inputting. If your display continues to go blank, you may find that your printer is not properly attached to the calculator; in this case, see Appendix A.
- If you can't locate your problem and yet you seem to have no control over the keyboard, turn the calculator off and then, in a few seconds, on again. (This procedure may be the last resort in some cases, though; for if you had previously put something into the user's memory area, it is erased by turning the Model 30 off.)

EXECUTE

Almost every sequence of keys that is pressed to accomplish a goal needs to be completed with the EXECUTE key; when this key is pressed, the previous instructions to the calculator are performed. One major exception to this rule comes about when inputting program lines to memory (see below). Other exceptions are keys, such as **PRTALL** and **RECALL**, which are immediately executed when pressed.

END OF LINE

At the completion of each program line that is keyed in, the END OF LINE key must be pressed to put the information in memory.

Chapter 2

USING THE MODEL 30 KEYBOARD

Most keys, when pressed, cause the character or characters represented on the particular keys to be displayed. There are, of course, exceptions. As you learn about the various keys, it will become apparent why a particular key acts as it does. Three keys have already been discussed:


- CLEAR — which erases the display;
- EXECUTE — which performs the operation indicated in the display;
- END OF LINE — which puts program lines into memory.

In this chapter, several other keys and operations will be discussed. Non-programming (calculator mode) applications are emphasized. Many of the tools discussed, however, can also be used in the 'programming mode' as shown in Chapter 4.

◆◆◆◆◆ THE FORMAT KEYS ◆◆◆◆◆

When the calculator is turned on, it assumes a 'standard' operating form. The results of arithmetic calculations then appear in one of two ways, depending on the size of the number, as shown in the following representation:

1. The form of numbers in this range is $\pm Z.ZZZZZE\pm ZZ$.
2. Numbers in this range appear as commonly written.

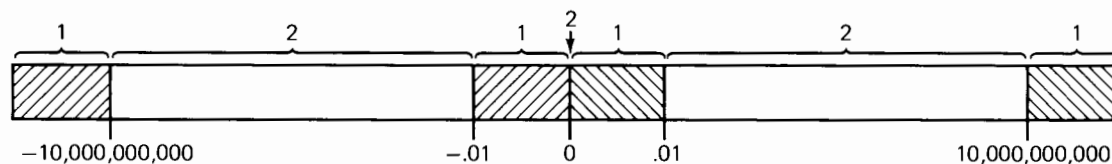

For both the very small and the very large numbers, a scientific (or floating point) notation is used, where $\pm Z.ZZZZZE\pm ZZ$ corresponds to the mathematical representation, $\pm Z.ZZZZZ \times 10^{\pm ZZ}$. This representation will be discussed in greater detail with the subject matter to follow shortly — FLOAT N.

STD

As mentioned, the calculator initially assumes a 'standard' operating mode. But the operating mode can be changed either to 'fixed' or to 'floating' point (as discussed next). The standard mode can then be returned if the STD key is pressed.

If you need specified output formats, either fixed or floating-point notation should be used. But for normal calculations, the standard mode is often most convenient since the outputs of calculations appear in an easily readable manner.

(continued)

THE FORMAT KEYS

(continued)

Here are the rules that outputs in standard mode follow:


- No more than 10 digits total can be output, with no more than 9 digits to the right of the decimal point; for example:
 9876543210.6 would be output as 9876543211 (notice the tenth digit is rounded); and
 .0123456789 would be output as 0.012345679 (at least one digit is always displayed to the left of the decimal point; so, in this case, the ninth digit to the right of the decimal point is rounded from 8 to 9).
- Excess zeros to the right of the decimal point are suppressed; for example:
 32.1000 would be output as 32.1; but
 32.111199999 would be rounded to 32.11120000 (in this case, the zeros are output since they were the result of rounding).
- As shown on the pictorial on page 2-1, numbers outside the range $[-10,000,000,000 \text{ through } -.01, 0, +.01 \text{ through } +10,000,000,000]$ are output in a scientific notation. The form is the same as float-5 notation.

Here are some numbers and their output form when standard notation is used:


	Standard Output
12.03	12.03
18.7654	18.7654
15	15
-832.600	-832.6
987654321.234	987654321.2
123456789123.0	1.23457E+11
-.0004	-4.00000E-04

FIXED N

Fixed-point notation is commonly used for a variety of problems. In 'fixed-point' the user can specify the number of digits to appear to the right of the decimal point; in payroll problems for instance, two digits to the right of the decimal point would be required — hence 'fixed-2 notation'. This notation can be obtained if you press:




Now the results of calculations will appear with two digits to the right of the decimal point. For instance, if you press:



The results of other calculations now will appear with two digits to the right of the decimal point, also. However, the result of a calculation could be too large to appear in fixed-point form. In such circumstances, the calculator reverts to floating-point (in our case, it would revert to float-2). Floating-point notation is described at the conclusion of the fixed-point discussion.

Fixed-0 through fixed-11 notation can be specified. In each case the numeric indicates the number of digits that will appear to the right of the decimal point. (However, in fixed-0, since there are no digits to the right of the decimal point, the decimal point is omitted.)

Here's another example. Press:



Here are some numbers and their output form if, say, fixed-3 notation is used:

	Fixed-3 Output
18	18.000
.000006	0.000
-2.7531	-2.753
4.56789	4.568
1234567891234.5	1.235E+12†



† If fixed-point notation is specified and the result of a calculation has more than 12 digits to the left of the decimal point, the calculator temporarily reverts to floating-point. Notice, however, that in this example, three digits are retained to the right of the decimal point to parallel the desired fixed-point notation.

Occasionally a result, slightly different from the expected, may appear on the display; the two topics following the floating-point discussion — Significant Digits and Rounding — explain these situations.


FLOAT N

Floating-point (often called scientific notation) is a convenient form when the results of calculations are either very large or very small. Its form is as follows:

$$\pm Z.Z \cdots ZE \pm ZZ$$

- The first non-zero digit of a number is the first digit displayed (if the number is negative, a minus sign precedes this digit);
- A decimal point follows the first digit;
- Some digits follow the decimal point; the amount is determined by the specified floating-point form (e.g., in float-5, five digits would follow the decimal point);
- Then the character 'E' appears, followed by a sign and two digits — this is the exponent, representing a positive or negative power of ten, which indicates the direction and the number of places that the decimal point would have to be moved to express the number in fixed-point form.

Here's an example. Press:




If the sign following the E is positive (as in this example), then the decimal point can be moved to the right the number of places indicated by the exponent (in this case, 4) to express the number in fixed-point form.

(continued)

THE FORMAT KEYS

(continued)

Here's another example. Press:



Since the sign of the exponent in this example is minus, the decimal point can be moved to the left three places (as indicated by the exponent '03') to express the number in fixed-point form.

Float-0 through float-11 can all be specified. In each case, the numeric indicates the number of digits that will appear immediately to the right of the decimal point. (However, in float-0, since there are no digits to the right of the decimal point, the decimal point is omitted.)

Here are some numbers and their output form if, say, float-2 notation is used:

	Float-2 Output
-3.2	-3.20E+00
271	2.71E+02
26.3777	2.64E+01
.0004	4.00E-04
2.4E78†	2.40E+78

† This entry could be keyed in by using either of the following two keys:

ENTER
EXP
 or the alphabetic key E

In numerical inputs, these two keys are interpreted as a floating-point input. For instance, the previous example can be keyed in and executed as:

2
.
4
ENTER
EXP
7
8

For the number, 6000, the following entries would all be equivalent:

6
0
0
0
 or
 6
E
3
 or
 6
0
ENTER
EXP
2

SIGNIFICANT DIGITS

The number of digits output in a calculation depends on the notation that is used. However, regardless of the notation, the Model 30 internally retains 12 significant digits for the output; that is, it calculates to 12-point accuracy.

The 12-point accuracy can always be displayed on outputs if either fixed-11 or float-11 notation is specified. But in any notation, if more than twelve digits are to be output, all digits after the twelfth are truncated and replaced by zeros; for example, in fixed-5 notation, when executed, the number 123456789.56789 (having 14 digits) would be

displayed as:

123456789.56700

Notice that the last two digits of the number (8 and 9) are ignored and zeros are displayed in their place — since the '7' preceding them was the twelfth significant digit.

ROUNDING

If the result of a calculation has fewer than thirteen digits, it is rounded if there are more digits to the right of the decimal point than the specified notation will allow. The rounding is performed as follows: the first excess digit is checked; if its value is 5 or above, the digit immediately preceding it is incremented (rounded-up) by one. For example, press:

FIXED N 1 **EXECUTE** and 2 4 . 2 7 **EXECUTE** 24.3

The '2' is rounded to '3' since it is the last allowable digit to be displayed in this notation and since the digit following it is a '7'. Now key in:

FLOAT N 1 **EXECUTE** and 2 4 . 2 7 **EXECUTE** 2.4E+01


In this example, the digit checked is the one following the 4. Since its value (2) is less than 5, it, together with the following digits, is truncated (rounded-down).

◆◆◆◆◆ ARITHMETIC ◆◆◆◆◆

The five basic numerical operations and their respective symbols are as follows: addition (+), subtraction (−), multiplication (*), division (/), and exponentiation (↑).

CALCULATING

To perform basic calculations, such as 4 multiplied by 3, simply do the following. Press:




The EXECUTE key must be pressed to evaluate any keyed-in expression.

In standard notation, the following result appears on the display:





To raise 2 to the third power (2^3), press:



Notice, however, that 2^{-3} must be keyed in as $2\uparrow(-3)$, that is, parentheses are required to separate the minus sign from the exponentiation symbol.

To divide 10 by 2.5, press:



ARITHMETIC HIERARCHY

In a mathematical expression (which is a sequence of numbers separated by numeric symbols), there is a prescribed order of execution; the order of execution, called the hierarchy, is the same as the order commonly used in standard arithmetic; it is:

1. ↑ highest precedence
2. * /
3. + − lowest precedence

The order of execution is from highest precedence to lowest precedence.

When an expression contains two or more symbols at the same level in the hierarchy, the order of execution is from left to right.

The prescribed order of execution can be altered if parentheses are used; operations within parentheses are performed prior to operations outside parentheses regardless of the hierarchy. Furthermore, parentheses can be nested (i.e., parentheses within parentheses are allowed); when nesting occurs, the 'deepest' nest is calculated first; e.g., in $(5*(4-2))$, the portion $(4-2)$ is simplified first.

In the following two examples, the internal step-by-step procedure that the calculator goes through, when executing an expression, is presented. By being able to predict the order of execution in the calculator, you will be capable of keying in quite complex expressions. Here is the expression:

$$4+6/2*(3+7)$$

1. First, the operation inside the parentheses is evaluated, thus reducing the expression to:

$$4+6/2*10$$

2. Then the calculator looks for the symbol with the highest precedence; since both / and * have the same precedence, the calculator evaluates these two operations from left to right:

$$\begin{array}{l} 4+3*10 \\ 4+30 \end{array}$$

3. Finally, the addition (having the lowest precedence) is performed; the result is then displayed in whatever format was previously specified. In standard notation it would appear as:

$$\boxed{34}$$

Fortunately, when the EXECUTE key is pressed, the expression is evaluated considerably faster than the previous explanation might imply. Here's an expression that is somewhat more complex:

$$2*3\uparrow 3+4*((5-3)/2+1)$$

1. Taken step-by-step, this equation also is easily simplified; first, the expression in the most deeply nested parentheses, $(5-3)$, is evaluated:

$$2*3\uparrow 3+4*(2/2+1)$$

2. Then the expression in the remaining parentheses is simplified, and since division is above addition in the hierarchy, it is performed first:

$$2*3\uparrow 3+4*(1+1)$$

3. These parentheses are then totally eliminated:

$$2*3\uparrow 3+4*2$$

4. Now the operation with the highest precedence in the hierarchy, exponentiation, is performed; this reduces the expression to:

$$2*27+4*2$$

5. The two multiplication operations can then be evaluated:

$$54+8$$

6. So if the original expression is keyed in and the EXECUTE key is pressed, the result will appear on the display; in standard notation it will appear as:

$$\boxed{62}$$

NOTE

Using parentheses for 'implied' multiplication is not allowed; hence, $4(5-2)$ must appear as $4*(5-2)$.


ARITHMETIC

(continued)


RESULT

An extremely useful key, when performing arithmetic operations, is the RESULT key. It has two specific applications:


- It can be used to display the numerical value of the last arithmetic statement that was executed. Just press:



- It can be pressed during arithmetic operations, allowing you to use the result of the last calculation in the current expression. For example, by executing 3+4, 7 is displayed; then by pressing:

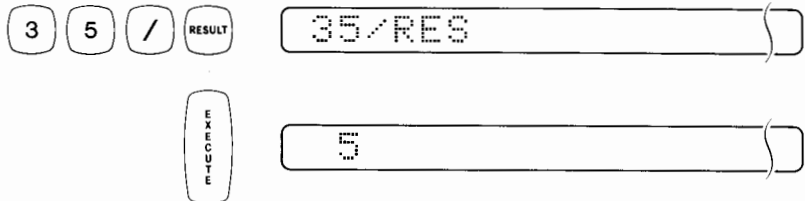

The previous result of 7 was divided into 35, leaving a current result of 5. Now by keying in:

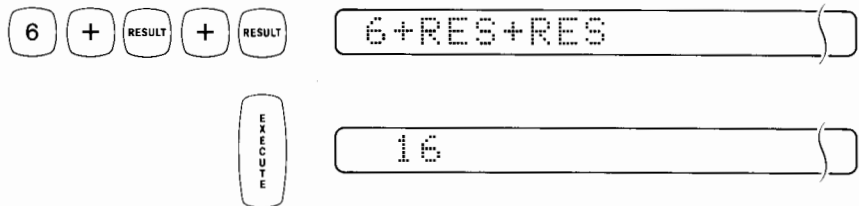

The previous result (this time, 5) was added twice to the number 6.

VARIABLES

Often it is convenient to assign values to letters and then use these letters in expressions. In programs a letter can have its value constantly updated — hence, the term ‘variable’. In some cases a letter (variable) is used as an intermediate storage device; for instance, to keep the current summation of a group of numbers being added together. Other times, a variable in a particular formula may have several different values inserted into the formula to determine what effect these values have on the result. A letter can also be used for convenience; just as π is used to designate the value 3.14159265... , an equally cumbersome number that you are using over and over can be designated by a letter.

SIMPLE VARIABLES


On the Model 30 the following simple variables are allowed:

- Any letter — from A through Z.
- Any letter immediately followed by a digit — from Ø through 9.

For instance, acceptable simple variables are: B3, G, HØ, M, M9, Y.


In all, 286 simple variables are allowed.

In either the calculator or programming mode†, simple variables can be assigned values. Below, two variables are assigned values. Press:




In the assignment statement, the variable name appears first, followed by the equals sign, and then the value assigned to the variable.

The variables A3 and B now are assigned the values 72 and 12, respectively. If we press the keys shown below and then press the EXECUTE key, in standard notation the following displays will appear:

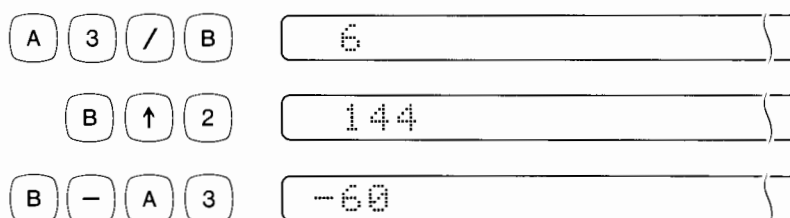

In these examples, the variable names are keyed into the arithmetic expressions and when the expressions are executed, the previously assigned values for the variables are used. So the first example is really just 72/12.

Variables can be reassigned values, either indirectly or directly; for instance, to reassign B equal to 13, press either:



Then in any additional arithmetic expression, B is equal to 13.

ARRAY VARIABLES

Another type of variable is the array variable. To use array variables in the calculator mode, you must 'initialize' the calculator as discussed on page 4-14. Arrays become quite useful in the programming mode, especially when manipulating matrices. Array variables can be either one or two dimensional; for instance:

- A(3) is a one-dimensional array, containing up to three specific items – A(1), A(2), and A(3);
- A(3,3) is a two-dimensional array, containing up to nine specific items – A(1,1), A(1,2), A(1,3), A(2,1), A(2,2), A(2,3), A(3,1), A(3,2), A(3,3).

(continued)

† The 'calculator mode' refers to non-programming operations whereas the 'programming mode' refers to programming operations.

VARIABLES

(continued)

On the Model 30 the following array variables are allowed:

- Any letter — from A through Z — followed by
- Either one or two numbers enclosed within parentheses (where 256 is the maximum size of either number).

When two numbers are enclosed within the parentheses, they must be separated by commas.

Arrays will be discussed more completely on page 3-36.

EDITING IN CALCULATOR MODE

In the 'calculator mode' (that is, for non-programming operations), several editing keys are available. But before these keys are discussed, a brief introduction to the operating characteristics of the display is needed.

The calculator, by necessity, keeps track of where it is located on the display with a mechanism, which we will refer to as a 'pointer'. The pointer determines the location of the next character to be keyed in.

During normal keyboard operations, with characters being keyed into the display from left to right, the pointer isn't visible to the user. But, when the normal left to right sequence is altered, the pointer becomes visible. For, when the pointer is located at a previously keyed-in character, the character space flashes alternately with the character that's there.

The editing keys are as follows:

- **BACK** which moves the pointer one character space to the left each time it's pressed (until the leftmost portion of the display is accessed).
- **FORWARD** which moves the visible pointer one character space to the right each time it's pressed (until the pointer becomes invisible).
- **INSERT** which opens up a character space immediately to the left of the visible pointer.
- **SHIFT** **INSERT** which deletes the character space where the visible pointer is located (SHIFT must be held down when INSERT is pressed).

Each of these keys, when held down for about two seconds, will rapidly repeat its operation.

Here's an example using these editing keys:

Press the keys:

(1) (2) (3) (3) (4) (5) (6) (7) (8) (9)

Now let's add the two quantities:

-1234
+56789

So we have to add a minus sign in front of the 1, delete one of the 3's and put a plus sign in front of the 5.

- First let's locate the pointer at the leftmost character space. Press **BACK** and keep it held down until the pointer is located at the 1. (Since the pointer cannot move past this location, it must stop there.)
- Now press **INSERT**. A character space opens up to the left of the 1. The minus sign can then be keyed in.

-1233456789

- Now press **FORWARD** twice. This locates the pointer at the first 3, which can now be deleted by pressing the keys – SHIFT INSERT. This deletes both the 3 and the character space. (With the pointer located at the first 3, the space bar could have been pressed to delete the 3; however, the blank character space would have remained.)

-123456789

- The pointer is now located at the remaining 3. To put a plus sign between the 4 and 5, it is necessary to press **FORWARD** twice; this locates the pointer at the 5. Then press **INSERT**. A space is opened up to the left of the 5. The plus sign can then be keyed in.

-1234+56789

- The expression can be immediately executed regardless of the pointer's position.

EXECUTE

55555



ADDITIONAL KEYS

ADDITIONAL KEYS

In the calculator mode, the following keys also can be used:

- which, for displays of greater than 32 characters, allows you to review the beginning of the display.
- ←** which, for displays of greater than 32 characters, allows you to review the end of the display.
- RECALL** which allows you to review the previous expression or key sequence that was executed.
- PRT ALL** which allows you to keep a printed record of whatever you're doing.
- SCRATCH** which erases memory.

In the following paragraphs, these keys are discussed in detail.

(continued)

† The arrow shows the position of the blinking indicator.

◆◆◆◆◆ ADDITIONAL KEYS ◆◆◆◆◆

(continued)



With these two keys, an input of up to 80 characters can be viewed on the 32-character display.

Key in the following expression, which repeats each numerical digit eight times:

11111111+22222222+33333333+44444444+55555555+66666666+77777777+88888888+99999999

↑
NOTE 1

↑
NOTE 2

Note 1:

Notice that when the fifth '4' is keyed in, the 32-character display has been filled. Each additional character then pushes the display region one character space to the left, thus eliminating the leftmost character from the display.

Note 2:

Notice also that when the last '+' sign is keyed in, the calculator makes a soft beeping sound, informing the user that 72 of the allowable 80 characters have been keyed in.

After the last '9' has been keyed in, the display looks like this:

66666+77777777+88888888+99999999

To view any other portion of the expression, hold (the right arrow) down for a few seconds; the display region is rapidly pushed to the right. When the portion of the display that you want to see is visible, just release this key. If you are at the end of the display and you want to view the beginning, just hold down for about five seconds and the beginning of the display should be visible; it doesn't matter if you hold the key down longer because once the leftmost 32 characters are displayed, has no more effect.

To view the end of the display, you can use (the left arrow). It performs the reverse operation of the right arrow. When is pressed, the display region is pushed to the left.

Of course, either key can be used to shift the display region one character space at a time. So to push the display region three spaces to the right, just press three times.

In all cases after the eightieth character has been keyed in, it is impossible to input an eighty-first character. But the expression can be executed at any time; in this case, the result is:

4999999995

RECALL ◆

When the RECALL key is pressed, the last thing that was executed by the calculator is recalled to the display. The original expression can then be viewed, edited and re-executed if necessary. For example, press:

9
↑
(
4
-
(
7
*
.
5
)

If you execute this expression, the display will read:

ERROR 16

A quick check of the error codes shows that a right parenthesis is missing from the expression. If **RECALL** is then pressed, the original expression is recalled to the display:

9+(4-(7*.5)

The required right parenthesis can then be added to balance the equation:

9+(4-(7*.5))

Then the corrected expression can be executed:

3

PRT ALL

The PRT ALL (Print-All) key is used to obtain a printed record of your operations.

In the calculator mode with print-all in effect, everything in the display that is executed is recorded on the printer. The result of the execution is also printed.

Pressing **PRT ALL** either establishes or cancels print-all:

- If ON appears in the display, print-all is established.
- If OFF appears, print-all is cancelled.

By pressing **PRT ALL** a second time, the ON or OFF designation is reversed.

If the printer isn't connected to the calculator, be sure print-all is OFF; otherwise, the display will 'blank out' when the EXECUTE key is pressed (if this occurs, hold the STOP key down until STOP appears on the display to regain control of the calculator). Printer plug-in instructions are located in Appendix A of this book.

Here are some examples with print-all ON:

Keyboard Entries

Printouts



FIXED N 2 EXECUTE	FIXED2
3 6 5 * 2 4 EXECUTE	365*24 8760.00
3 + (4 * 5 EXECUTE	3+(4*5 ERROR 16
RECALL) EXECUTE	3+(4*5) 23.00




◆◆◆◆◆ ADDITIONAL KEYS ◆◆◆◆◆




(continued)




◆ SCRATCH

Different portions of memory can be erased with the following variations of the SCRATCH command:

  erases all variables from memory and program lines from mainline memory [programs on Special Function keys (see Chapter 6) are not affected]. In many cases, this command effectively erases all the memory.

   erases all of memory; it is the same as turning the calculator off and then on again.

   erases the values of all variables.

   erases all Special Function keys.

  erases the particular Special Function key that is pressed.

◆◆◆◆◆ FUNCTIONS ◆◆◆◆◆

The following paragraphs describe the mathematical and trigonometric functions in the Model 30.

MATHEMATICAL FUNCTIONS

The following mathematical functions can be executed:

ABS (expression) [†]	determines the absolute value of the expression;
EXP (expression)	raises the constant, e, to the power of the computed expression;
INT (expression)	gives the expression an integer value \leq the value of the expression;
LGT (expression)	determines the logarithm of a positively valued expression to the base 10;
LOG (expression)	determines the logarithm of a positively valued expression to the base 'e';
RND (expression)	gives a random number between 0 and 1; the expression is a dummy argument;

[†] Throughout this text, the word 'expression' includes constants (like 43.2), variables (like A), expressions (like 43.2*A), and other functions (like INT A).

SGN (expression)	returns a 1 if the expression is greater than zero, returns a 0 if the expression equals zero, or returns a -1 if the expression is less than zero;
SQR (expression)	computes the square root of a positively valued expression.

In general, it is wise to separate the expression by parentheses although parentheses are optional if the expression is either a positive constant, a variable, or another function.

As can be seen by the examples to follow, most of these functions are relatively easy to use; however, the RND function warrants the additional explanation given it.

In the standard mode, execute these key sequences:

- **A B S (2 - 7)** 5

which gives a positive value to the expression.

- **E X P 1** 2.718281828

which is the value of the constant, e, raised to the first power.

- **I N T (6 . 3 * 4)** 25

whereas,

- I N T (- 6 . 3 * 4)** -26

The integer value returned must be less than or equal to the result of the expression. So for a result of 25.2, 25 is returned; whereas for a result of -25.2, -26 is returned.

- **L G T 2** 0.301029996
- L O G 2** 0.693147181

LGT is used for determining logarithms to the base 10, whereas LOG is used for determining logarithms to the base 'e' (natural logs). The following key sequences show how the result of an expression can be determined if logarithms are used.

Here's a practical example. Suppose we wish to solve for X, where $X = 144^{111} / 121^{108}$. This equation cannot be solved by using regular mathematics, since the range of the calculator would be exceeded. But this equation can be solved by using logarithms and their mathematical rules. Using $Y = \log_{10} X$, key in and execute:

$$Y = 111 * \text{LGT} 144 - 108 * \text{LGT} 121$$

Then to solve for X, execute:

$$X = 10 \uparrow Y$$
4.33927E+14

(continued)

FUNCTIONS

(continued)

Whereas using $Y=\log_e X$, key in and execute:

$$Y=111 \cdot \text{LOG}144 - 108 \cdot \text{LOG}121$$

Then to solve for X, execute:

$$X=\text{EXP}Y$$

4.33927E+14

• R N D x [†]

0.039710839

A random number between 0 and 1 is displayed each time RND x is executed.

Often it is useful to have random numbers appear as integers that are within a certain range. For instance, random integers from 0 through 999 are output if you execute:

I N T (R N D x [†] * 1 0 0 0)

Now each time this expression is executed (this is easily accomplished if you press – RECALL EXECUTE), a new random number is generated.

Each time the calculator is turned on, the random number generator uses the same 'seed' (that is, the number upon which the sequencing is based). This causes the sequence of numbers to be the same each time the RND function is initially used. But you can avoid the repetition if you put in your own 'seed'. This is accomplished by executing:

R N D (– (n))

The negative sign causes the seed to be changed while the number input for 'n' becomes the new seed.

Some seeds do make better random number generators than others. To obtain a good seed, n should be a number between 0 and 1; the more digits the number has, the better – up to 11; and it is often preferable to make the last digit either a 1, 3, 7, or 9.

Here's an example of a good seed. Execute:

R N D (– . 1 2 3 4 5 6 7 8 9)

Now that the seed is generated, random numbers can once again be obtained by the method previously discussed.

The seed that the Model 30 itself uses is: $2-\pi/2$.

[†] where 'X' can be any positive number. The positive number used has absolutely no effect on the random number that is generated.

• S G N (6 * 7) 1

but

S G N (- 6 * 7) -1

Since the result of $6*7$ is positive, a '1' is returned; and since the result of $-6*7$ is negative, a '-1' is returned.

• S Q R 1 2 1 11

but

S Q R (- 1 2 1) ERROR 52

For the square root of a negative number is an 'imaginary' number.

TRIGONOMETRIC FUNCTIONS

The following trigonometric functions can be executed:

SIN (expression) [†]	which determines the sine of an expression.
COS (expression)	which determines the cosine of an expression.
TAN (expression)	which determines the tangent of an expression.
ATN (expression)	which determines the arctangent of an expression.

The angle is always assumed to be in radians, unless otherwise stated. However, the angle can be expressed in any of the following three ways:

DEG	which calculates angles in degrees.
GRAD	which calculates angles in grads.
RAD	which calculates angles in radians.

When one of these three forms is specified, all calculations assume the specified form.

To revert to one of the other two forms, it is necessary to execute the desired mnemonic.

Then, if all the memory is erased or if the calculator is initialized (see page 4-14), radians are once again assumed.

The value of π can be obtained if you key in:

P I When an expression encounters this, 3.14159265360 is assumed.

(Continued)

[†] Like the mathematical functions, it is generally wise to separate the expression by parentheses although parentheses are optional if the expression is either a positive constant, a variable, or another function.

FUNCTIONS

(Continued)

Here are some examples; execute the following key sequences:

S I N P I

T A N (P I / 2) 9.99999E+99

The last result approximates positive infinity. Now to compute angles in degrees, execute:

D E G

C O S (- 1 2 0) -0.5000000000

A T N 1 45

A T N S I N 9 0 45

The arcsine and arccosine functions are not directly obtainable on the Model 30. However, they can be easily obtained by using the following formulas – where x is the point at which the function is evaluated.

Arcsine $x = \text{ATN}(x/\text{SQR}(1-x^2))$

Arccosine $x = \text{ATN}(\text{SQR}(1 - x^2)/x)$

Here's an example; with the calculator still in degrees, the arcsine of .5 can be determined if you execute:

A T N (. 5 / S Q R (1 - . 5 ↑ 2))

30.00000000

MATHEMATICAL HIERARCHY

When functions are included in the arithmetic hierarchy†, they have the highest precedence. So the order of execution is as follows:

- | | |
|-----------------------------|--------------------|
| 1. Functions | highest precedence |
| 2. Exponentiation | |
| 3. Multiplication, Division | |
| 4. Addition, Subtraction | lowest precedence |

All other rules affecting the order of execution remain the same.

† The arithmetic hierarchy was presented on page 2-6.

LOGICAL EVALUATION

In logical evaluation, expressions[†] can be compared by using relational operators and/or logical operators. If the comparison is 'true', the value '1' is returned; if the comparison is 'false', the value '0' is returned.

RELATIONAL OPERATORS

These operators are used to determine the logical relationship between two expressions. They are as follows:

equality	=
inequality	# or <> [‡]
greater than	>
less than	<
greater than or equal to	>=
less than or equal to	<=



The equals sign is also used in assignment statements as shown on page 2-9. In assignment statements, the variable is to the left of the equals sign and the value to be assigned to this variable is to the right of the equals sign. If the equals sign is used in such a way that it might be either an assignment or relational operator, the Model 30 assumes it is an assignment operator.

Here are a few examples using relational operators:

First let's assign values to the variables A, B, C, and D. Execute:

A	=	1	<input type="text" value="1"/>
B	=	2	<input type="text" value="2"/>
C	=	3	<input type="text" value="3"/>
D	=	3	<input type="text" value="3"/>

Now execute these logical expressions:

- A<B which is true, so 1 is displayed.
- B<A which is false, so 0 is displayed.
- B#C which is true, so 1 is displayed.
- C#D which is false, so 0 is displayed.
- 3=C which is true, so 1 is displayed.
- 4=A which is false, so 0 is displayed.
- A=4 which is an assignment statement and not a logical statement; so A is assigned the value of 4.

Relational operators are very important in programming, especially when used in the IF statement, discussed on page 3-9.

[†] An expression can be a constant (like 7.2), a variable (like B), or an arithmetic expression (like 7.2*SQR6).

[‡] # corresponds to a shifted ; < corresponds to a shifted ; and > corresponds to a shifted .

LOGICAL EVALUATION

(Continued)

LOGICAL OPERATORS

The logical operators are as follows:

AND
OR
NOT

- AND compares two expressions. If both expressions are true, the result is true. If one or both of the expressions are false, the result is false.
- OR compares two expressions. If one or both of the expressions is true, the result is true. If neither expression is true, the result is false.
- NOT changes the logical value of an expression. If the expression is true, NOT changes it to false. If the expression is false, NOT changes it to true.

As stated earlier, if the result is true, a 1 is returned; if the result is false, a 0 is returned.

The expressions that the logical operators compare can be either relational or non-relational:

- If the expression is relational (like $A < B$), its true or false designation is determined by the particular relational value.
- If the expression is non-relational (like A), it is true if its arithmetic value is not equal to zero; it is false if its arithmetic value equals zero.

Here are some examples; first let's assign values to the variables A, B, C, and D. Execute:

A	=	0	
B	=	2	
C	=	4	
D	=	4	

Now execute these logical expressions:

$A < B$ AND $C = D$

Since both relational expressions, $A < B$ and $C = D$, are true, the result is true and a 1 is displayed.

A AND $C = D$

The expression, A , is false since its arithmetic value equals zero. The expression, $C = D$, is true. But since AND requires that both expressions be true to return a true result, the result is false and a 0 is displayed.

A OR B

The arithmetic value of A is zero (false) while the arithmetic value of B is two (true). Since at least one of the expressions is true, a 1 is displayed.

A OR C—D

Both arithmetic expressions have a value of 0 (false). So a 0 is displayed.

NOT A

Since A is false, NOT A is true and a 1 is displayed.

NOT B OR NOT C

Since the arithmetic values of B and C are both non-zero, they are both true. Therefore, NOT B and NOT C are both false; so a 0 is displayed.

◆◆◆ TOTAL MATHEMATICAL HIERARCHY ◆◆◆

The hierarchy presented below includes the relational and logical operators discussed in the previous section.

Functions	highest precedence
↑	
NOT	
* /	
+ —	
Relational Operators	
AND	
OR	lowest precedence

As mentioned before, for operations at the same level in the hierarchy, the order of execution is from left to right.

All operations enclosed within parentheses are performed first, thus altering the normal order of execution.



◆◆◆◆◆ ADDITIONAL FEATURES ◆◆◆◆◆

In the calculator mode, a few additional features are available.

SIMULTANEOUS CALCULATIONS ◆

It is possible to execute several expressions simultaneously if the expressions are separated either by commas or semicolons.

For instance, if the diameter of a circle is 12 units ($d=12$), both the area ($\pi d^2/4$) and the circumference (πd) can be solved simultaneously by executing:

PI*12↑2/4,PI*12

113.0973355
37.69911184

More than two expressions can be solved simultaneously; however, since only 32 of the allowable 80 characters can be displayed at once, it may be necessary to hold , the left arrow key, down to view all the results.

The only difference between separating the expressions by commas or semicolons is that semicolons generally cause the results to be 'packed' together while commas cause the results to be 'spread' apart.

PRINT, WRITE ◆

The PRINT statement and the WRITE statement are two important program statements.[†] But they can also be used in the calculator mode, to have the results of calculations printed.

Execute the following example:

PRINT 222*11, 528*8

The printout will be:

2442

4224

An advantage to using the WRITE statement is that you can select the device you want to output on. The primary printer has select code 15 assigned to it. But if you have a secondary printer, it would have another select code, say, 8. Then either printer could be specified in the WRITE statement as follows:

WRITE (15,*) 222*11, 528*8

or

WRITE (8,*) 222*11, 528*8

[†] See page 3-4 and 3-21.

Chapter 3

PROGRAMMING & PROGRAMMING STATEMENTS

The programming language, BASIC, is used in the Model 30. In this chapter, the BASIC statements are individually discussed.

The following information is for the experienced BASIC user:

- These statements can be used in the same way to which you are accustomed:

LET	REM	DEF FN	IF
PRINT	STOP	DIM	FOR .. NEXT
INPUT	END	COM	READ .. DATA
GOTO			GOSUB .. RETURN

In some cases, these statements have additional features and minor variations from other BASIC languages. But, essentially, they can be used just as you would expect.

- These statements, available on the Model 30, are not common to many BASIC languages:

'implied'LET	WAIT	STANDARD	GOTO & GOSUB with OF
DISP	RAD	FIXED N	Multiple-Line Functions
WRITE	DEG	FLOAT N	Programmable Tape Commands
FORMAT	GRAD		

- These statements have additional features, not common in many BASIC languages:

STOP	DIM	READ .. DATA with RESTORE
END	COM	

Before discussing each statement, a quick introduction to writing and running a program will be presented:

◆◆◆◆◆ PROGRAM WRITING ◆◆◆◆◆

A program is a set of instructions organized to accomplish certain tasks. It is organized by lines (statements) with each statement preceded by a unique line number.

Line numbers must appear in the program in ascending order for 'bookkeeping' purposes. However, in the Model 30, you can type program lines in any order because lines are automatically sorted as they are entered. Line numbers 1 through 9999 are allowed.

Program lines can be a maximum of 80 characters in length. In general, any spacing between characters that you use is totally arbitrary. For the calculator inserts appropriate spacing into each line that is entered into memory to make the line easily readable upon review. Only in quote fields and REM statements (discussed later), will the spacing necessarily remain exactly as it was input.

PROGRAM WRITING

(continued)


After each line is written, it is entered into calculator memory when the END OF LINE key is pressed.

Normal program execution proceeds from the lowest-numbered line to the highest-numbered line. However, the order of execution can be altered by some of the statements discussed later.

Flowcharting techniques are often valuable aids to program writing. They are discussed at the end of this chapter where an example program is flowcharted.

PROGRAM EXECUTION

If a program has been correctly keyed in and is the lowest-numbered program in memory, it can be executed by pressing:



If the program is operating properly, it will perform the required tasks and then halt. However, you can halt a program that is running if you press:



However, if the program is waiting at an INPUT statement (discussed on page 3-8), press – STOP EXECUTE – instead.

In Chapter 4, all the programming related commands are discussed.

The rest of this chapter discusses each BASIC statement.

At the end of this chapter, the syntax requirements of all the BASIC statements are presented. These syntaxes are intended primarily for the advanced programmer.

◆◆◆◆◆ ASSIGNMENT ◆◆◆◆◆

In many BASIC languages, this statement is called the LET statement. But in the Model 30, the mnemonic, LET, is optional; so it is referred to simply as an assignment or 'implied' LET statement.

This statement can assign a value to both simple and array variables.† The value assigned can be another variable, a constant, or an expression.

An equals sign must be used to separate the variable (to the left of the equals sign) from its assigned value (to the right of the equals sign).

— Examples —

```

15 G=32.172
25 T=2
35 D=G*T↑2
45 X=Y=Z=0
55 X=X+1
65 U[2]=1
75 A=G
85 LET A=G

```

Lines 15 & 25: The simple variables, G and T, are assigned constant values.

Line 35: The expression, $G \cdot T^2$, determines the value of D. The variables, G and T, must have assigned values for the statement to be executed.

Line 45: In one statement several variables can be assigned the same value. This is a useful technique for initializing variables in the beginning of a program.

Line 55: The variable, X, is set equal to its old value plus 1. This type of statement can function as a 'counter' in a program to determine how many times certain operations are performed.

Line 65: The array variable, U(2), is assigned the value of 1. Since the array variable is less than U(11), it need not be dimensioned (see page 3-36 for dimensioning rules).

Lines 75 & 85: The variable, A, is assigned the value of the variable, G. Both statements are equivalent. The word, LET, is optional and can be used in any of the statements discussed.

† If an array variable is used, it must be properly dimensioned; see page 3-36. When array variables are input, parentheses are used, as in A(3). However, these parentheses are converted to brackets as in A[3] when the line is entered into memory.

PRINT

The PRINT statement can cause various outputs on the printer:

- Text can be printed in any form you want.
- The values of variables, expressions, and constants can be printed.
- Printer lines can be skipped to separate outputs.

Any text that is to be printed must be enclosed by quotation marks; e.g., "ABCDE". The information within the quotation marks is often referred to as a quote field.

Several variables, expressions, and constants can be included in the same PRINT statement as long as they are separated by commas or semicolons. The difference between commas and semicolons is shown in the examples.

Text can also appear in a PRINT statement with variables, expressions, and constants. Aside from the quotation marks, no additional punctuation is necessary when separating text from other information. If neither the comma nor the semicolon is used, the semicolon is assumed.

Examples

```

13 X=3
15 Y=4
17 PRINT "X IS EQUAL TO";X
27 PRINT
37 PRINT X"SQUARED ="X^2;
47 PRINT Y"SQUARED ="Y^2
57 PRINT 1,2,X,Y,5
67 PRINT 1;2;X;Y;5
77 PRINT "THE SQUARE ROOT OF"X"SQUARED
    PLUS"Y"SQUARED EQUALS"SQR(X^2+Y^2)

```

Lines 13 & 15: Variables must have assigned values before being used in a PRINT statement.

Line 17: The quote field is printed exactly as seen. Spaces are not ignored in quote fields as they are in other places. The semicolon between the quote field and the variable, X, is not needed since a semicolon would have been assumed anyway. The variable, X, must have an assigned value or an error occurs when the program is run. With X=3 when the program is run, the printout is:

```

X IS EQUAL TO 3

```

Line 27: This statement tells the printer to skip a line before doing any more printouts. Additional printouts can then begin on the following line.

Lines 37 & 47: A variable, a quote field, and an expression are all designated in each of these PRINT statements. Ending the first of two PRINT statements with a semicolon (as in line 37) causes both printouts to appear on the same line. Here is the printout:

```

3 SQUARED = 9 4 SQUARED = 16

```

A comma could be used instead of the semicolon. But then the printout would be:

```
3    SQUARED = 9, 4    SQUARED = 16
```

Without any punctuation at the end of line 37, the printout would be:

```
3    SQUARED = 9
4    SQUARED = 16
```

Lines 57 & 67: Both constants and variables are printed. The only difference between the two statements is that in line 57 the different items are separated by commas, whereas in line 67 they are separated by semicolons. Here are the two printouts:

```
1    2    3    4    5    3    4    5
1    2    3    4    5    3    4    5
```

When only commas are used (as in line 57), successive printout fields are 15 character spaces apart and as many as five values can always be printed on the same line.

However, when semicolons are used, as in line 67, the values are 'packed' together in the printout. As many as 12 values can be output on the same line (with a field width of 6 character spaces per value) if semicolons are used. But if any value requires more than 4 character spaces (remember, one space is always allocated to the sign), the number of available fields per line is reduced.

Line 77: A long line of text is combined with variables and an expression. The printout is:

```
THE SQUARE ROOT OF 3    SQUARED PLUS 4    SQUARED EQUALS 5
```

The maximum printout per line using the PRINT statement is 72 characters.

Each value output by a PRINT statement is left justified within its respective field (with the left-most character space reserved for the sign).

The same rules that apply to outputs of keyboard calculations if the standard format is used (see page 2-1) also apply to outputs from the PRINT statement.

If your printer has a lower-case character set:

Lower-case characters can be output as text within a quote field if they are keyed in with the SHIFT key held down. Text in WRITE and FORMAT statements (discussed beginning on page 3-21) performs in the same way.

The PRINT statement can only access the printer with select code 15. Be certain that your primary printer is set at this select code. (Most printers are shipped to the customer with select code 15 set.)


DISP

The DISP (Display) statement operates like a PRINT statement except that the outputs appear on the display rather than on the printer.

Three advantages of using the DISP statement are:

- If you don't have a printer, you can still run programs.
- In many programming applications, various operations are performed over and over; in these cases, the DISP statement is a good tool for viewing the changing values of variables — without having to use printer paper and by taking less time than it takes to print the information.
- It's extremely useful in labeling INPUT statements (see page 3-8).

Two advantages of using the PRINT statement are:

- Permanent records of the outputs can be obtained.
- For output lines greater than 32 characters in length, not all the information can appear on the display at the same time, whereas the same information can appear on one printed line. (The DISP statement could still be used, however, if the program ends with the display still visible; then , the left arrow key, could be held down to view the end of the display.)

Examples

```

10 B=5
20 DISP "THE VALUE OF B IS" B
30 DISP B+2-3
40 DISP -1111,2222;3333

```

Lines 29, 39, & 49: These statements merely show that the same operations that are allowed in a PRINT statement are also allowed in a DISP statement. The spacing between fields would be the same with either PRINT or DISP. Here are the three displays:

THE VALUE OF B IS 5

22

1 1 1 1

2222

3333

NOTE

These lines are not meant to be run as one program. If they were, lines 29 and 39 would appear on the display for just an instant. If, in a program, you wish to have two or more successive displays, the WAIT statement (see page 3-17) can be used to prolong each display.

If the last visible output in a program results from a DISP statement, the display remains even after the program is completed.

◆◆◆◆◆ STOP, END ◆◆◆◆◆

Either the STOP or END statement can be used to terminate program execution. The statements can be located in any portion of the program.

The only difference between the two statements is as follows:

- When STOP is encountered, the program halts and the current position of the program line counter† is retained.
- When END is encountered, the program halts and the program line counter reverts to the lowest-numbered statement in memory.

The CONT (Continue) key is discussed on page 4-4. When the keys — CONT EXECUTE — are pressed, the calculator will begin execution at the position of the program line counter. So if a STOP statement is encountered, the program halts. The values of variables can be checked. Then the program can be continued, as though it had never been halted, by pressing: CONT EXECUTE.

Examples

```
10 P=12
20 DISP P
30 STOP


  (press: CONT EXECUTE)

40 DISP P+2
50 END
```



STOP, END

Lines 10 through 50: If this program is run, lines 10 through 30 are executed; the program halts after the STOP statement with the program line counter positioned at line 40. If the keys — CONT EXECUTE — are then pressed, lines 40 and 50 are executed. The program halts after the END statement with the program line counter repositioned at line 10.

If line 30, in the previous example, had been an END statement, line 40 still could have been accessed by pressing:



But to have the program halt during, say, a FOR ... NEXT loop (see page 3-12) and then to be able to continue as though it had never been halted, the STOP statement must be used.

The two keys,  and , cannot be used as program statements.

† The 'program line counter' is an internal device used by the calculator to determine the order of program execution.

◆◆◆◆◆ INPUT ◆◆◆◆◆


The INPUT statement allows variables to be assigned values from the keyboard during program execution.

When the INPUT statement is accessed, a '?' appears on the display. A value can then be input for each of the variables designated in the INPUT statement. For instance, in the statement:


```
10 INPUT A,B,C2,D(3)
```

One value must be assigned to each of the four variables.

Values can be assigned individually or in groups. For instance, the values, 1, 2, 3, and 4, can be assigned as:



or as:



In the first case, the '?' will reappear on the display after each input until all four values are input.

In the second case, all four values are input together. The values can be separated either by commas or by semicolons.

In both cases the values, 1, 2, 3, and 4, are assigned to A, B, C2, and D(3), respectively.

Examples

```
12 INPUT D,D1,D2
22 INPUT D(1),D(2)
```

```
32 DISP "R EQUALS";
42 INPUT R
```

Line 12: The simple variables, D, D1, and D2, are to be assigned values. When more than one variable is designated in an INPUT statement, the variables must be separated by commas.

Line 22: The array variables, D(1) and D(2), are to be assigned values. Since the array variables are less than D(11), they need not be dimensioned (see dimensioning rules on page 3-36).

Lines 32 & 42: By ending line 32 with a semicolon, the text, R EQUALS, will be displayed together with the next display in the program, which is the '?' from line 42. So the display will be:

R EQUALS?

† Either the EXECUTE or the END OF LINE key can be pressed to assign values to variables in the INPUT statement.

Then the variable, R, in line 42 can be assigned a value.

When a program encounters an INPUT statement, a '?' appears on the display and the program waits for values to be keyed in. If you prefer to terminate the program at this point, press the keys: STOP EXECUTE.



IF

The IF statement contains an expression and another line number. First, the expression is logically evaluated. If it is evaluated as 'true', the program continues execution at the specified line number. But if the expression is evaluated as 'false', the program continues execution in its normal sequence with the statement following IF. (Logical evaluation is discussed in Chapter 2, beginning on page 2-19.)

Examples

```

1 INPUT X,Y

22 IF X=3 THEN 142
32 IF INT(X)=3 THEN 222
42 STOP
:
:
313 IF Y<X^2 THEN 333
323 IF Y THEN 363
333 STOP
:
:
404 IF X AND Y THEN 424
414 STOP
424 PRINT X,Y
434 IF X+Y <= 10 THEN 464
444 DISP Y-X
454 STOP
464 DISP X+Y
474 STOP

```

Line 1: For all of these examples, let's assume that X=3.01 and Y=23.

Lines 22 through 42: The IF statement in line 22 is evaluated as 'false' since 3.01 is not equal to 3. So the following statement, line 32, is accessed. This IF statement is then evaluated. Since the integer value of 3.01 equals 3, the statement is evaluated as 'true'. So the program continues execution at line 222.

Lines 313 through 333: Since Y is greater than X^2 , the IF statement in line 313 is evaluated as 'false'. So instead of accessing line 333, the program continues execution in its normal sequence with line 323. Line 323 is logically evaluated as 'true' since Y has a non-zero value. So the program continues execution at line 363.

Lines 404 through 474: Since both X and Y have non-zero values, line 404 is evaluated as 'true' and program execution is transferred to line 424 where the values for X and Y are printed. Line 434 checks to see if X+Y is less than or equal to 10. The evaluation is 'false' so program execution continues at line 444. The value of Y-X is computed and displayed. Then the program stops at line 454.

Avoid unnecessary punctuation; for instance:

```
22 IF X=3, THEN 142
```

The comma is not allowed here. If it's inadvertently keyed in, ERROR 24 occurs.



GOTO

The GOTO statement is used to alter the normal sequence of program execution. The program continues execution at the line number specified in the GOTO statement.

Examples

#1

```

11 A=1
21 IF A↑2<1000 THEN 51
31 DISP A↑A↑2
41 STOP
51 A=A+1
61 GOTO 21

```

#2

```

105 Z=0
110 X=1
115 Z=X+Z
120 DISP X,Z/X
125 X=X+1
130 GOTO 115

```

Example No. 1: This program 'loops' (repeats part of itself) several times until the IF statement, line 21, is no longer true; that is, until $A↑2 \geq 1000$. If $A↑2 < 1000$, the variable, A, is incremented by 1 in line 51. Then the GOTO statement, line 61, is executed causing the program to loop back to line 21.

Example No. 2: The GOTO statement in this program causes the program to loop between lines 115 and 130. This is a 'closed loop'; that is, there is no program statement in the loop that can cause the loop to be exited. So to halt this program, press the STOP key.

Line numbers in GOTO statements must be constants; statements like, 15 GOTO P, are not allowed. Furthermore, the line number specified must be in memory when the program is run or else an error will occur.

 **REM** 

The REM (Remark) statement is merely a note to the programmer and is not executed by the program. However, the statement does appear on a program listing.

Any series of characters can follow REM, the only restriction being the maximum line length of 80 characters.

Examples

```
13 REM    YOU CAN SAY  
23 REM--ANYTHING YOU WANT  
33 REM:TNAW UOY YAW YNA  
43 REM..IN A $<#=@* REM STATEMENT
```

 REM

◆◆◆◆◆ FOR ... NEXT ◆◆◆◆◆

The FOR and NEXT statements allow for the controlled repetition of a group of statements within a program.

The FOR and NEXT statements form a loop with the statements between them in a program. The FOR statement defines the number of times the loop is to be performed. For example:

```

10 FOR I=1 TO 5
  :
  :
100 NEXT I
110
  :
  :
200 END

```

This FOR...NEXT loop would be executed five times: when I=1, 2, 3, 4, and 5. Each time the NEXT statement is executed, the value of I is incremented by one. If I is less than or equal to 5, the loop is executed again. But when the value of I passes the final value, that is, when I=6, the statement following the NEXT statement (in this case, line 110) is accessed.

The advantages of using FOR...NEXT rather than IF can be shown in the following simple example where the numbers 1 through 100 are to be displayed in succession:

Using IF

```

10 N=1
20 IF N>100 THEN 60
30 DISP N
40 N=N+1
50 GOTO 20
60 END

```

Using FOR...NEXT

```

10 FOR N=1 TO 100
20 DISP N
30 NEXT N
40 END

```

In the example the program is easier to key in, takes up considerably less calculator memory, and executes much faster if the FOR...NEXT loop is used.

Examples

#1

```

11 Z=0
21 FOR P=90 TO 100
31 Z=Z+P
41 NEXT P
51 PRINT "THE TOTAL IS"Z
61 END

```

#2

```

1 Z=0
11 INPUT M,N
21 FOR P=M TO N
31 Z=Z+P
41 NEXT P
51 PRINT "THE TOTAL IS"Z
61 END

```

#3

```

19 FOR A=1 TO 12
29 PRINT A;
39 NEXT A
49 PRINT A
59 END

```

#4

```

9 Z=0
19 INPUT V
29 FOR A=1 TO V
39 Z=Z+A
49 NEXT A

```

or { 59 PRINT "THE AVERAGE IS"Z/(A-1)
59 PRINT "THE AVERAGE IS"Z/V
69 END

Example No. 1: The initial value of the variable assigned in the FOR...NEXT loop need not be 1; in this case, P is assigned the value, 90. This example takes the summation of the integers, 90 through 100, and prints the total.

Example No. 2: This example is like example no. 1, except that the user can vary the numbers to be totaled. The variable, P, in line 21 is assigned the variable value, M, for its first value and is assigned the variable value, N, for its final value. M and N are both assigned values in the INPUT statement, line 11.

- If M=3 and N=5, the summation of 3, 4, and 5 would be taken.
- If M=3.1, and N=5.1, the summation of 3.1, 4.1, and 5.1 would be taken.
- If M=3.1 and N=5, the summation of 3.1 and 4.1 would be taken.

In each case the value of P increments by 1 after each loop. In the last case, the loop would be performed only twice, when P=3.1 and 4.1; for when P increments to 5.1, the value of N, which is 5, is exceeded and line 51, which follows the NEXT statement, is accessed.

By the way, if M is set equal to a value greater than N, the loop is immediately bypassed and the total printed in line 51 would be \emptyset .

Example No. 3: An aspect of the FOR...NEXT loop that is often overlooked is emphasized in this example. After each loop is performed, the NEXT statement, line 39, increments the value of A by 1. It then compares the incremented value to the final value indicated in line 19. If this incremented value is less than or equal to the final value, another loop is performed starting at line 29; but if the incremented value is greater than the final value, (that is when A=13) the loop is no longer accessed and line 49 is executed. In this line the value of A is printed. Although the final loop is performed when A=12, the last incremented value for A is 13 and the calculator memory retains this as the value of A. So the total printout would be:

```

1      2      3      4      5      6      7      8      9      10     11     12
13

```

In all cases, the final value retained for the variable in the FOR...NEXT loop is greater than the final value in the FOR statement. In some programs, this could be a minor problem. The next example shows how to compensate for it.

Example No. 4: This program calculates the average of the inputs (either version of line number 59 could be used).

- In the first case, the summation (Z) is divided by the number of inputs (A-1). A-1 is used to compensate for the final incremented value of A, as discussed in the previous example.
- In the second case, Z is divided by V to get the average. Since V retains its initial value, no compensation factor is needed.

(continued)

FOR ... NEXT

(continued)

#5

```

1 FOR G=1 TO 100
2 IF G+2 >= 500 THEN 5
3 NEXT G
4 STOP
5 PRINT G;G+2
6 END

```

#6

```

12 FOR I=1 TO 4
22 A[I]=I+2
32 PRINT A[I];
42 NEXT I
52 PRINT
62 PRINT A[1];A[2];A[3];A[4]
72 END

```

Example No. 5: This program shows that a FOR...NEXT loop can be exited before the final variable value is reached. When this program halts, the printout is:

```

23      529

```

Example No. 6: This program shows how the FOR...NEXT loop can be used to assign values to arrays. In this example, the array variables, A(1) through A(4) are assigned values. The printout is:

```

1      4      9      16
1      4      9      16

```

FOR...NEXT loops can be nested; that is, they can be located inside one another. However, one loop cannot overlap another. For instance:

Correct

```

10 FOR E=1 TO 15
20 FOR Z=3 TO 12
:
:
:
80 NEXT Z
90 NEXT E

```

Incorrect

```

10 FOR E=1 TO 15
20 FOR Z=3 TO 12
:
:
:
80 NEXT E
90 NEXT Z

```

Notes:

- Entering a FOR...NEXT loop at any place other than the FOR statement (with statements like GOTO or IF), can cause unpredictable results and should, therefore, be avoided.
- Each FOR statement can have only one associated NEXT statement.

An additional feature of the FOR and NEXT statements is discussed next.

◆◆◆◆◆ FOR . . . NEXT with STEP ◆◆◆◆◆

It's not necessary that the variable in the FOR . . . NEXT loop be incremented by 1 each time the loop is executed. For instance:

```
10 FOR I=0 TO 12 STEP 3
  :
  :
50 NEXT I
```

By adding STEP to the FOR statement, the variable will be incremented by the number following STEP (in this case, 3). So this loop will be executed five times: when I=0, 3, 6, 9, and 12. But if the program read:

```
10 FOR I=0 TO 11 STEP 3
  :
  :
50 NEXT I
```

The loop would be executed only four times: when I=0, 3, 6, and 9. As soon as the incremented value passes the final value, the loop is exited.

Examples

```
#1
or { 12 FOR X=1 TO 4
      12 FOR X=1 TO 4 STEP 1
      22 PRINT X^2-X;
      32 NEXT X
      42 END
```


Example No. 1: Either version of line 12 could be used with identical results. In either case, when the program loops, the value of X is incremented by 1. Therefore, if you want the variable to increment by 1, it is unnecessary to use the STEP feature.

```
#2
15 FOR C=1 TO 6 STEP 2
25 DISP C;
35 NEXT C
45 END
```

Example No. 2: This loop is executed three times: when C=1, 3, and 5. The final display is:

1	3	5
---	---	---

(continued)



FOR . . . NEXT with STEP

(continued)

#3

```
17 FOR T=4 TO -8 STEP -4
27 PRINT T;T+2
37 NEXT T
47 END
```

Example No. 3: This program shows that FOR . . . NEXT loops can be incremented by negative values, in this case, -4 . This loop is executed four times: when $T=4$, 0 , -4 , and -8 . The printout is:

```
4      16
0      0
-4     16
-8     64
```

#4

```
4 DEG
14 FOR S=-30 TO -90 STEP -15
24 PRINT SIN(S)
34 NEXT S
44 END
```

Example No. 4: Line 4 allows angles to be calculated in degrees. The FOR . . . NEXT loop is incremented negatively as it was in example No. 3. The loop is incremented five times: when $S=-30$, -45 , -60 , -75 , and -90 . The printout is:

```
-0.5000000000
-0.707106781
-0.866025404
-0.965925826
-1
```

The step size need not be an integer value; e.g., STEP 2.5 is allowed.

Furthermore, the initial variable value, the final variable value, and the step size can all be expressions; e.g.,

```
10 FOR I=A/6 TO A/2 STEP 0.1*A
```

WAIT

The WAIT statement introduces a timed delay between two program statements. It's particularly useful for delaying consecutive printouts or prolonging displays.

The WAIT statement causes the program to pause the specified number of milliseconds (1000 milliseconds = 1 second). The delay can be set to vary between approximately 0 and 33 seconds.

Examples



#1

```
10 Y=0
20 X=2↑Y
30 DISP "2 ↑Y"='X
40 WAIT 3000
50 Y=Y+1
60 GOTO 20
```

#2

```
10 DISP "DON'T TOUCH ME!"
20 WAIT 32000
30 DISP "OUCH !!!!!"
40 WAIT 4000
50 GOTO 10
```

Example No. 1: In this program, the value of Y is incremented by 1; and for each value of Y, 2^Y is calculated and displayed. By putting in the statement, WAIT 3000, about a three second delay occurs between consecutive displays.

Example No. 2: The quote field in line 10 is displayed for about 32 seconds, and then the quote field in line 30 is displayed for about 4 seconds, etc. The WAIT statement has one additional feature. Most of the Model 30 keys, if pressed, will cause the current WAIT statement to be terminated and program execution to be resumed. (Of course, if the STOP key is pressed, the program halts.) So if the calculator is displaying:

DON'T TOUCH ME!

and, say, an alphabetic key is pressed, the calculator would immediately display:

OUCH !!!!!

The maximum delay that can be specified in a WAIT statement is about 33 seconds. Any WAIT statement with a number greater than 32767 will wait the maximum amount of time.

The specified delay in a WAIT statement can be a constant, a variable, or an expression.

◆◆◆◆◆ READ . . . DATA ◆◆◆◆◆

The READ and DATA statements combine to assign values to variables. The READ statement determines the variable (for instance, 10 READ Y), while the DATA statement determines the value to be assigned to the variable (for instance, 90 DATA 12.4).

More than one variable can be specified in a READ statement (for instance, 10 READ X,Y,Z) and several values can be specified in a DATA statement (for instance, 90 DATA 5.1, 7.6, 9.3, 4, 16, 9.2).

The calculator uses an internal mechanism, called a 'pointer', to locate the data element that is to be read. The leftmost element of the lowest-numbered DATA statement is read first. After this element is read, the data pointer repositions itself one element to the right, and continues to do so each time another data element is read.

After the last element in a DATA statement is read, the data pointer locates the next higher-numbered DATA statement and repositions itself at the first element in that statement. But if there are no higher-numbered DATA statements, the data pointer remains at the end of the previous DATA statement; and any effort to read additional data will result in an error message.

The location of the DATA statement in a program is immaterial unless there is more than one DATA statement; if so, just be sure they are in the order you want.

Examples

<pre>#1 10 READ A,B,C : : 40 READ A1,B1 : : 70 READ P : : 200 DATA 4,5,6,7,31,2.69,0</pre>	<pre>#3 7 DATA 3,4,8,15,7,24,47,1104 17 FOR J=1 TO 4 27 READ X,Y 37 PRINT X;Y;SQR(X+2+Y+2) 47 NEXT J 57 END</pre>
<pre>#2 12 FOR I=1 TO 5 22 READ X 32 PRINT X"SQUARED ="X+2 42 NEXT I 52 DATA 24,8.3,17,19,3.2 62 END</pre>	<pre>#4 18 READ N 28 FOR P=1 TO N 38 READ D,D1 48 PRINT D+2-D1 58 NEXT P 68 DATA 3 78 DATA 9,1,8,4,7,9 88 END</pre>

Example No. 1: This example shows that several READ statements can apply to the same DATA statement. The data pointer just moves to the right each time another data element is read. The first variable is assigned the first data value, the second variable is assigned the second value, and so on.



Data can appear in more than one DATA statement. Thus, the following representations would all be equivalent:

```
200 DATA 4,5,6,7.31,2.69,0
```

or

```
200 DATA 4,5,6
201 DATA 7.31,2.69
202 DATA 0
```

or

```
200 DATA 4,5
201 DATA 6,7.31,2.69,0
```

Example No. 2: READ statements are often used in FOR...NEXT loops. Each time this loop is executed, a new value for X is read and a new line is printed. The printout is:

```
24    SQUARED = 576
8.3   SQUARED = 68.89
17    SQUARED = 289
19    SQUARED = 361
3.2   SQUARED = 10.24
```

Example No. 3: The DATA statement can appear anywhere in the program. In this case, it is the first statement. In this program, the FOR...NEXT loop is executed four times, and each time, new values are assigned to X and Y. The printout is:

```
3      4      5
8      15     17
7      24     25
47     1104    1105
```

Example No. 4: In this program one READ statement is outside the FOR...NEXT loop (thus being executed only once) and one is inside the loop (thus being executed three times). The printout is:

```
80
60
40
```

The DATA statement is accessed only by a READ statement; otherwise, the program ignores it.

Once the READ statement variables are assigned values from a DATA statement, the statement following READ is executed.

◆◆◆ READ . . . DATA with RESTORE ◆◆◆

Data elements can be read more than once if the RESTORE statement is used.

There are two variations of the RESTORE statement; for instance:

80 RESTORE or 90 RESTORE 150

- If the first RESTORE statement, 80, is encountered during program execution, the data pointer reverts to the first data element in the lowest-numbered DATA statement.
- If the second RESTORE statement, 90, is encountered during program execution, the data pointer reverts to the first data element in the DATA statement specified (in this case, line 150).

————— Examples —————

```
#1
10 FOR I=1 TO 5
20 READ A
30 PRINT A"SQUARED ="A^2
40 NEXT I
50 RESTORE
60 PRINT
70 FOR J=1 TO 3
80 READ B
90 PRINT B"CUBED ="B^3
100 NEXT J
110 DATA 4,9,12,8,27
120 END
```

```
#2
10 READ N
20 FOR I=1 TO N
30 READ A
40 PRINT A"SQUARED ="A^2
50 NEXT I
60 RESTORE 130
70 PRINT
80 FOR J=1 TO 3
90 READ B
100 PRINT B"CUBED ="B^3
110 NEXT J
120 DATA 5
130 DATA 4,9,12,8,27
140 END
```

Example No. 1: In this program, immediately before the RESTORE statement is accessed, the data pointer is located after the last data element in line 110. The RESTORE statement resets the data pointer to the first element in line 110 so that the data can be reread.

Example No. 2: In this program, there are two DATA statements (line 120 and line 130). Immediately before the RESTORE statement is accessed, the data pointer is located after the last data element in line 130. This RESTORE statement directs the data pointer to the first element in line 130. If the line number, 130, had not been specified, the data pointer would have been reset to line 120.

In both examples, the printout is:

```
4      SQUARED = 16
9      SQUARED = 81
12     SQUARED = 144
8      SQUARED = 64
27     SQUARED = 729
```

```
4      CUBED = 64
9      CUBED = 729
12     CUBED = 1728
```



WRITE

This section shows how the WRITE statement can be used like a PRINT statement although it is generally used with the FORMAT statement (discussed on page 3-22).

When used without the FORMAT statement, the WRITE statement works like a PRINT statement with one major exception: the desired output device can be specified in a WRITE statement whereas the PRINT statement always assumes the primary printer (select code 15).

The WRITE statement specifies the output device by select code. The primary printer is always select code 15. If you have a secondary printer, it might be set at select code 8. Either of these select codes (or the select code of another compatible output device) could then be specified.

To write the constants, 1, 2, 3, on the primary printer, the statement could be:

```
10 WRITE (15,*)1,2,3
```

If this statement is executed, the printout is identical to the following PRINT statement:

```
10 PRINT 1,2,3
```

Within the parentheses, the select code† is specified, followed by the '*'. The '*' indicates that the WRITE statement is being used without a corresponding FORMAT statement and that all the rules of the PRINT statement are to be followed when outputting the constants, expressions, etc.

WRITE

Examples

<pre>#1 10 X=4 20 WRITE (8,*)X"SQUARED ="X^2 30 END</pre>	<pre>#2 12 INPUT S,Z 22 IF S#8 AND S#15 THEN 12 32 WRITE (S,*)Z"SQUARED ="Z^2 42 END</pre>
-----------------------------------------------------------	--------------------------------------------------------------------------------------------

Example No. 1: If a secondary printer with select code 8 is connected to the calculator, the printout would be:

```
4      SQUARED = 16
```

Example No. 2: In this program, if both the primary printer (select code 15) and the secondary printer (select code 8) are connected to the calculator, either one can be accessed. The value input for the variable, S, determines the select code. So if 15 is input for S and 6 is input for Z, the printout on the primary printer would be:

```
6      SQUARED = 36
```

† The select code can be a variable.

◆◆◆◆◆◆◆◆◆◆ **FORMAT** ◆◆◆◆◆◆◆◆◆◆

The FORMAT statement gives output specifications to the WRITE statement that references it. The formatting of numbers and the spacing between successive items is easily controlled with the FORMAT and WRITE statements. Also, symbols not available with the PRINT statement can be output by using FORMAT and WRITE.

The WRITE statement references a FORMAT statement as follows:

```
10 WRITE (15,200)A
```

where, in this example, 15 refers to the select code of the output device, and 200 refers to the line number of the corresponding FORMAT statement.

Like the PRINT statement, the WRITE statement can output:

- Text (in a quote field)
- Values for variables
- Values for expressions
- Constants.

Text is output the same in either statement; the information inside the quotation marks is output character for character.

If expressions, variables, and constants are specified in a WRITE statement, their values can be output according to either of the following FORMAT statement specifications:

- Fw.d where F indicates fixed-point format;
 w indicates total field width (in character spaces);
 d indicates the number of digits to the right of the decimal point.
- Ew.d where E indicates exponential format (often called floating-point or scientific notation);
 w indicates total field width (in character spaces);
 d indicates the number of digits to the right of the decimal point.

The other available FORMAT statement specifications are:

- X which indicates a blank character space;
- / which indicates a carriage return—line feed for the printer;
- "text" which indicates a quote field (also allowed in the WRITE statement);
- B which allows symbols that are otherwise not obtainable to be output by the Model 30.

Any combination of the specifications can appear in the same FORMAT statement; but different items must be separated by commas.

Any of the specifications can be duplicated a specific number of times if a repeat factor is specified; for instance:

```
10 FORMAT 2F6.2,4X,F6.2
```

The first fixed-point field would appear twice, followed by four character spaces, and then another fixed-point field.

The FORMAT statement, like the DATA statement, can appear anywhere in the program. It is never executed by the program until it is referenced by a WRITE statement.

Examples

```
12 FORMAT F6.1,F10.2,F2.0
20 WRITE (15,12)7.7,-92.6

33 FORMAT E8.1,E12.2
40 WRITE (15,33)1234,2.6E+95
```



Lines 12 and 20: The three numbers are output according to the three fixed-point formats. The printout is:

† $\Delta\Delta\Delta 7.7 \Delta\Delta\Delta\Delta -92.00\Delta 6$

1
2
3

Fw.d The field widths, w, for the three printouts are 6, 10, and 2, respectively. In the printout, the three field widths have been labeled 1, 2, and 3. In the first two formats, the number of digits to the right of the decimal point is 1 and 2, respectively. In the third case, since d=0, the decimal point is suppressed.

Notice all three printouts are right justified within their respective fields. In each case, there is a space available for the sign (although in 1 and 3, since the sign is '+', the sign is suppressed). Also, in every case (except for d=0), the decimal point takes up one character space. If the field width does not allow for both the sign and the decimal point, the value will not be output (see lines 90 and 99 on the following page).

Lines 33 and 40: The two numbers are output according to the two exponential formats. The printout is:

$\Delta 1.2E+03 \Delta\Delta\Delta\Delta 2.60E+95$

1
2

Ew.d The field widths, w, for the two printouts are 8 and 12, respectively. The number of digits immediately to the right of the decimal point, d, is 1 and 2, respectively.

The 'E' format follows the same general rules as the 'F' format: printouts are right justified; the sign (or assumed sign) and the decimal point take up one character space each. But in 'E' format, the field width must be at least four greater than in 'F' format because the last four digits are needed to indicate the power of 10 to which the number should be raised.

(continued)

† In these examples the 'Δ' will be used to indicate a blank space in the printout.

FORMAT

(continued)

```

55 FORMAT F6.2,E10.2
60 WRITE (15,55)4,97,8,43,6

90 WRITE (15,99)12.2,1.8
99 FORMAT F4.1,E6.0

```

Lines 55 and 60: The 'F' and 'E' formats are both used here. The printout is as follows:

```

△△4.00△△9.70E+01
△△8.00△△4.30E+01
△△6.00

```

After the first two values are printed according to the specified formats, the printer performs a carriage return—line feed (resets itself to the beginning of the next line). Then two more values are printed according to the same two specified formats, etc.

Lines 90 and 99: The WRITE statement is located before the FORMAT statement; it makes no difference to the calculator. For a value of 12.2 to be printed as it appears would require an 'F' format with field width of 5 (to allow for the implied sign). Since the specified field width of 4 is not large enough, the calculator outputs dollar signs, \$\$\$\$, in the entire field to indicate the lack of space. The second value, 1.8, is rounded up to 2 since the second format calls for zero decimal places. (Incidentally, had this specified field width been one less, dollar signs would also have been displayed here.) This printout is:

```

$$$$△2E+00
  1      2

```

Formatting Rules:

- Using Fw.d If $d > 0$, then the minimum field width allowable is $w = d + 3$. If $d = 0$, the minimum field width allowable is $w = 2$. One of the character spaces is always allocated for the sign (although only the minus sign is displayed). Another space is needed for the digit preceding the decimal point. Additional spaces are required if more than one digit precedes the decimal point. For instance, F4.1 is sufficient for the number, 2.6; but F5.1 is needed for the number, 12.6.
- Using Ew.d If $d > 0$, then the minimum field width allowable is $w = d + 7$. If $d = 0$, the minimum allowable field width is $w = 6$. Of course, the field width can be greater to increase the number of blank character spaces.

The following six examples show additional formatting techniques.

#1

```

10 FORMAT F5.0,2X,"TROMBONES"
12 WRITE (15,10)76
14 END

```

#2

```

10 FORMAT F5.0
12 WRITE (15,10)76,"TROMBONES"
14 END

```

#3

```

10 FORMAT F5.0,/, "TROMBONES"
12 WRITE (15,10)76
14 END

```

#4

```

10 FORMAT F5.0,/,
12 WRITE (15,10)76,"TROMBONES"
14 END

```

#5

```
10 FORMAT F5.0," TROMBONES"
12 WRITE (15,10)76," OR FLUTES"
14 END
```

#6

```
10 FORMAT F5.0," TROMBONES",F6.2
12 WRITE (15,10)76," OR FLUTES"
14 END
```

Example No. 1: The number, 76, is printed according to the F5.0 specifications; it is followed by two character spaces (2X) and the word, TROMBONES. The printout is:

```
76  TROMBONES
```

Example No. 2: The number, 76, is again printed according to the F5.0 specifications. The FORMAT statement then checks for additional format specifications. Since nothing follows the F5.0, the printer performs a carriage return—line feed. Then the WRITE statement is checked for additional specifications. Since there is a quote field following the 76, the quote field is output. The printout is:

```
76
TROMBONES
```

Example No. 3: This output is the same as in example no. 2. This time, however, the '/' specifies the carriage return—line feed. As mentioned, the printout is:

```
76
TROMBONES
```

Example No. 4: In this case, the printer performs the carriage return—line feed twice: first when the '/' is accessed; and then because nothing else follows the '/'. The printout is:

```
76

TROMBONES
```

Example No. 5: This example shows that after the value, 76, is output according to the F5.0 specifications, the text in the FORMAT statement is output before the text in the WRITE statement; and since nothing follows the text in the FORMAT statement, a carriage return—line feed is performed before the text in the WRITE statement is output. The printout is:

```
76 TROMBONES
OR FLUTES
```

Example No. 6: This example illustrates a technique that often is useful. Occasionally it would be beneficial to suppress the carriage return—line feed before the WRITE statement is completed. A 'dummy' format specification can be used to accomplish this; that is, an 'F' or 'E' specification in the FORMAT statement without a corresponding value in the WRITE statement. The printout is:

```
76 TROMBONES OR FLUTES
```

(continued)

FORMAT

(continued)

Three more examples are included here: The first example includes all the concepts discussed earlier, and the last two examples show some applications of FORMAT B.

#7

```
10 INPUT X,Y,Z
20 FORMAT "AVERAGE",5X,"MEAN",5X,"MEDIAN",/,F5.1,6X,F5.1,5X,F5.1
30 WRITE (15,20)X,Y,Z
40 END
```

#8

```
10 FORMAT B                               or   10 FORMAT 3B
20 WRITE (15,10)34,91,93                  20 WRITE (15,10)34,91,93
30 END                                    30 END
```

#9

```
10 WRITE (15,20)34,91,93,34
20 FORMAT 11X,"1  2",/,B,"LOOK AT IT'S",B,"ITS",B," SIZE,",B,
                                     "EXCLAIMED MARY!"
30 DISP "WHICH IS CORRECT, 1 OR 2";
40 INPUT X
50 PRINT
60 IF X=2 THEN 90
70 PRINT X"IS THE INCORRECT RESPONSE"
80 STOP
90 PRINT X"IS THE CORRECT RESPONSE"
100 END
```

Example No. 7: Suppose X, Y, and Z were input as 9.9, 10.2, and 10.3, respectively. When the FORMAT statement is accessed, the headers for the three numbers are output with a character spacing of five between words. Then the printer performs a carriage return—line feed and prints the three numbers according to the specified formats. The spacing between the 'F' fields (6X and 5X) is needed so that the numbers will be positioned under the appropriate headings. (Generally it takes a few attempts before the spacing works out correctly.) The printout is:

```
AVERAGE      MEAN      MEDIAN
  9.9         10.2         10.3
```

Example No 8: FORMAT B is used to output symbols not otherwise available on the Model 30. 'B' is indicated in the FORMAT statement and the corresponding number in the WRITE statement is interpreted as a code. (This code is actually the decimal equivalent of an octal number understood by the calculator.) The symbol you will get for each number input is shown in Table F-2, Appendix F. Most of these symbols are already easily accessible on the Model 30 without using FORMAT B; but a few of them cannot be obtained unless FORMAT B is used. For instance, in the first printout:

```
"
[
]
```

Using FORMAT 3B, the printout is:

```
"[ ]
```

None of these symbols can be output without using FORMAT B. Quotation marks (") can be input to represent quote fields but cannot be output within quote fields. As can be seen by this printout, the codes for these symbols are 34, 91, and 93, respectively.

Example No. 9: In this example, practical uses for some of these symbols are shown. Everything in the FORMAT statement is output as usual. When the first 'B' is encountered, the first number in the WRITE statement is taken as the code for the symbol to be output there. When the second 'B' is encountered, the second number is the code, etc.

The printout from the WRITE and FORMAT statements is:

```

      1  2  34 91 93
"LOOK AT IT'S[ITS] SIZE,"EXCLAIMED MARY!"

```

This grammatical question has two choices, 1 or 2. If '2' is keyed in when the INPUT statement is encountered, the final printout is:

```

2      IS THE CORRECT RESPONSE

```

Unlike the PRINT statement, in which the maximum printout per line is 72 characters, with WRITE and FORMAT the maximum printout per line is restricted only by the character length of your printer.

A semicolon or comma at the end of a WRITE statement suppresses the carriage return—line feed if the corresponding FORMAT statement specifications have not been completed.

PRINT with TAB

The TAB command is most often used with the PRINT statement but it can likewise be used in DISP and WRITE† statements. With the TAB command, outputs can be located at a specified character position. Character positions 0 through 71 can be designated. Notice it is the absolute character position that is specified — not the character spacing. If a character position greater than 71 is specified, a carriage return—line feed is output.

The TAB command can also specify a variable character position.

Two reminders:

- If TAB is used in a DISP statement, anything past TAB31 will not be visible on the display.
- TAB is ignored if the character position is already past the specified TAB; for example, 10 PRINT 12, TAB6, 24. Since the punctuation after the 12 is a comma, the value of 12 is automatically contained in a 15 character field. And so, TAB6 is irrelevant.

Examples

```
#1
10 INPUT X,Y,Z
20 PRINT "AVERAGE"TAB20"MEAN"TAB40"MEDIAN"
30 PRINT X,TAB20,Y,TAB40,Z
40 END

#2
10 DEG
20 X=0
30 PRINT TAB(35+25*SINX),X;"DEG"
40 X=X+30
50 GOTO 30
```

Example No. 1: The PRINT statement in line 20 sets up the headers for the variables, X, Y, and Z. The first heading, AVERAGE, starts at character position 0; the heading, MEAN, starts at character position 20; and the heading, MEDIAN, starts at character position 40. Then in line 30, the variables are printed under the three headings. Suppose X, Y, and Z were input as 11.23, 11, and 11.4, respectively. The printout would be:

```
AVERAGE          MEAN          MEDIAN
11.23             11             11.4
```

Example No. 2: In this example, an application of a variable TAB is shown — TAB (35+25*SINX). The TAB origin is at character position 35. The curve for the sine of X fluctuates to either side of the origin — to the right for positive sine values and to the left for negative sine values. (The sine of X is multiplied by a factor of 25 in this

† The WRITE statement will accept the TAB command only when WRITE operates like a PRINT statement; e.g., 10 WRITE (15,*)2, TAB 30, 4.

example to enable the TAB to make larger increments.) This program halts whenever you press the STOP key. The printout is:

```

      0      DEG
      30     DEG
      60     DEG
      90     DEG
     120     DEG
     150     DEG
     180     DEG
     210     DEG
     240     DEG
     270     DEG
     300     DEG
     330     DEG
     360     DEG
     390     DEG
     420     DEG
     450     DEG
     480     DEG
     510     DEG
     540     DEG
     570     DEG
     600     DEG
     630     DEG
     660     DEG
     690     DEG
     720     DEG
     750     DEG
     780     DEG
     810     DEG
     840     DEG
     870     DEG
     900     DEG
     930     DEG
     960     DEG
     990     DEG
    1020     DEG
    1050     DEG
    1080     DEG
    1110     DEG

```

◆◆◆◆◆ GOSUB . . . RETURN ◆◆◆◆◆

The GOSUB statement transfers program execution to the line number specified by GOSUB. Eventually, a RETURN statement is accessed, which transfers program execution to the statement following the previous GOSUB statement.

The GOSUB and RETURN statements eliminate the need to repeat frequently used groups of statements in a program.

Examples

<pre> #1 10 INPUT A : : 60 GOSUB 1000 70 PRINT A : : 200 GOSUB 1000 210 PRINT A,N : : 990 STOP 1000 N=N+1 : : 1200 RETURN 1210 END </pre>	<pre> #2 10 INPUT A,N : : 60 GOSUB 1000 70 PRINT A,N : : 900 STOP : : 1000 IF A*N<150 THEN 1020 1010 GOSUB 2000 1020 A=A+5 : : 1200 RETURN : : 1990 STOP 2000 A=(A*N)/5 : : 2200 RETURN 2210 END </pre>
-------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

The order of execution by line number in the two examples is:

Example #1

```

10-60
1000-1200
70-200
1000-1200
210-990

```


Example #2

when $A*N < 150$	when $A*N \geq 150$
10-60	10-60
1000	1000-1010
1020-1200	2000-2200
70-900	1020-1200
	70-900

In both examples, before each subroutine (lines 1000-1200 and lines 2000-2200) there is a STOP statement. A statement like this is a good precautionary measure to ensure that a subroutine is not inadvertently accessed; if it is, the error — improper RETURN — will probably occur.

Example 2 (when $A*N \geq 150$) shows that subroutines can be nested; that is, a second subroutine can be executed before the RETURN in the first subroutine is accessed.

Each nested subroutine requires one additional word of calculator memory during program execution. Therefore, the number of nested subroutines is restricted only by the size of the calculator memory.



◆◆◆◆◆ GOTO & GOSUB with OF ◆◆◆◆◆

The GOTO and GOSUB statements were discussed earlier (pages 3-10 and 3-30, respectively). In both statements the program reverts to the line number specified. But, in this section, two additional features of the statements, called the computed GOTO and the computed GOSUB, are discussed.

Both statements contain an expression followed by the word 'OF'; to complete the statement, one or more line numbers are specified.

The expression is evaluated and its rounded integer value is determined. This integer value then acts as a pointer to determine which line number, from those specified, is to be accessed. The first line number specified corresponds to an integer value of 1, the second line number corresponds to an integer value of 2, etc.

If the rounded integer value of the expression is either less than 1 or greater than the number of specified statements, then the statement following the computed GOTO or GOSUB statement is accessed. The form is always the same as seen in the following examples.

—Examples—

```
#1
10 INPUT X
20 GOTO X OF 300,330,360,390
30
.
.
500 END

#2
10 INPUT X,Y
20 GOSUB ABS(X-Y) OF 200,300,400
30
.
.
110 GOTO 10
.
.
400 PRINT X^2+Y^2
.
.
500 RETURN
```

Example No. 1: In this example, the expression to be evaluated is merely the variable, X. Values of X equal to 1, 2, 3, or 4 correspond to the four line numbers listed. If X=2, the second line number (line 330) is accessed. If X=2.5, the value of X is rounded to 3 in the computed GOTO statement, and the third line number (line 360) is accessed. (Decimal values of .5 and greater are always rounded to the next higher integer value.) If the rounded integer value of X is either less than 1 or greater than 4, the statement following the computed GOTO statement (line 30) is accessed.

Example No. 2: This example uses a computed GOSUB statement. The expression to be evaluated is: ABS(X-Y). Since three statements are specified, if the integer value of the expression is 1, 2, or 3, the first, second, or third subroutine is accessed; otherwise, the following statement, line 30, is accessed.

DEF FN

The DEF FN (Define Function) statement can define a function in one line (for single-line functions) or in several lines (for multiple-line functions). Single-line functions will be discussed first.

SINGLE-LINE FUNCTIONS

If an algebraic expression has to be evaluated several times in a program, it may be convenient to define the expression as a function.

A maximum of 26 defined functions, FNA through FNZ, are possible in a program. Besides a function name, a letter (A through Z), the function also needs a simple variable (referred to as a 'local'[†] variable). If the local variable is also included in the expression, the function can easily be evaluated for different values of the local variable.

Examples

<p>#1</p> <pre>10 DEF FNB(X)=X^2+X 20 PRINT FNB4,FNB5,FNB6 30 END</pre> <p>#2</p> <pre>10 INPUT Y 20 PRINT FNZ(Y)-5 30 END 40 DEF FNZ(Y)=Y^2-Y</pre>	<p>#3</p> <pre>10 INPUT X 20 DEF FNA(X)=SQR(X^2+Y^2) 30 FOR I=1 TO 5 40 INPUT Y 50 PRINT FNAX 60 NEXT I 70 END</pre>
------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------

Example No. 1: The function, B, is defined with X as its local variable. Three values of the function are evaluated and printed: for X=4, 5, and 6. In the example, X is defined only as a local variable and is undefined as a global variable (see footnote). The printout is:

20 30 42

Example No. 2: The function, Z, is defined with Y as its local variable. (Notice, it doesn't matter where the DEF FN statement is located in a program.) A value for the global variable, Y, is input in line 10. Then the PRINT statement in line 20 causes the function to be evaluated for that value of Y. The result is then printed. (In this example, as in the following example, the local variable is also defined as a global variable.)

[†] A 'local' variable is defined only in relation to the function. It has no significance in the rest of the program. Every other program variable is referred to as a 'global' variable in that, once defined, it remains defined during the entire program. A local variable and a global variable can be defined by the same symbol (see examples no. 2 and no. 3).

NOTE

In the DEF FN statement, the local variable (in this example, Y) must be separated by parentheses. But in statements where the function is called, parentheses are optional.

Example No. 3: The function, A, is defined with X as its local variable, even though the expression has two variables, X and Y, in it. If 3 is input for X, and Y is assigned the five values, 4, 5, 6, 7 and 8, the printout is:

```

5
5.830951895
6.708203932
7.615773106
8.544003745

```

```

10 DEF FN A(X,Y)=X*Y
11 FOR Y=4 TO 8
12   PRINT A(3,Y)
13 NEXT Y
14
15

```



MULTIPLE-LINE FUNCTIONS

Multiple-line functions work much like single-line functions with two additional capabilities:

- More sophisticated functions can be described since a function can be described in a series of program statements.
- The value of any variable or expression within a multiple-line function can be output.

In multiple-line functions, the line boundaries for the total expression are determined by a DEF FN statement and a RETURN[†] statement.

There can be more than one RETURN statement in a multiple-line function (see example no. 2, below). But after the first RETURN statement is accessed, (for instance, RETURN X) the program returns the value of the function to the statement that called the function; e.g., 10 PRINT FNA 3.

Whenever a multiple-line function is in a program, precautions should be taken so that the function will not be inadvertently accessed. Having an END statement immediately prior to the function is, in general, the best possible precaution.

(continued)

[†] This statement is not to be confused with the RETURN statement at the end of a subroutine (although they do perform similarly). For multiple-line functions, RETURN is always followed by a variable or expression (e.g., 90 RETURN X).

DEF FN

(continued)

Examples

#1

```

5 FOR I=1 TO 10
10 PRINT FNA(I);Z
15 NEXT I
20 END
30 DEF FNA(X)
40 Z=X^2+2*X+1
50 Q=SQRZ
60 RETURN Q

```

#2

```

11 INPUT K
21 WRITE (15,31)FNK(K)
31 FORMAT F8.2
41 END
51 DEF FNK(K)
61 L=K^2-6*K+8
71 M=K^2-8*K+15
81 IF L >= M THEN 111
91 PRINT "M =";
101 RETURN M
111 PRINT "L =";
121 RETURN L

```

#3

```

10 INPUT V
20 DISP FNB(V)
30 END
40 DEF FNB(V)
50 W=ABS(4*V-82)
60 X=(W-ABS(V))
70 Y=(W-X)^2
80 Z=ABS(W+X-Y)
90 IF Z<100 THEN 120
100 DISP "WHEN V ="V"Z ="
110 RETURN Z
120 Z=(Z+1)^2
130 DISP "WHEN V ="V"(Z+1)^2 ="
140 RETURN Z

```

Example No. 1: As soon as the PRINT statement, line 10, calls on the function, A, (in the first loop, it is FNA 1) the multiple-line function, lines 30 through 60, is accessed. The required operations are performed and values for Z and Q are determined. Q is then returned as the value of the function and printed. This PRINT statement also prints the value of Z. Each time I is incremented from 1 to 10, the multiple-line function is accessed when the PRINT statement calls on it. The printout is:

2	4
3	9
4	16
5	25
6	36
7	49
8	64
9	81
10	100
11	121

Notice the END statement immediately prior to the multiple-line function; this keeps the function from being inadvertently accessed during normal program execution.

The sequence of variables in the PRINT statement is extremely important. Z is undefined until the multiple-line function is called upon. Since PRINT FNA(I) calls upon the function, an error would occur if the PRINT statement tried to output the value of Z first; e.g., 10 PRINT Z, FNA(I).

Example 1 could have been written more easily. For instance, there could have been a line 45 as follows:

```
45 RETURN SQRZ
```

Then both lines 50 and 60 could be eliminated.

Example No. 2: The WRITE statement, line 21, calls upon the multiple-line function, lines 51 through 121. The function returns the value of either L or M depending on the result of the IF statement, line 81. If $L \geq M$, then L is returned as the value of the function. If $L < M$, then M is returned as the value of the function. Here are two possible printouts:

If K is input as 2:

```
M =      3.00
```

If K is input as 6:

```
L =      8.00
```

Example No. 3: The DISP statement, line 20, calls upon the multiple-line function, lines 40 through 140. Various calculations are performed and if Z (line 90) ≥ 100 , the value of Z calculated in line 80 is returned as the value of the function. But if $Z < 100$, a new value of Z is calculated (line 120) and this value is returned. Three possible displays are:

```
WHEN V = 4      Z = 112
```

```
WHEN V = 8      (Z+1)*2 = 841
```

```
WHEN V = 16     Z = 236
```

Example 2 has a WRITE statement that calls upon a multiple-line function. But if there were a WRITE statement inside the multiple-line function, too, then ERROR 46 would result. (In essence, this would result in two FORMAT statements being accessed at the same time, which is not allowed.)

ARRAYS

CONCEPTS

An array is often a convenient tool for labeling large groups of data within a program. An array is specified by its:

- Name — any letter from A through Z, followed by its
- Size — either one or two numbers enclosed within parentheses.

A two-dimensional array is divided into rows (horizontal) and columns (vertical) — $A(I,J)$ — where I refers to the number of rows and J refers to the number of columns; e.g., $A(2,4)$ could have the following data elements:

$6_{A(1,1)}$	$7_{A(1,2)}$	$5_{A(1,3)}$	$2_{A(1,4)}$
$8_{A(2,1)}$	$4_{A(2,2)}$	$9_{A(2,3)}$	$3_{A(2,4)}$

The subscripts show how each element in the array can be specified; for example: the element, 7, is in row 1, column 2; the element, 8, is in row 2, column 1; and the final element, 3, is in row 2, column 4. The subscripts for the final element also indicate the actual array size — a 2 by 4 array; hence, 8 elements total.

A one-dimensional array can have several rows but only one column. So it can be thought of as — $A(I,1)$ — although it is generally written as — $A(I)$; e.g., a three-element array, $A(3)$, could have the following data elements:

$3_{A(1)}$
 $9_{A(2)}$
 $6_{A(3)}$

Arrays having only one row but several columns must be written as a two-dimensional array — $A(1,J)$.

The size of an array can be specified in either a DIM or COM statement as discussed on pages 3-38 and 3-39. The array size must be specified in one of these statements if the array is either:

- One-dimensional with more than 10 elements, or
- Two-dimensional with more than 10 rows or columns.

If the array size is not specified in either of these statements, the array size is assumed to be 10 for one-dimensional arrays and 10 by 10 for two-dimensional arrays.

If an array is small, say $A(2,2)$, and you would like to maximize memory availability, the actual array size should be specified in either a DIM or COM statement; otherwise, the calculator reserves storage space for all the elements $A(1,1)$ through $A(10,10)$.

Elements in an array can be referenced in several types of program statements: Assignment, PRINT, DISP, WRITE, INPUT, and READ statements. They can also be used in program expressions, say, as: $\text{PRINT } 4 * A(2) \uparrow 3$.

PROGRAMMING DATA ELEMENTS INTO ARRAYS

To input several data elements into array form, a program should perform a 'looping' operation. The IF and GOTO statements can accomplish this looping, but it is generally easier to use the FOR...NEXT statements. The following examples show a few of the available techniques. (In these examples, the array sizes are small enough so that neither the DIM nor the COM statement is required.)

- One-dimensional arrays (7 elements):

<pre>#1 10 FOR I=1 TO 7 20 INPUT A(I) 30 NEXT I 40 END</pre>	<pre>#2 10 FOR I=1 TO 7 20 READ A(I) 30 NEXT I 40 END 50 DATA 9,8,7,6,5,4,3</pre>
--------------------------------------------------------------	-----------------------------------------------------------------------------------

In the first example, a data element is input from the keyboard each of the seven times the loop is executed. In the second example, a data element is read in from the DATA statement each of the seven times the loop is executed.

- Two-dimensional arrays (3 by 5 – 15 elements):

<pre>#1 10 FOR I=1 TO 3 20 FOR J=1 TO 5 30 READ A(I,J) 40 NEXT J 50 NEXT I 60 END 70 DATA 11,12,13,14,15 80 DATA 21,22,23,24,25 90 DATA 31,32,33,34,35</pre>	<pre>#2 10 FOR I=1 TO 3 20 FOR J=1 TO 5 30 DISP "ROW" I, "COLUMN" J; 40 INPUT A(I,J) 50 NEXT J 60 NEXT I 70 END</pre>
--------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------


```
#3
10 FOR I=1 TO 3
20 DISP "INPUT ROW" I;
30 INPUT A(I,1),A(I,2),A(I,3),A(I,4),A(I,5)
40 NEXT I
50 END
```

Example No. 1: In this program, there are two FOR...NEXT statements. For each value of I, the 'J' loop is executed five times. (So, five data elements are assigned per row.) The three DATA statements correspond to the way in which the data elements are read – row by row, five elements per row. The array elements are positioned as follows:

11 _{A(1,1)}	12 _{A(1,2)}	13 _{A(1,3)}	14 _{A(1,4)}	15 _{A(1,5)}
21 _{A(2,1)}	22 _{A(2,2)}	23 _{A(2,3)}	24 _{A(2,4)}	25 _{A(2,5)}
31 _{A(3,1)}	32 _{A(3,2)}	33 _{A(3,3)}	34 _{A(3,4)}	35 _{A(3,5)}

Examples No. 2 & No. 3: In these examples, the arrays are assigned values through INPUT statements. The technique used in example no. 2 is much like the one used in example no. 1, with the two FOR...NEXT statements. But in example no. 3, values are input using only one FOR...NEXT statement.

◆◆◆◆◆ DIM ◆◆◆◆◆

The DIM (Dimension) statement causes the calculator to reserve memory for the specified simple and array variables. If arrays are dimensioned, the actual array sizes then input can be less than or equal to the sizes specified.

When either the INIT (Initialize) key is pressed or the program is run, memory storage is allocated to the specified variables.

- Generally, four words of memory are allocated per data element (16 calculator bits per word); e.g.,

```
10 DIM A[5,4],B[5,8]
```

240 words are allocated:
80 in array A, 160 in array B.

Each data element has full-precision (12-digit) accuracy.

- But there may be times when it is necessary to conserve memory storage. So two words of memory can be allocated per data element with split-precision (6-digit) accuracy for each element; e.g.,

```
10 DIM AS[5,4],BS[5,8]
```

where 'S' indicates split-precision and 120 words are allocated:
40 in array A, 80 in array B.

These data elements cannot have values either less than $-9.99999E+63$ or greater than $+9.99999E+63$.

- Only one word of memory is allocated per data element with integer-precision accuracy for each element; e.g.,

```
10 DIM AI[5,4],BI[5,8]
```

where 'I' indicates integer-precision and 60 words are allocated:
20 in array A, 40 in array B.

These data elements are rounded to integer values; the values cannot be less than -32767 or greater than $+32767$.

Full-precision, split-precision, and integer-precision accuracy can be mixed in a DIM statement; e.g.,

```
10 DIM A[25],B[5,5],C[25,2],DI[100],EI[50,2],FS[50]
```

In this example, each array is allocated 100 words of memory due to the particular specifications.

Notes:

- The location of the DIM statement within the program is arbitrary.
- A program can have more than one DIM statement.
- One-dimensional and two-dimensional arrays cannot have the same name; e.g., 10 DIM A(3), A(5,5), is not allowed.
- Once a split or integer-precision array is dimensioned, no additional reference can be given to the 'S' or 'I'; e.g.,

<pre>10 DIM GS[8],HI[4,3] 20 G(1)=12.4 30 H(2,1)=32.2</pre>	}	Allowed	<pre>20 GS(1)=12.4 30 HI(2,1)=32.2</pre>	}	Not allowed
-------------------------------------------------------------	---	---------	------------------------------------------	---	-------------



COM

The COM (Common) statement, like the DIM statement, causes the calculator to reserve memory for the designated number of simple and array variables. The unique features of the COM statement are as follows:

- Data can be transferred from one program to another if data, common to both programs, is specified in separate COM statements.
- Once a common storage area is reserved in memory, it remains there until either the program memory is erased or another COM statement alters its appearance.

When storing data on tape cassettes, (see STORE DATA, Chapter 5), COM has two important features:

- The values of all variables specified in COM can be stored on the same tape cassette file. (Without COM, only one array can be specified per file.)
- Since simple variables can be specified in COM, their values can also be stored on a tape cassette. (Without COM, only arrays can be specified in a STORE DATA command.)

The Model 30 immediately reserves memory storage space for the data elements specified in the COM statement when it is entered into memory. Because of this, the following two rules must be followed:

- COM must be both the first program statement entered and the lowest numbered statement in memory — if several required statements are already in memory and you need to enter a COM statement, follow these four steps 1) store the required statements on a tape cassette, 2) erase program memory — SCRATCH EXECUTE, 3) key in the COM statement, and finally 4) load the rest of the statements back into memory from the cassette (see STORE and LOAD, chapter 5).
- COM cannot be edited once it is entered into memory; however, if you would like to change the COM statement, follow the four steps just discussed.

The COM statement may not be necessary in your program:

- When programs are brought into memory from a tape cassette, the COM statement is not necessarily needed to transfer data from one program to another. Often, it is more convenient to use the LINK command (see LINK, Chapter 5).
- The same variables cannot be specified in both a COM and a DIM statement. So if the only need for either of these statements is to define array sizes, it is probably more convenient to use the DIM statement.
- COM is generally unnecessary for programs on a Special Function key (see Chapter 6) especially if a common area has already been defined in mainline memory; for the values of variables in mainline memory are also accessible by a program on a Special Function key.

Common area storage space is allocated in the same order in which the variables appear in a COM statement; elements within an array are stored row by row; e.g.,

```
1 COM C[2,3],D,A[3]
```

Storage space for this COM statement is allocated in the following order:

C(1,1), C(1,2), C(1,3), C(2,1), C(2,2), C(2,3), D, A(1), A(2), A(3)



COM

(continued)

If the COM statements in two successive programs are identical, then the values assigned to the variables in the first program will be assigned to the same variables in the second program.

———— For Advanced Programmers ————

If, however, the COM statements in two successive programs are different, then the values assigned to the variables in the second program depend on the element positions of the values. For example, if the COM statement in the first program is:

```
1 COM A[2,3],B[4]
```

and the following program has the COM statement:

```
1 COM Z[6],A[2,2]
```

then the elements in common storage are assigned as follows:

Element Position	First Program Reference	Second Program Reference
1	A(1,1)	Z(1)
2	A(1,2)	Z(2)
3	A(1,3)	A(3)
4	A(2,1)	Z(4)
5	A(2,2)	Z(5)
6	A(2,3)	Z(6)
7	B(1)	A(1,1)
8	B(2)	A(1,2)
9	B(3)	A(2,1)
10	B(4)	A(2,2)

A reference to the variable, A(2,2), in the first program accesses the value in element position 5; whereas a reference to the variable, A(2,2), in the second program accesses the value in element position 10.

The variable, A(1,1), in the first program references the same element position as the variable, Z(1), in the second program.

Simple variables, split-precision variables, and integer-precision variables can also be used in COM statements.

However, if two successive programs have different COM statements, (to ensure that element positions line up as intended) arrays should be aligned with arrays having the same number of elements, simple variables should be aligned with simple variables, split-precision arrays should be aligned with split-precision arrays, etc.

Successive COM statements need not have the same number of elements. But a program on a Special Function key (see page 6-4) cannot have a COM statement larger than the COM statement in mainline memory.

If, say, the first program that is run specifies:

```
1 COM A[10],B[5]
```

and the second program that is run specifies:

```
1 COM AC101
```

then the storage allocated to the B array is erased.

◆◆◆◆◆ ADDITIONAL STATEMENTS ◆◆◆◆◆

◆ FIXED N, FLOAT N, STANDARD

In PRINT and DISP statements, numerical outputs appear in standard notation unless either fixed-point or floating-point notation has been specified in a prior program statement.[†] If standard notation is then specified in a later program statement, numerical outputs from PRINT or DISP statements will again appear in standard notation.

Examples

```
10 PRINT 3
20 FIXED 4
30 PRINT 3
40 FLOAT 5
50 PRINT 3
60 STANDARD
70 PRINT 3
80 END
```

ADDITIONAL
STATEMENTS

Since PRINT statements output in standard notation unless fixed-point or floating-point has been previously programmed in, the printout from line 10 is:

```
3
```

Since line 20 programs in a fixed '4' format, the printout from line 30 is:

```
3.0000
```

Since line 40 programs in a float '5' format, the printout from line 50 is:

```
3.000000E+00
```

Since line 60 causes the program to revert back to standard notation, the printout from line 70 is:

```
3
```

(continued)

[†] Standard, fixed-point, and floating-point notation are discussed beginning on page 2-1.

◆◆◆◆◆ ADDITIONAL STATEMENTS ◆◆◆◆◆

(continued)

DEG, GRAD, RAD ◆

In a program, angles are calculated in radians unless either degrees or grads have been specified in a prior program statement. If radians are then specified in a later program statement, angles will again be calculated in radians.

◆ Examples ◆

```

10 X=SIN30
20 DEG
30 Y=SIN30
40 GRAD
50 Z=SIN30
60 RAD
70 X1=SIN30
80 PRINT X,Y,Z,X1
90 END

```

In line 10, X is calculated in radians; in line 30, Y is calculated in degrees; in line 50, Z is calculated in grads; in line 70, X1 is calculated in radians. The printout for X, Y, Z, and X1 is:

```

-0.988031624      0.500000000      0.453990500      -0.988031624

```

When the calculator is initialized or another program is run, the calculator reverts both to standard notation and to radians.

PROGRAMMABLE TAPE COMMANDS ◆

All tape cassette commands are programmable. These commands are discussed individually in Chapter 5.

◆◆◆◆◆ FLOWCHARTING TECHNIQUES ◆◆◆◆◆


If you are a beginning programmer, you may be interested in knowing some of the techniques available that allow you to more easily advance from a conceptual stage in a programming task to a finalized stage.

Flowcharts, which logically pictorialize the solution to a programming task, are valuable programming tools. They are often drawn long before the actual program statements are written.

While flowcharting your problem, you might change or simplify your approach, see a flaw in your logic, etc. After several attempts, you should have a workable flowchart and, once you do, your programming task is greatly reduced.

Any flowchart that you draw is useful; but a few basic flowcharting conventions are described briefly here. Terminal (that is, starting or ending) activities are represented by ovals. Arrows, indicate the order of operations between the terminals. Most calculator operations are represented by rectangles. A diamond represents a decision point. If the information within the diamond is computed as 'YES', the logical flow continues in one direction; if it is computed as 'NO', the logical flow continues in another direction.

For your convenience, in the following example we have labeled each flowcharting operation with the corresponding program line number. As can be seen, once the flowchart is finalized, the program can be written relatively easily.

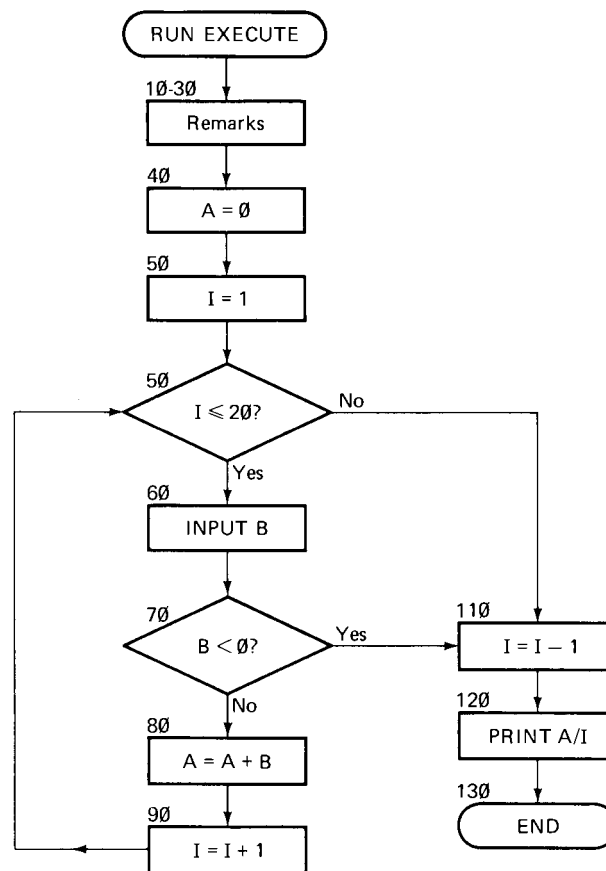

```

10 REM--THIS PROGRAM AVERAGES UP TO 20 POSITIVE NUMBERS.
20 REM--IF YOU HAVE FEWER THAN 20 NUMBERS TO ENTER,
30 REM--ENTER A NEGATIVE NUMBER TO END THE INPUTTING.
40 A=0
50 FOR I=1 TO 20
60 INPUT B
70 IF B<0 THEN 110
80 A=A+B
90 NEXT I
110 I=I-1
120 PRINT "THE AVERAGE OF THE" I "NUMBERS IS" A/I
130 END
  
```

◆◆◆◆◆ BASIC SYNTAXES ◆◆◆◆◆

Legend

brackets []	— items enclosed within brackets are optional.
coloring	— colored items must appear as shown.
character	— a letter, a number or a symbol.
constant	— a number within the range of the calculator.
expression	— a constant [like 16.4], a variable [like B or D(6)] or an expression [like 8*A↑2 or 6=A].
letter	— an alphabetic character from A through Z.
line number	— an integer from 1 through 9999.
local variable	— a simple variable defined only in relation to the function.
n	— an integer from 0 through 11.
select code	— an integer from 1 through 15.
text	— a series of characters enclosed within quotation marks.
variable	— a simple variable [like B or B7] or an array variable [like F(9)].

All programming statements must be preceded by a line number.

variable = expression or LET variable = expression
Assignment statement; assigns variable a value.

COM variable [, variable . . . , variable]
Reserves memory for the specified variables and allows data to be transferred from one program to another. Must be both the first statement entered and the lowest-numbered statement.

DATA constant [, constant . . . , constant]
Specifies data for READ statement variables.

DEF FN letter (local variable) = expression or DEF FN letter (local variable)
Defines a function in one line (first syntax) or in several lines (second syntax); in the latter case, a RETURN statement is also needed.

DIM variable [, variable . . . , variable]
Reserves memory for the specified variables when the calculator is initialized.

DISP [any combination of text and expressions]
Allows text and values to be output on the Model 30 display; follows the same rules as the PRINT statement.

END
Terminates program execution and resets the program line counter to the lowest-numbered statement in memory.

FOR simple variable = expression TO expression [STEP expression]
Executes the program lines between FOR and the corresponding NEXT statement a designated number of times; each time the loop is executed, the simple variable is incremented by 1, unless STEP is specified.

FORMAT any combination of text or other specifications

Gives output specifications to the WRITE statement that referenced it; specifications can be: Fw.d (for fixed-point format), Ew.d (for exponential format), X (for a character space), / (for a carriage return—line feed), B (for special ASCII characters); any specification can be repeated (say, 6Fw.d); specifications must be separated by commas.

GOSUB line number

Begins executing the subroutine at the specified line number; must have corresponding RETURN statement.

GOSUB expression OF line number [, line number . . . , line number]

Begins executing the subroutine at the first line number if the expression is rounded to 1, at the second line number if the expression is rounded to 2, etc.; must have corresponding RETURN statement.

GOTO line number

Transfers program execution to the specified line number.

GOTO expression OF line number [, line number . . . , line number]

Transfers program execution to the first line number if the expression is rounded to 1, to the second line number if the expression is rounded to 2, etc.

IF expression THEN line number

Expression is logically evaluated; if it is evaluated as 'true', program execution is transferred to the specified line number.

INPUT variable [, variable . . . , variable]

Allows values to be assigned to the variables, from the Model 30 keyboard, during program execution, when a '?' appears on the display.

LET variable = expression or variable = expression

Assignment statement; assigns variable a value.



NEXT simple variable

Marks the end of the corresponding FOR loop.

PRINT [any combination of text and expressions]

Allows text and values to be output on the primary printer; successive expressions must be separated either by commas (for maximum spacing between successive outputs) or by semicolons (for minimum spacing between successive outputs); if no parameters follow PRINT, the printer performs a carriage return—line feed; parameters can also include: TAB expression — so that the following parameter is output beginning at the absolute character position (from 0 through 71) specified by TAB.

READ variable [, variable . . . , variable]

Reads, from the DATA statement (beginning at the current data pointer position), values for the specified variables.

REM [any combination of characters]

Inserts non-executable remarks in a program.

RESTORE [line number]

Resets data pointer (see READ and DATA) to the first constant in the lowest-numbered DATA statement if the line number is not specified; or resets the data pointer to the first constant in the DATA statement with the specified line number.

RETURN [expression]

With no expression specified, RETURN is the subroutine exit, transferring program execution to the line following the GOSUB statement; if an expression is specified, RETURN is the multiple-line function exit, transferring the value of the function to the statement that called it (see DEF FN).

(Continued)

 **BASIC SYNTAXES** 

(Continued)

STOP

Terminates program execution but, unlike END, it retains the current position of the program line counter.

WAIT expression

Causes the calculator to halt the specified number of milliseconds; the delay can vary between 0 and 32767 milliseconds.

WRITE (select code, [*] or [line number]) [any combination of text and expressions]

With the '*' specification, WRITE is like the PRINT statement except that any printer can be specified by select code; with the line number specification, the parameters are output according to the specifications in the corresponding FORMAT statement.

[DEG] or [GRAD] or [RAD]

Specifies units for calculating angles; if not specified, RAD is assumed.

[FIXED n] or [FLOAT n] or [STANDARD]

Specifies numerical output form for PRINT and DISP statements; if not specified, STANDARD is assumed.

Chapter 4






PROGRAMMING-RELATED INFORMATION

In Chapter 3, general programming techniques were discussed along with the BASIC language statements. In this chapter, most of the topics discussed emphasize the ease of programming the Model 30. Topics include:

- Standard programming commands
- Time-saving commands
- Program-viewing and editing techniques
- Programming checks
- Calculator memory.

◆◆◆ STANDARD PROGRAMMING COMMANDS ◆◆◆

The following keys and commands were discussed briefly in Chapter 3:

-  which enters program lines into memory.
-  which runs the lowest-numbered program in memory.
-  which halts a program that is running unless the program is waiting at an INPUT statement.
-  which halts a program that is waiting at an INPUT statement.
-  which continues a program that was previously halted; if the program was halted by either a STOP command or a STOP statement, the program continues from the line number where it was halted. Otherwise, it continues at the lowest-numbered line in memory.

RUN, STOP, and CONT have additional capabilities as discussed next.

STANDARD PROGRAMMING COMMANDS



(continued)

RUN






If there are several programs in memory, any of these programs can be executed by using the RUN command. For instance:

Program #1	{	10 INPUT A,B 20 PRINT A↑2+B↑2 : : : 90 END
Program #2	{	100 INPUT C,D 110 PRINT C↑2-D↑2 : : : 190 END
Program #3	{	200 INPUT X,Y 210 PRINT SQR(X↑2+Y↑2) : : : 290 END






Pressing:



 executes program #1.

Pressing:






 executes program #3, beginning at line number 200.

Or pressing:






 executes program #2, beginning at line number 100.


Whenever the RUN command is executed, variables that were assigned values in the previous program become undefined (unless both programs have a COM statement). For instance:

```

10 X=15
20 END
30 PRINT X
40 END


```

If you press:



Lines 10 and 20 are executed and the variable X is set equal to 15.

But then if you press:




The calculator tries to execute line 30 but cannot since the variable X is undefined. So error 40 results. (The CONT command, discussed on page 4-4, could have been used instead.)

STOP

Besides being used to halt a program that is currently running (see page 4-1), the STOP command has another variation. For instance, if the following program is in memory:


```
10 INPUT X,Y
...
90 DISP X^2+Y^2
...
150 X=X+Y
...
200 GOTO 10
```

and the following keys are pressed:




If the program is subsequently run without having any program lines edited, the program will halt at line 150 (that is, line 150 is not executed). If the program is then continued or re-run, and line 150 is again encountered, the program will once again halt there.

Either one or two line numbers can be specified in a STOP command. For instance, the following keys could be pressed:



If the previous program is then run, it will halt at line 90. If it is then continued from this point, it will subsequently halt at line 150. When either of these two lines is encountered, the program halts.

To have the program revert to normal execution when it is again run, either press:



or edit any portion of the program.

STANDARD PROGRAMMING COMMANDS

(continued)


CONT

When the keys — CONT EXECUTE — are pressed, program execution continues from the point where it was previously halted, if the program was previously halted by either a STOP command or a STOP statement. Otherwise, it continues at the lowest-numbered line in memory.

Unlike the RUN command, which erases the values of variables in memory, the CONT command does not affect variables.

Like the RUN command, which can run a program beginning at a specified line number, the CONT command can continue program execution at a specified line number.

For instance, pressing:



would continue a program's execution at line 200 without affecting any of the variables previously defined.


TIME-SAVING COMMANDS

TIME-SAVING
COMMANDS

The following two commands simplify program line numbering.


AUTO#

Each program line must be preceded by a line number. If several program lines need to be keyed in, the AUTO# (Automatic Line Numbering) command can be used to simplify the task. By pressing:




The first line number, 10, immediately appears on the display. After this line is keyed in, successive line numbers will be: 20, 30, 40 . . . ; that is, a spacing of 10 between consecutive line numbers.


The AUTO# command can specify the beginning line number to appear on the display. If it does, it can also specify the spacing between line numbers. The first number specified is the beginning line number; the second number specified is the spacing. If no spacing is specified, a spacing of 10 is always assumed. Here are some examples:



The line numbering would be: 30, 40, 50, 60, . . .



The line numbering would be: 50, 55, 60, 65, . . .



During automatic line numbering, after one line is entered into memory, the next line number appears on the display. If the line numbering sequence is somehow altered (say, the CLEAR key is pressed), automatic line numbering ceases. In a case such as this, to reinstate automatic line numbering at a specific line number, just use the techniques previously discussed.

During automatic line numbering, the DELETE LINE key can be pressed instead of CLEAR. DELETE LINE performs the same function as CLEAR without eliminating automatic line numbering (see DELETE LINE, page 4-8).

REN


Occasionally, it is necessary to change the spacing between line numbers to allow for the insertion of additional program lines. The REN (Renumber) command provides this capability.

With this command, all program lines in memory are renumbered. Furthermore, program lines referenced in statements (e.g., GOTO 20) are appropriately renumbered. Here are some examples of the REN command:

If these are the program lines in memory:

1, 2, 5, 6, 7, 8, 111, 112, 113, 114




and you press:



The ten lines in memory are now numbered:

10, 20, 30, 40, ... 100

As in the AUTO# command, both the lowest line number and the spacing between consecutive line numbers can be specified. The first number specified is the beginning line number; the second number specified is the spacing. If no spacing is specified, a spacing of 10 is always assumed. Here are some examples:




PROGRAM VIEWING

The commands discussed in this section allow the programmer to view individual program statements or to view a series of program statements.


FETCH

Any program line in memory can be brought to the display if the FETCH command is used. If line 65 is in memory, you can display it by pressing:




If the line number specified by the FETCH command is not in memory, then the next higher-numbered line is displayed; if there are no lines numbered higher than the one specified, then the highest-numbered line in memory is displayed.

The highest-numbered line in memory is always displayed if you press:



The lowest-numbered line in memory is always displayed if you press:



Every program line in memory can be viewed by using these keys.

Each time is pressed, the next higher-numbered program line is displayed. Each time is pressed, the next lower-numbered program line is displayed.

When either of these keys is pressed, the first line number displayed depends on the last line number that was accessed. For example, if the following lines are in memory:

10, 20, 30, 40, 50

and the FETCH command is used to access line 30:

Then if is pressed, line 40 is displayed; whereas had been pressed, line 20 would have been displayed.


But if a program has just been run:

Pressing , displays the lowest-numbered line in memory; whereas pressing , displays the highest-numbered line in memory.


If either of these keys is held down for about two seconds, the operation of the key is rapidly repeated.

LIST


With the LIST command, program lines can be output on any compatible printer or paper tape device. Merely specify the select code of the appropriate device; for example:

 All the program lines currently in memory would be output in line number order on the device with select code #8. The '#' (number sign) is necessary in this case.

However, if you want to output on the primary printer (select code #15), just press:

 Select code #15 is assumed if no select code is specified. So, in this case, all program lines are output on the primary printer.

Program lines can be selectively output by using the LIST command. For example, if lines 1 through 100 are in memory and you press:

 All program lines, numbered 40 and higher, are printed.

Or if you press:

 Program lines 5 through 18 are printed.

If only one line number is specified, as in the first case, only the lower boundary of the listing is specified. But if two line numbers are specified (separated by commas), as in the second case, both the lower and the upper boundaries of the listing are specified.

A number always appears on the display after a LIST command is executed. This number is the available calculator memory. The calculator memory is discussed beginning on page 4-12.

PROGRAM EDITING

Programs can be easily modified if the keys and commands, discussed in this section, are used.

BACK **FORWARD** **INSERT**

These three keys can be used in the programming mode in the same way that they are used in the keyboard mode (see page 2-10). Any time a program line appears in the display, it can be modified by using these keys. After the line is appropriately corrected, press the END OF LINE key to put the corrected version of the line into memory.

NOTE

It makes no difference where the blinking indicator is positioned when the END OF LINE key is pressed. Regardless of the position, the entire program line is entered into memory.

RECALL

This key also can be used in the programming mode in the same way that it is used in the calculator mode. If you try to enter a program line into memory and an error message appears on the display, press **RECALL**. The line you just keyed in is returned to the display. Appropriate corrections can then be made and the line can be entered into memory by pressing the END OF LINE key.

**DELETE
LINE**

During keyboard operations, if either the CLEAR key or the DELETE LINE key is pressed, the display is erased. The difference between the two keys is evident if a program line that is stored in memory is displayed. With the symbol, $\bar{\text{I}}$, displayed at the end of the program line, the DELETE LINE key can be pressed both to clear the display and to erase the program line from memory; pressing the CLEAR key clears the display only.

Whenever you are displaying a line previously entered into memory, (e.g., 10 A=6 $\bar{\text{I}}$) to erase it from memory, just press the DELETE LINE key.


As mentioned with the AUTO# command, pressing the DELETE LINE key during automatic line numbering operations does not affect the automatic line numbering; it merely erases the rest of the display. However, pressing the CLEAR key erases the entire display, including the automatic line numbering.

DEL


The DEL (Delete) command can erase any number of consecutive lines from memory. If lines 1 through 100 are in memory, lines 22 through 35 can be deleted by pressing:

(D) (E) (L) (2) (2) (,) (3) (5) (EXECUTE)


but if, instead, you press:

 All program lines, beginning at line 22, are deleted.

To delete just one program line, say, line 82, you can press:








But there is an easier way to delete one line without using the DEL command. Just press:

 and line 82 is deleted. Any time a line number is keyed in, followed immediately by END OF LINE, the specified line is erased from memory.

SCRATCH

The SCRATCH key was discussed on page 2-14. The SCRATCH commands that are most useful in programming are as follows:

  All variables and program lines are erased from mainline memory. (Information on Special Function keys, see Chapter 6, is not affected.)

   All of memory is erased as in turning the power off then on again. Before a large program is entered into memory, this command ensures that the maximum amount of memory is available.

PROGRAMMING CHECKS


The techniques discussed in this section allow the programmer to make various checks during program execution to ensure that the program is operating correctly.

TRACE **NORMAL**


The TRACE command is used to follow the order of statement execution in a program. If the TRACE key is pressed during program execution, the program line numbers are printed in the order in which they are accessed; if the NORMAL key is then pressed while the program is still running, the TRACE command is nullified. So during program execution, both TRACE and NORMAL are 'immediate execute' keys.

If the program is not currently running, the TRACE command has the following capabilities.


- It can be set to trace the order of statement execution when the program is again run. Just press:




- It can be set to trace from a specific line number, if the lowest line number to be traced is specified. For instance, with the following command, all lines numbered 80 and higher will be traced when the program is again run:



- It can be set to trace groups of line numbers, if both the lowest and the highest line numbers to be traced are specified. For instance, with the following command, all lines numbered 120 through 160 will be traced when the program is again run.



While the program is running, any of these TRACE commands are immediately nullified if the NORMAL key is pressed. But if the program has been halted with TRACE still in effect, TRACE is nullified if you press:



STEP

If a program is not running, it can be continued one line at a time if the STEP command is used. STEP is always an 'immediate execute' key. As soon as it is pressed, the line designated by the internal program line counter is executed, then the program halts again. When the program halts, the current position of the program line counter is displayed; that is, if **STEP** is pressed again, the line specified in the display will be executed.

For example, suppose the following program is run:

```

10 Y=SINPI/2
20 DISP Y
.
.
.
60 STOP
70 DEG
80 Z=SIN90
90 DISP Y,Z
.
.
.
200 END

```

This program halts after line 60, the STOP statement, is executed. So the program line counter is positioned at line 70. If **STEP** is then pressed, only line 70 is executed. Each time **STEP** is pressed, only the line designated by the program line counter is executed. An entire program can be run this way. (The next section, Checking a Halted Program, shows why it can be desirable to execute a program step-by-step.)

———— For Advanced Programmers ————

In the previous program, after line 200 is executed, the program line counter reverts to line 10. If the STEP command (or the CONT command) is then used to continue program execution at line 10, the program does not go through an initializing phase; that is, variables retain their current values, operating modes (like calculating angles in radians) are not reset, etc. With the RUN command, this initializing phase is automatic. So, in this example, if STEP is used after line 200 is executed, the angle, Y, is calculated in degrees since line 70 previously set this mode.

—————▶ CHECKING A HALTED PROGRAM

Various operations can be performed on a halted program:

- Values of variables can be checked merely by keying in the variable name, followed by EXECUTE.
- Values of variables can be assigned or changed if commands like A=7 are executed.
- Many program statements can be keyed in as executable commands; that is, without line numbers and followed by the EXECUTE key:

PRINT statements	}	to immediately output specified information.
WRITE statements		
DISP statements		
GOTO statements	}	to reset the program line counter to a specified line.
GOTO with OF statements		
RESTORE statement — to reset the data pointer to the first data element.		
- Any keyboard command can be executed: degrees, grads, radians, fixed n, float n, standard, etc. Also, arithmetic operations can be performed.

(continued)

PROGRAMMING CHECKS

(continued)

If the halted program is continued with either the CONT or the STEP command, any of the previously mentioned operations that affect the program execution remain intact. For instance: values of variables that were changed retain their new values; a GOTO command causes the program to continue at the specified line number; a DEG command causes the program to calculate angles in degrees; etc.

If, however, the halted program is restarted with a RUN command, then the program is initialized and the calculator reverts to all standard operating modes.

Furthermore, if any program lines are inserted, deleted, or edited while the program is halted, the program line counter is repositioned at the lowest numbered line in memory.

CALCULATOR MEMORY

In the Model 30, the total amount of user memory is expressed in 'words'. (For the computer oriented, there are 16 bits — two bytes — per word.) The basic calculator (with no memory options) has 1760 words of available memory.

Program statements take up a variable number of words with as few as three words allocated in some statements, such as STOP and END. Methods for determining the available memory are discussed next.


LIST

As mentioned earlier in this chapter, the LIST command always displays the available user memory after it performs a program listing. To determine the maximum amount of user memory, it is necessary first to erase everything in memory (thus making all of memory available) and then to perform a LIST command. So if you press:



the number that appears on the display is the total calculator memory. (Any memory options that have been installed are also included in this number.)

If information is in memory and you want to determine how much memory is still available, it is generally easiest to press:



The number that immediately appears on the display is the available memory. Whenever the number specified in the LIST command is greater than the largest line number currently in memory, no program lines are listed and the available memory is immediately displayed. So by using LIST 9999, you need not be concerned about the line numbers currently in memory. For no line number greater than 9999 can be specified.

————— For Advanced Programmers —————


The LIST command gives totally different results when executed both before and after a program is run:

- Prior to running a program
 - without a COM statement, the file size needed to store the program on tape is determined by subtracting the LIST 9999 result from the total user memory. (Tape cassettes are discussed in Chapter 5.)
 - with a COM statement, the file size determined by the previous method minus the memory reserved for variables in the COM statement is the true file size needed to store the program (Remember, each full-precision element in common has four words of memory allocated to it.)
- After running a program, when LIST 9999 is again executed, the available memory being displayed, subtracted from the total user memory, determines the approximate† amount of memory needed to run this program.

➡ **INIT**

The INIT (Initialize) key resets the calculator to the state it was in immediately prior to program execution unless the program has a COM or DIM statement in it. Furthermore, program variables, not defined in a COM statement, are erased when the INIT key is pressed.

If a program is executed and a LIST 9999 command is then executed, the approximate amount of memory needed to run the program is determined by subtracting the number on the display from the total calculator memory. If this program has neither a COM nor a DIM statement in it, the file size needed to store the program on tape can then be determined if you press:



and subtract the number on the display from the total calculator memory.

Other uses of the INIT key are discussed in the following section.


† This is usually very close to the amount of memory actually needed. The difference exists because, during program execution, some memory is temporarily needed to run different parts of the program.

◆◆◆◆◆ ADDITIONAL COMMANDS ◆◆◆◆◆

The three commands discussed in this section provide the Model 30 with additional programming capabilities. Their uses are intended primarily for the advanced programmer.

INIT


The INIT (Initialize) key was discussed in the previous section as a tool for determining program memory. Other uses for this key are discussed here.

When  is pressed, it performs identically to the RUN command except that the program is not executed:

- All variable values, aside from those specified in a COM statement, are erased.
- All normal programming modes are reset — angles are calculated in radians, outputs appear in standard notation.
- Memory is reserved for all elements in a DIM statement. (Memory for the elements in a COM statement is immediately reserved when COM is entered into memory.)
- The memory reserved for DIM and COM statement elements can be accessed. (Although memory is reserved for COM before the INIT key is pressed, this portion of memory cannot be accessed until either the INIT or RUN command is given.)

Since the INIT command performs this way, it offers the following additional feature when it is pressed:

The programmer has the option of inputting values for some or all of his program variables before the program is run. After the required data [say, $A(1)=6$... $A(12)=8$, etc.] is keyed in, the program can be executed by pressing:



(Remember the RUN command would erase the values just assigned to the variables.)

NOTE

The INIT command is unnecessary if only simple variables are being input and if the program has neither a COM nor a DIM statement.

PTAPE

The PTAPE command allows the calculator to read in program statements from an input device, ASCII† character by ASCII character. Compatible devices include the -hp- 9863A Tape Reader, the -hp- 9869A Card Reader, the -hp- 2748A Optical Tape Reader, and the -hp- 11205A Serial Interface (with teletype).

Just key in either: PTAPE# or PTA# followed by the appropriate select code for the input device. Then press the EXECUTE key.

If the device with the specified select code is not connected to the Model 30, the calculator waits until it is attached to complete the command. During this time the display will be blank. You can, of course, regain immediate control of the calculator by pressing the STOP key.

† ASCII (American Standard Code for Information Interchange) is understood by the Model 30.

During the implementation of this command, each line being loaded into memory has its syntax checked; if a line is in error, it will be rejected — thus, only those lines with correct syntax are loaded into the calculator. To obtain a record of the rejected lines, it is necessary to put the calculator in the print-all mode prior to executing the PTAPE command; in print-all mode, all rejected lines are printed.

NOTE

To punch information onto paper tape, use the LIST command as discussed earlier.


SEC

The SEC (Secure) command has the capability of concealing program lines from potential users; that is, your program could be given to another person who could load it into the calculator from a cassette file and then run it — however, he would not be able to view particular program lines nor could he store the program on any other cassette file. (Tape cassettes are discussed in the next chapter.)


Any attempt to display or list a secured program line results in the line number appearing, followed by an asterisk (*).

The SEC command has the following three variations:


- All program lines in memory can be secured if you press:



- All program lines, beginning at a specified line number, can be secured. For example, all program lines, beginning at line 200 are secured if you press:



- Program lines can be selectively secured. For example, program lines 30 through 60 are secured if you press:



Since a program can have both secured and unsecured program lines, on a program listing only the secured lines appear with an asterisk following the line number.

When any part of a program is initially secured, the program can still be reproduced onto as many cassette files as necessary. However, once the program is erased from memory, (even though it can be loaded back into memory) no portion of it can be reproduced onto any other files — not even an unsecured portion.

NOTE

When any program lines are secured, the entire calculator is in a 'secured mode'. Therefore, after the secured program is stored away, the user should erase all of memory before inputting other programs — thus, avoiding 'secured program' errors.

5-0



NOTES

Chapter 5

USING A TAPE CASSETTE

The tape transport, built into the Model 30, provides the calculator with considerable flexibility as described in this chapter. Cassette commands are described beginning on page 5-4.

THE TAPE CASSETTE

The -hp- tape cassette used with the Model 30 is a precision unit, containing 300 feet of digital-quality, magnetic recording tape. These and other important characteristics make this tape cassette ideally suited for use with the calculator.

SPECIFICATIONS

Search Speed: Approximately 130 ft/min (search is bi-directional).

Data Storage: More than 32,000 words can be recorded.



OTHER CASSETTES

Although many other manufacturers' tape cassettes will initially work with the Model 30, many of these products will not make reliable recordings. Also, since the use of some tape cassettes will actually damage the tape transport, you should be cautious about using other cassettes.

For additional information on requirements for a tape cassette, contact your nearest -hp- Sales and Service Office; office locations are listed at the back of this book.

INSERTING TAPE CASSETTES

To open the transport door, flick the switch on the upper right-hand corner of the calculator keyboard. Then insert the tape cassette by sliding it through the guide posts on the transport door; be sure the cassette is right-side up with the FRONT label facing you. Finally, push the door closed.

Whenever you want to remove the cassette from the transport, press the key **REWIND** first. This fully rewinds the tape to clear-leader, thus shielding the recorded portion of the tape against dirt or damage.

PROTECTING CASSETTES

The information recorded on a tape cassette can be protected (that is, further recording is not allowed) if you remove both tabs that are on top of the cassette — see Figure 5-1.

If only the left tab is removed, the tape cassette is still essentially protected. But, in this case, it would still be possible for someone to insert the tape cassette backwards into the tape transport and record over previously recorded information.

(Continued)

THE TAPE CASSETTE

(Continued)

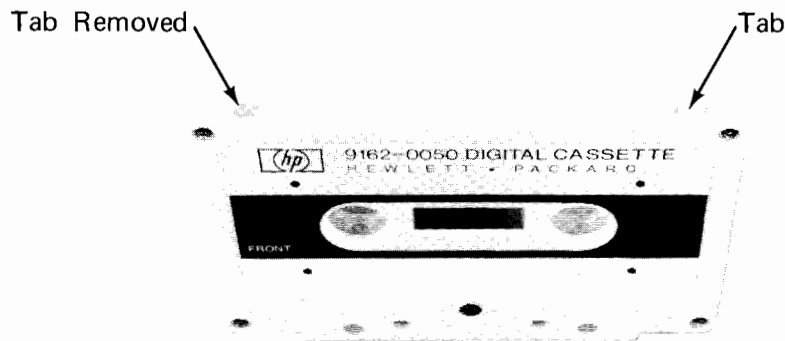


Figure 5-1. HP Tape Cassette

STORING CASSETTES

Since magnetic tapes are easily damaged, be sure to put each tape cassette in its plastic case when you have finished using it. Also, to keep the tape clean, be sure it is fully rewound (on clear-leader) before you remove it from the tape transport.

As with most magnetic tape products, the information recorded in the tape cassette can be altered or destroyed if it is exposed to a strong magnetic field, such as one produced by a bulk tape eraser, a toy magnet, or a metal detection device (like the ones used in many airports). If you keep your tape cassettes in a metal container, such as a card index box, they will be protected from most magnetic fields.

CLEANING THE TAPE HEAD

To ensure the reliability of tape cassette operations, it is recommended that the tape head be cleaned after every eight hours of cassette operations. Furthermore, it is always a good idea to clean the tape head before making important cassette recordings.

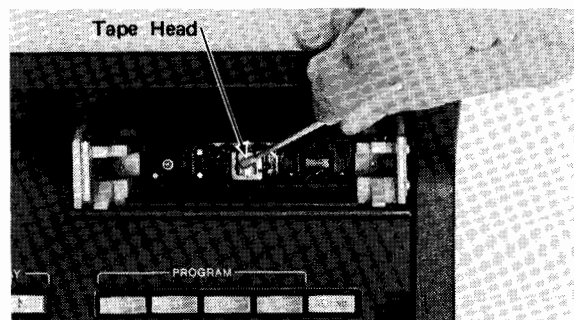


Figure 5-2. Cleaning the Tape Head

The tape head is easily cleaned as follows:

1. Open the transport door and remove the tape cassette.
2. Clean the tape head (see Figure 5-2) with a cotton applicator that has been dampened with head cleaning solution. Just wipe the top of the tape head a few times with the cotton applicator. Remove any other dust that has accumulated in the vicinity of the tape head.
3. Close the transport door. It's a good practice to keep the transport door closed whenever possible to prevent excess dust from accumulating in the transport.

TAPE FILE STRUCTURE

The tape is organized by files, which are established by the MARK command (MARK is discussed beginning on page 5-6). The first file on a tape is file 0; subsequent files are identified as file 1, file 2, etc. Both the number of files and the lengths of the files (in words) can be designated in a MARK command.

The tape structure is as follows:

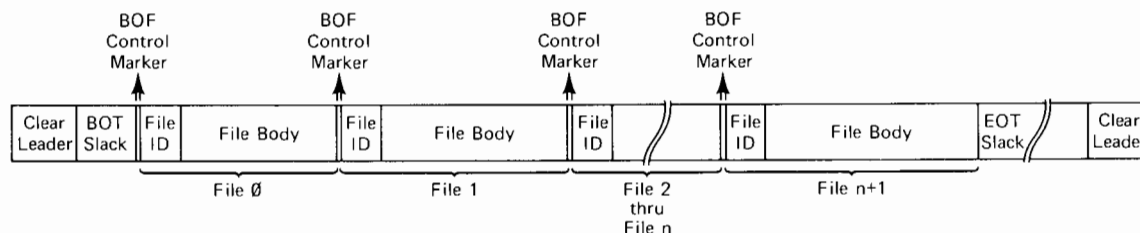


Figure 5-3. Tape Structure

- Clear-Leader:** Both the beginning and end of the tape have a clear-leader so that the calculator will know when the end of the tape is reached.
- BOT Slack:** The beginning of tape (BOT) has a small slack (unused) area to ensure that file 0 is read correctly during cassette operations.
- BOF Control Marker:** The beginning of each file (BOF) has a control marker. This control marker separates consecutive files.
- File ID:** The file identifier contains information like the file number, the file type (program, data, etc.), the absolute file size (in words), the current file size (number of words currently in use), etc. The 13 words used in the file ID are additional to, and separate from, the words specified by the user in the MARK command.
- File Body:** The file body is the portion of the file used to retain information. The absolute file body size is determined by the MARK command specifications.
- EOT Slack:** The end of tape (EOT) has an unused area the size of which depends on the number of files marked and the length of each file.

◆◆◆◆◆ CASSETTE COMMANDS ◆◆◆◆◆

The cassette commands are briefly described below:

- MARK — establishes files with specified lengths.
- STORE — reproduces, onto tape, programs that are in memory.
- LOAD — reproduces, into memory, programs that are on tape.
- LINK — works like LOAD but, in addition, it retains variables currently in memory.
- MERGE — inserts, between program lines currently in memory, program lines that are on tape.
- FIND — locates a specific tape file.
- REWIND — rewinds the tape to clear-leader.
- STORE DATA — reproduces, onto tape, data that is in memory.
- LOAD DATA — reproduces, into memory, data that is on tape.
- STORE KEY — reproduces, onto tape, information that is on Special Function keys (see Chapter 6).
- LOAD KEY — reproduces, into the Special Function keys, information that is on tape.
- LOAD BIN — reproduces, into memory, specially written programs that are on tape.
- TLIST — prints information about each file.

These commands are discussed individually beginning on page 5-6).

PROGRAMMABILITY ◆

All tape commands are programmable as well as being keyboard executable. The same syntax is used in either case. Of course, program statements are preceded by a line number and are entered into memory if the END OF LINE key is pressed; whereas keyboard commands are executed if the EXECUTE key is pressed.

Three cassette commands have dedicated keys that can be used when executing the commands; i.e., **STORE**, **LOAD**, **REWIND**. However, if any of these commands are to be used in a program, the commands must be keyed in, letter by letter.

SYNTAX ◆

The terminology shown below appears in the command syntaxes:

array name	— the letter used to define the array (A through Z);
file	— the number of the tape file;†
1st line number	— the first line number designated;
2nd line number	— the second line number designated (it can appear only if the first line number is designated);
length	— the length of the designated files;†
no. of files	— the number of files designated.†

†Can be a constant, a variable, or an expression.

The following conventions are also used:

- brackets [] – to indicate optional items;
 coloring – to indicate that the colored item must appear as shown.

Here's an example using the complex version of the STORE command. Once you understand this syntax, you should have no trouble with any of the syntaxes.

Syntax:

STORE file[, 1st line number[, 2nd line number]]

Let's look at the syntax, step-by-step, from left to right:

1. The word, STORE, is necessary to identify the command.
2. The 'file' number is needed to specify the file that will record the program.
3. The '1st line number' is optional; but if it is specified, then a comma is needed to separate the 'file' from the '1st line number'.
4. The '2nd line number' is optional, too; but for it to be specified, the '1st line number' must also be specified; if both are specified, then a comma is needed to separate the two items.

Since the brackets are nested in this command, for the most deeply nested item to be specified, all other items must be specified, too. If, however, the brackets had appeared as:

~~~~~ ~~~~~ [~~~~~<sup>1</sup>] [~~~~~<sup>2</sup>]

then this dependency between items would not exist; that is, the information within the second bracket could be specified without having the other bracketed information specified.

The syntax requirements for each command are shown individually in the tape command discussions and are shown all together on page 5-25.

## ◆◆◆◆◆◆◆◆◆◆ MARK ◆◆◆◆◆◆◆◆◆◆

The MARK command is used to establish tape files. Both the number of files to be established and the lengths of the files (in words) are specified in this command.

Syntax:

MARK no. of files , length


When the MARK command is executed, files are marked beginning at the tape's current location. If the tape is rewound, the marking begins at file 0; but if the tape is located at, say, file 3, then the marking begins at file 3.

The tape can be located at any file if the FIND command (see page 5-16) is used.

### MARKING NEW TAPES ◆

To mark a new tape, first be sure that the tape is rewound by pressing the key, REWIND. Then mark the number of files you want with the lengths that you want.

If you want, say, three files marked, each with 500 word lengths, press:



In about 30 seconds the symbol,  $\vdash$ , appears on the display, indicating that the operation is completed. File 0, file 1, and file 2 have now been marked. Each of these files can record information up to 500 words in length.

An extra file, file 3, is also marked. There are two reasons for the extra file:

- The BOF (beginning of file) control marker (see Figure 5-3, page 5-3) for each file serves as an EOF (end of file) control marker for the previous file.
- In a FIND command, the extra file can be accessed; so new files can be marked beginning at this point. (Had the extra file not been marked, another MARK command would have had to re-mark file 2.)

The extra file should not be used to record information, however, since any information in this file will be erased when more files are marked.


A new tape can also be marked with several files of varying lengths if successive MARK commands are used. First, be sure that the tape is rewound. Then to mark, say, two files with 300 word lengths, four files with 1000 word lengths, and one file with a 2500 word length, execute the following:

1. MARK 2,300: In about 30 seconds file 0, file 1, and the extra file (file 2) are marked. Then if you execute:
2. MARK 4,1000: In about 60 seconds file 2, file 3, file 4, file 5, and the extra file (file 6) are marked. This MARK command takes considerably longer to execute since much more tape is marked. Then if you execute:
3. MARK 1,2500:† In about 70 seconds file 6 and the extra file (file 7) are marked.

† Of course, the absolute size of a recording is limited by the memory size of the calculator; so, if the memory size of your calculator is 1760 words, it would be pointless to mark a file with a length of 2500 words.



The pictorial below illustrates these MARK commands:




**Figure 5-4. Marking Successive Files**

Notice that the extra file marked by each command is temporary, as indicated by the dotted file line. The extra file is replaced by a new file each time another MARK command is executed. In this case, file 7 is the remaining extra file. Additional MARK commands can be executed from this point.

### MARKING A USED TAPE

The MARK command is the same for both new and used tapes. But for a used tape, it is necessary to position the tape at the file where the marking is to begin. This is accomplished by using the FIND command (discussed on page 5-16).

If the tape is still marked as shown on Figure 5-4 in the previous section, file 5 is located if you press:



You can now mark files beginning at this point. If, however, you wish to retain any recorded information that is on file 5 or file 6, then a FIND 7 command is preferable. This locates the tape at the extra file, file 7; new files can be marked at this point without destroying any previously recorded information (unless you have made the mistake of recording on the extra file).

### NOTE

Whenever marking a used tape, begin marking at a point from which you do not need any of the previously recorded information. For the contents of all previously used files from this point onward will be either destroyed or altered (even if only a small portion of the tape is re-marked).

If you are uncertain of the number of marked files, the lengths of the files, the information in the files, etc., use the TLIST command as discussed on page 5-23, to identify your tape files.



## STORE

The STORE command is used to record, onto tape, programs that are in memory. The contents of memory are not altered by this command. If you want to record all program lines that are in mainline memory†, the syntax is simply:


STORE [file]

The file specification is optional; for if no file is specified, file  $\emptyset$  is assumed. Since file  $\emptyset$  is the most easily accessible file, it is often convenient to use file  $\emptyset$  as a 'scratch-pad' file.<sup>‡</sup>

So if you press:

  All program lines in memory are recorded in file 0.

Or if you press:

 All program lines in memory are recorded in file 5.

The **LOAD**, **LINK**, and **MERGE** commands (discussed later) also assume file 0 if no file is specified.

For more sophisticated applications, the syntax is:

STORE file [, 1st line number [, 2nd line number]]

1st line number: The first line number specified is the lowest-numbered line in memory that you want recorded. All higher-numbered lines are also recorded unless the 2nd line number is also specified.

2nd line number: The second line number specified is the highest-numbered line in memory that you want recorded. All lines between the specified line numbers are also recorded.

If the cassette is not protected (as discussed on page 5-1), a program can be stored in any file that has a length greater than or equal to the size of the program — in words.

When a program is stored into a tape file, everything previously in that file is erased.

## Examples

For the following examples, assume lines 10, 20, 30, . . . 100 are in memory. If so the following commands could be executed:

STORE 3: All program lines are recorded in file 3.

† The term, 'mainline memory', is used here to emphasize that programs on Special Function keys are not stored unless you are in the KEY mode (see page 6-7).

‡ A 'scratch-pad' file is used to retain temporary information.

STORE 5, 40: All program lines, beginning at line 40, are recorded in file 5. (To specify the 1st line number, you must also specify the file.)

STORE 0, 40: All program lines, beginning at line 40 are recorded in file 0. (Even though file 0 is used here, it must be designated since the 1st line number is designated.)

STORE 2, 20, 80: All program lines, from line 20 through line 80, are recorded in file 2. (To specify the 2nd line number, you must also specify the 1st line number.)

STORE X+3, 60: All program lines, beginning at line 60, are recorded in the file indicated by the expression, X+3. So if X=4, the program lines are recorded in file 7.

---

#### NOTE

Do not confuse the STORE key with the LOAD key. If, by mistake, you execute a LOAD command instead of STORE, you could erase the program in memory. Likewise, if, by mistake, you execute a STORE command instead of LOAD, you could erase the program on tape.

## LOAD


The LOAD command takes programs that are stored on tape and reproduces them into the calculator memory.

To replace the information in memory by the program lines in a specific file, you can use the following syntax:

LOAD [file]


The file specification is optional; if no file is specified, file Ø is assumed.

So if you press:



The program lines from file Ø are loaded into memory. Information previously in memory is erased.

Or if you press:



The program lines from file 4 are loaded into memory. Information previously in memory is erased.

For more sophisticated applications, the syntax is:

LOAD file [, 1st line number [, 2nd line number]]

Whenever the LOAD command is executed, all program lines in the specified tape file are reproduced into memory. All program lines previously in memory are erased unless the 1st line number is specified.

Whenever the 1st line number is specified, the reproduced program lines are renumbered with the beginning line number corresponding to the specified 1st line number. (The spacing between consecutive line numbers remains the same; furthermore, statements, like GO TO 30,† are appropriately renumbered.) Program lines previously in memory, with line numbers lower than the 1st line number, are retained; all other lines previously in memory are erased.



In the calculator mode (after the program is loaded into memory):

- If the 2nd line number is not specified, the calculator halts.
- If the 2nd line number is specified, program execution begins at this line number.

In the programming mode (in this case, specifically after the LOAD command is executed during program execution):

- If the 2nd line number is not specified, program execution is 'restarted' either with:
  - the program line immediately following the LOAD command in the original program, or with

† A GOTO statement in a tape file must refer to a line in the file for the renumbering to be successful; if the GOTO statement on tape refers to a program line currently in memory, an error will occur when the renumbering is attempted.

- the first line of the loaded program; that is, if there were no lines after the LOAD command in the original program, or if the lines were destroyed by the LOAD command.
- If the 2nd line number is specified, program execution is 'restarted'<sup>†</sup> with this line number.

### Examples

For the following examples, assume that lines 5, 15, 25, . . . 95 are originally in memory and that lines 10, 20, 30, . . . 100 are in file 4.

LOAD 4: The program lines from file 4 replace all the program lines previously in memory.

LOAD 4, 10: All program lines from file 4 are loaded into memory. The first line loaded into memory is assigned line number 10 and the other lines are appropriately renumbered (however, in this example, the first line loaded into memory was already line number 10 — so no renumbering is necessary). Only the program lines previously in memory, with line numbers lower than 10, are retained; so in this example, line 5 is retained. Therefore, the lines in memory would be: 5, 10, 20, 30, . . . 100.

LOAD 4, 30: This is like the previous example except that, in this case, the renumbering is necessary since '30' does not correspond to the first line loaded into memory. After this command is executed, the lines in memory are: 5, 15, 25, 30, 40, 50, . . . 120. Notice that lines 5, 15, and 25 are retained.

LOAD 4, 30, 5: This is like the previous example except that, in this case, after the command is executed, program execution begins at line 5.

The following examples use LOAD in the programming mode:

|    |           |           |
|----|-----------|-----------|
| #1 | in memory | in file 7 |
|    | 5 X=3     | 10 A=5    |
|    | 15 Y=4    | 20 B=6    |
|    | ⋮         | ⋮         |
|    | 95 LOAD 7 | 100 END   |

When line 95 is executed, the program in file 7 replaces all program lines previously in memory. The new program then begins execution at line 10.

|    |           |                                           |
|----|-----------|-------------------------------------------|
| #2 | in memory | in file 2                                 |
|    | 5 COM X,Y | 10 COM X,Y                                |
|    | 15 X=3    | 20 Z=SQR(X <sup>2</sup> +Y <sup>2</sup> ) |
|    | 25 Y=4    | 30 PRINT "Z="Z                            |
|    | ⋮         | ⋮                                         |
|    | 95 LOAD 2 | 100 END                                   |

This is like the previous example, except that both programs have a COM statement. So, even though the original program is replaced by the program in file 2, variables that are 'common' to both programs (via the COM statement) retain their current values.

<sup>†</sup> The term, 'restarted', is used here because, during program execution, the LOAD command functions as though — RUN EXECUTE — had been pressed: variables (except for those defined by COM) become undefined, operating modes like STANDARD and RAD (radians) are reset, etc.

# LOAD

(Continued)

| #3 | in memory    | in file 8 | after<br>LOAD command |
|----|--------------|-----------|-----------------------|
|    | 5 COM X,Y    | 10 Z=X+Y  | 5 COM X,Y             |
|    | 15 X=3       | 20 DISP Z | 10 Z=X+Y              |
|    | 25 Y=4       | :         | 20 DISP Z             |
|    | :            | :         | :                     |
|    | 95 LOAD 8,10 | 100 END   | 100 END               |

When line 95 is executed, the program from file 8 is loaded into memory beginning at line 10. The COM statement, line 5 in the original program, is retained since this line is numbered lower than line 10. Since the COM statement is retained, the values of the variables, X and Y, are also retained.

| #4 | in memory      | in file 4 | after<br>LOAD command |
|----|----------------|-----------|-----------------------|
|    | 5 D=6          | 10 M=5    | 5 D=6                 |
|    | 15 E=7         | 20 N=6    | 15 E=7                |
|    | 25 LOAD D-2,50 | :         | :                     |
|    | 35 D=3         | 100 END   | 45 E=E+1              |
|    | 45 E=E+1       |           | 50 M=5                |
|    | 55 P=1         |           | 60 N=6                |
|    | :              |           |                       |
|    | 95 END         |           | 140 END               |

When line 25 is executed, the entire program in file 4 is loaded into memory and renumbered beginning at line 50. All lines previously in memory that are numbered lower than line 50 are retained. Program execution is then restarted at line 35 since this line immediately follows the LOAD command. [In this example, however, error 40 (undefined variable) would occur in line 45 since the variable (E) no longer has the value assigned to it in line 15; the LINK command, described in the following section, could have been used here instead of LOAD.]

| #5 | in memory      | in file 6  | after<br>LOAD command |
|----|----------------|------------|-----------------------|
|    | 5 Q=7          | 10 S=Q+3+R | 5 Q=7                 |
|    | 15 R=8         | :          | 15 R=8                |
|    | 25 S=Q+3-R     | 90 GOTO 10 | 20 S=Q+3+R            |
|    | :              | 100 END    | :                     |
|    | 95 LOAD 6,20,5 |            | 100 GOTO 20           |
|    |                |            | 110 END               |

When line 95 is executed, the entire program in file 6 is loaded into memory and renumbered beginning at line 20. [Notice that the number referenced in the GOTO statement (line 90, file 6) is also appropriately renumbered.] Since lines 5 and 15 from the previous program are lower than line 20, they are retained. Program execution is then restarted at line 5.

---

If a COM statement is in the original program and if a LOAD command erases COM, the variables specified in COM can no longer be accessed; but a portion of memory is still

allocated to the 'common' variables. Then if another program, having COM, is loaded into memory, the 'common' variables are once again accessible.

### ———— Increasing Effective Calculator Memory ————

As shown in the previous examples, LOAD can be used to chain programs together, piece by piece. With a COM statement in each program segment, only the variable values needed in each program segment are retained, and the program lines in the previous segment can be erased. So a maximum of memory is always available. Therefore, it is possible to execute, a portion at a time, programs that would otherwise be too large to execute on the Model 30.

## ◆◆◆◆◆◆◆◆◆◆ LINK ◆◆◆◆◆◆◆◆◆◆

Like the LOAD command (see previous section), the LINK command takes programs that are stored on tape and reproduces them into the calculator memory.

LINK and LOAD have the following differences when executed:

- With LOAD, the values of variables not referenced in COM statements become undefined; whereas with LINK, all variable values are retained.
- With LOAD, the calculator reverts to normal operating modes, like RAD and STANDARD; whereas with LINK, the current operating modes, say, DEG and FIXED 2, are retained. (But the data pointer is reset with either LOAD or LINK — see DATA statement, page 3-18.)

The LINK syntaxes parallel the LOAD syntaxes:

LINK [file]  
or  
LINK file [, 1st line number [, 2nd line number] ]

The specifications in the LINK syntax follow the identical rules as the specifications in the LOAD syntax.

There is no key for the LINK command, so the word, LINK, must always be typed in. Since LINK is most useful in the programming mode, the following examples show its practical uses.



### ———— Examples ————

| #1 | in memory  | in file 2      |
|----|------------|----------------|
|    | 5 X=3      | 10 Z=Y↑2-X↑2   |
|    | 15 Y=4     | 20 PRINT X,Y,Z |
|    | 25 FIXED 3 | ⋮              |
|    | ⋮          | ⋮              |
|    | 95 LINK 2  | 100 END        |

When line 95 is executed, the program on file 2 replaces all program lines previously in memory. This program then continues execution with line 10. The variables, X and Y, defined in the original program, retain their values. Also, operating modes that were defined in the original program (like FIXED 3) are retained. Had LOAD been used instead of LINK, the variables, X and Y, would have been undefined; and the operating mode, FIXED 3, would have reverted to STANDARD.

(Continued)

## ◆◆◆◆◆◆◆◆◆◆ **LINK** ◆◆◆◆◆◆◆◆◆◆

(Continued)

| #2 | in memory                             | in file 0                                               | after<br>LINK command                                                               |
|----|---------------------------------------|---------------------------------------------------------|-------------------------------------------------------------------------------------|
|    | 5 Y=-1<br>15 Y=Y+1<br>25 LINK Y,30,30 | 30 R=16<br>40 T=EXP(R)<br>:<br>100 GOTO 15 <sup>†</sup> | 5 Y=-1<br>15 Y=Y+1<br>25 LINK Y,30,30<br>30 R=16<br>40 T=EXP(R)<br>:<br>100 GOTO 15 |

When line 25 is executed, the program in file 0 (since the variable, Y, equals 0) is linked to the existing program beginning at line 30. Program execution then continues at line 30. The last statement in this program, 100 GOTO 15, returns the program to line 15 where the variable (Y) is incremented by 1. When line 25 is again accessed, the program in file 1 will then be linked to the current program in memory.

<sup>†</sup> This statement is acceptable since renumbering does not occur in this example.

## ◆◆◆◆◆◆◆◆◆◆ **MERGE** ◆◆◆◆◆◆◆◆◆◆

The MERGE command takes program lines from a tape file and positions them in memory in front of the program currently there, between consecutive lines in the program currently there, or behind the program currently there.

The MERGE command always retains the program lines previously in memory.

The following simplified syntax can be used:

MERGE [file]

The file specification is optional; if no file is specified, file 0 is assumed.

### — Examples —

In these examples assume that the following six program lines are in memory:

10, 20, 80, 90, 100, 110

- If the program lines in file 7 are 30, 40, 50, 60, and 70, then the following command could be executed:

MERGE 7: This inserts program lines between lines 20 and 80 of the program currently in memory. Then the program lines in memory would be 10, 20, 30, ... 110.

- If the program lines in file 8 are 1, 2, 3, ... 9, then the following command could be executed:

MERGE 8: This inserts program lines in front of the program currently in memory. Then the program lines in memory would be 1, 2, 3, ... 9, 10, 20, 80, 90, 100, 110.



- If the program lines in file 9 are 115, 125, . . . 205, then the following command could be executed:  
MERGE 9: This inserts program lines behind the program currently in memory. Then the program lines in memory would be 10, 20, 80, 90, 100, 110, 115, 125, . . . 205.
- If the program lines in file 10 are 85, 95, 105, 115, the command — MERGE 10 — could not be executed since the line numbers in the two programs cannot be interwoven; any attempt to do so results in an error.
- If the program lines in file 11 are 20, 30, . . . 70, the command — MERGE 11 — could not be executed; for if any line number on the file matches a line number currently in the program (in this case, line number 20), an error occurs.



For more sophisticated applications, the syntax is:

MERGE file [, 1st line number [, 2nd line number]]

The syntax specifications are much like those for LOAD and LINK. If the 1st line number is specified, the program lines on the specified file are renumbered beginning with the 1st line number. The spacing between renumbered lines remains the same.

In the calculator mode:

- If the 2nd line number is not specified, the calculator halts after the program lines are merged.
- If the 2nd line number is specified, program execution begins at that line after the program lines are merged.

In the programming mode (that is, after the program lines are merged):

- If the 2nd line number is not specified, program execution is restarted<sup>†</sup> with the line immediately following the MERGE command.
- If the 2nd line number is specified, program execution is restarted<sup>†</sup> at that line.

### Examples

For the following examples, assume that the program lines currently in memory are 70, 80, 90, 100.

- If file 4 has lines 20, 30, . . . 70, the following command can be executed.  
MERGE 4, 10, 10: By specifying the 1st line number as 10, the program lines from file 4 are renumbered so that they will fit in front of the program lines currently in memory. Then the lines in memory are 10, 20, . . . 100. Since the 2nd line number is specified as 10, program execution begins at that line.
- If file 5 has lines 1, 2, . . . 100 and you want to insert these lines between lines 70 and 80 currently in memory, it would be necessary first to renumber the lines currently in memory to allow for a 100 line insertion. The command — REN 700,200 — achieves this and renumbers the lines in memory to 700, 900, 1100, 1300. So the MERGE command could then be — MERGE 5,750. The lines in memory would then be 700, 750, 751, 752, . . . 849, 900, 110, 1300.

<sup>†</sup> Restarting program execution means that although the program does not halt, the values of variables are erased and operating modes are reset.

## ◆◆◆◆◆◆◆◆◆◆ FIND ◆◆◆◆◆◆◆◆◆◆

The FIND command is used to locate a specified tape file. It has two primary functions:

- It is used with the MARK command to locate the tape file at which marking is to begin.
- It is used to locate the next tape file that is to be accessed. This can have considerable time savings in either the calculator or programming mode since other operations can still be performed while the FIND command is being executed.

The syntax is as follows:

FIND file

As soon as the FIND command begins execution, the tape searches forward until the first file ID is encountered. When it is encountered, both the direction and the number of files that the tape must travel are known. At this point, control of the calculator is regained by the user while the tape continues to search for the desired file. In the calculator mode, control is regained when the symbol '┌' appears on the display; whereas in the programming mode, control is regained when the program continues executing. (Incidentally, in the programming mode, if any other cassette command is encountered while the FIND command is still executing, the FIND command is immediately overridden by the new cassette command.)

### ————— Example —————

```

10 DEG
:
:
100 FIND 8
110 FOR X=0 TO 360
120 PRINT TAB(35+30*SINX)*"
130 NEXT X
:
:
200 LINK 8,10,10

```

When line 100, FIND 8, is executed, the tape cassette searches forward to determine its correct location. When the first file ID is found, the tape continues the search in high speed and the program continues execution at line 110. When line 200 is finally accessed, the tape is already positioned at file 8, so the LINK command can be immediately executed. (However, if file 8 had not already been located, the LINK command would have overridden the FIND command, continued the search, and performed the linking operation.)

 **REWIND** 

The REWIND command causes the cassette to rewind to clear-leader. However, any other cassette command immediately overrides the REWIND command.

All other cassette commands have their execution terminated if the STOP key is pressed. But the quickest way to terminate the REWIND command is to open the transport door.

The syntax is simply:

REWIND

In the calculator mode, the internal tape cassette is most easily rewound if you press the REWIND key. But in the programming mode, REWIND must be keyed in, letter by letter.

In the programming mode, the REWIND command can be specified after all other cassette commands to ensure that the tape is on clear-leader when the program is finished and the cassette is removed from the transport.



## ◆◆◆◆◆◆◆◆◆◆ STORE DATA ◆◆◆◆◆◆◆◆◆◆

The STORE DATA command takes data from memory and reproduces it onto tape. Data can be specified in either of two ways:

- If an array name (A through Z) is specified in the command, the value of each variable in the array is stored in a tape file.
- If no array name is specified in the command, the values of all variables defined in a COM statement are stored.<sup>†</sup> (From a COM statement, both simple and array variables can be stored.)

The syntax is:

STORE DATA file [, array]

As mentioned, if the array is not specified, the variables referenced in the COM statement are stored.

All variables stored need not have assigned values. For instance, a 20 element array — A(20) — could be stored on tape, while an element within the array, say, A(6), has no defined value.

The STORE DATA command can be executed in the calculator mode. But to do so generally requires either a COM or a DIM statement in memory and always requires that the calculator must have been previously initialized by either a RUN or an INITIALIZE command.

Here are two examples of using STORE DATA in the programming mode.

### ————— Examples —————

#1

```
1 COM A(20),B,B1
10 FOR I=1 TO 20
20 A(I)=I*2-2*I
30 NEXT I
40 INPUT B,B1
50 DISP "FILE NO.:"
60 INPUT Z
70 STORE DATA Z
80 END
```

#2

```
10 DIM A(6,6),B(30)
20 FOR J=1 TO 25
30 B(J)=LOGJ
40 NEXT J
50 STORE DATA 3,B
:
:
100 END
```

Example No. 1: In this example the STORE DATA command, line 70, references a variable file (Z), which is assigned a value in line 60. Since no array is specified by STORE DATA, all variables referenced in the COM statement are stored on the specified file.

Example No. 2: In this example the STORE DATA command, line 50, references file 3 and array B. So all the variables in the B array are stored in file 3. Notice that although B(1) through B(30) are all stored, B(26) through B(30) remain undefined.

<sup>†</sup> For those who have the 'String Variables ROM' — string variables can be stored only in this manner; that is, by being referenced in a COM statement.

The file specified by STORE DATA must be large enough to include the entire array even if many of the array variables do not have assigned values.

#### NOTE

In general, it is a good idea to mark file sizes larger than the information that is going into the files. This is especially true when storing data.

## LOAD DATA

The LOAD DATA command takes the data that was previously recorded in a file (with the STORE DATA command) and reproduces it into memory.

The syntax parallels the STORE DATA syntax:

LOAD DATA file [, array]

If an array is specified in the STORE DATA command, then the LOAD DATA command that subsequently accesses the same file must also specify an array (although the array name specified need not be the same as the one used in the STORE DATA command).

If no array is specified in the STORE DATA command, then the corresponding LOAD DATA command cannot specify an array. If STORE DATA did not specify an array, the variables from the COM statement were stored; so when the corresponding LOAD DATA statement is executed, a COM statement that parallels the previous COM statement should be in memory.

#### Examples

|    |                                                                                      |                                                                                                         |
|----|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| #1 | storing data                                                                         | (then after memory is erased)<br>loading data                                                           |
|    | <pre> 1 COM A,B,C[2] 2 A=54 3 B=16.8 4 C[1]=9 5 C[2]=7.3 6 STORE DATA 2 7 END </pre> | <pre> or { 1 COM A,B,C[2]       1 COM Q,T,V[2]       2 LOAD DATA 2       .       .       100 END </pre> |

Line 6, STORE DATA 2, in the original program stored the values of the variables specified in the COM statement. Since an array was not specified in this STORE DATA command, the subsequent LOAD DATA command cannot specify an array either.

Notice that the COM statement used for the LOAD DATA command need not specify the same variable names as the COM statement that is used with the corresponding STORE DATA command. But simple variables should correspond to simple variables, arrays should correspond to arrays of the same size, split-precision arrays should correspond to split-precision arrays, etc.

(Continued)

## LOAD DATA

(Continued)

#2

storing data

```

10 DIM A[30]
20 FOR I=1 TO 30
30 A[I]=6*SQR I
40 NEXT I
50 STORE DATA 5,A
60 END

```

(then after memory is erased)  
loading data

```

10 DIM A[30],G[30]
or { 20 LOAD DATA 5,A
    20 LOAD DATA 5,G
    .
    .
    100 END

```

Line 50 in the original program stored the elements of array A into file 5. Since an array was specified in this STORE DATA command, the subsequent LOAD DATA command must also specify an array. The array name specified by LOAD DATA need not be the same as the array name specified by STORE DATA; however, it must be dimensioned at least as large as the stored array.

### NOTE

If you have recorded data on a cassette using either an HP Model 10 or an HP Model 20 Calculator, you can load the data back into the Model 30 Calculator. Use the LOAD DATA command with the 'array' specification — and be sure that a COM or DIM statement in memory is large enough to assign variable names to all the data being entered. If the data was recorded using the Model 20, however, it will be loaded into the Model 30 in the reverse order.

 **STORE KEY** 

The STORE KEY command takes the information that is defined on all the Special Function keys (see Chapter 6), and reproduces this information onto tape.

Syntax:

STORE KEY file

Sometime later, after the information on the Special Function keys has been erased, the corresponding LOAD KEY command can be executed to put the information back on the Special Function keys.

 **LOAD KEY** 


The LOAD KEY command takes the information that was previously recorded in a file (with the STORE KEY command) and reproduces it onto the Special Function keys.

Each Special Function key can then perform the same operations that it previously did before being stored on tape; that is, a program, a function, or text previously defined on, say,  $f_9$ , is once again defined on  $f_9$ .

Syntax:

LOAD KEY file

If, say, the information on the 'BASIC' key overlay (supplied with the Model 30) is entered onto the Special Function keys as text, it can be reproduced onto tape with a STORE KEY command. Then anytime this information is needed, the corresponding LOAD KEY command can be executed.



 **LOAD BIN** 

The LOAD BIN (Load Binary) command reproduces into the calculator memory, from tape, binary information (assembly language programs). The assembly language program may be, for instance, a system diagnostic or an I/O subroutine.

The assembly language program cannot be listed or displayed, nor can it be stored onto tape by the user.

Syntax:

LOAD BIN file

**NOTE**

Files on cassettes are tagged as unused files, binary files, data files, program files, or key files. If an attempt is made to load from a particular file and the specified command incorrectly identifies the file tag, an error occurs. For example, executing the command, LOAD BIN 2, when file 2 is a data file, causes an error to occur.

TLIST

Beginning at the tape's current location, the TLIST command prints the information that is contained in subsequent file ID's (see Tape Structure, Figure 5-3).

Syntax:

TLIST

The information for each file is printed on one line. There are no column headers identifying the information in each line; the assumed headers and their explanations are as follows:

| File No. | File Type<br>(Code No.) | Absolute<br>File Size<br>(in words) | Current<br>File Size<br>(in words) | Program Line Nos.<br>(First) (Last) | Common<br>Area<br>(in words) |
|----------|-------------------------|-------------------------------------|------------------------------------|-------------------------------------|------------------------------|
|----------|-------------------------|-------------------------------------|------------------------------------|-------------------------------------|------------------------------|

1. File No:

The first column always specifies the file number.
2. File Type:

The five file types are coded as follows:

Ø for an unused file

1 for a binary file

2 for a data file

3 for a program file

4 for a key file.

Furthermore, if the file is secured, (see page 4-15) a '2' appears in front of the code number. For instance, the code for a secured program file is '23'. (Data files cannot be secured, however.)
3. Absolute File Size:

The length (in words) that the file was marked.
4. Current File Size:

The number of words currently being used.
5. First Program Line No :

For program files, this column displays the lowest line number on the file. But for data files, this column has another meaning. It is coded as follows:

Ø for a full-precision array


1 for a split-precision array

2 for an integer-precision array

3 for variables stored via the COM statement.
6. Last Program Line No:

For program files, this column displays the highest line number on the file. For any other file type, this column has no meaning.
7. Common Area:

For program files, this column displays the number of words of memory needed for the COM specifications. For any other file type, this column has no meaning.



## PERIPHERAL CASSETTES

Besides the tape transport built into the Model 30, up to nine peripheral cassette memories can be added to the Model 30.

The peripheral is referred to as the 9865A Cassette Memory. Four cassette memories can be connected directly to the calculator through the four I/O slots in the rear panel. If you have a 9868A I/O Expander, however, up to nine cassette memories can be added (this would still leave four I/O slots available for other peripherals).

If any of the peripheral cassette memories are used, all the commands previously discussed can still be used. But in order to specify which cassette is being accessed, the select code of the peripheral cassette must appear in the command immediately after the command name. For example, the following sample syntaxes can be used to specify a peripheral cassette:

```
STORE # select code [,file]
LOAD # select code , file [,1st line number[,2nd line number]]
FIND # select code, file
REWIND # select code
STORE DATA # select code, file [,array]
```

All cassette command syntaxes can be updated in this manner to specify a peripheral cassette. The number sign '#' is always required.

Peripheral cassette select codes are identified as #1 through #9. The internal tape transport has select code #10; if no select code is specified in a tape command, select code #10 is assumed.

## ◆◆◆◆◆ CASSETTE SYNTAXES ◆◆◆◆◆

### — Legend —

|                 |                                                                                                 |
|-----------------|-------------------------------------------------------------------------------------------------|
| brackets [ ]    | — items enclosed within brackets are optional.                                                  |
| coloring        | — colored items must appear as shown.                                                           |
| array name      | — the letter used to define the array (A through Z).                                            |
| file            | — the file number; can be a constant, a variable, or an expression.                             |
| 1st line number | — the first line number designated.                                                             |
| 2nd line number | — the second line number designated; it can appear only if the first line number is designated. |
| length          | — the files' lengths; can be a constant, a variable, or an expression.                          |
| no. of files    | — the number of files; can be a constant, a variable, or an expression.                         |

#### FIND file

Locates a specific tape file.

LINK [file] or LINK file [, 1st line number [, 2nd line number]]

Works like LOAD but, in addition, it retains variables currently in memory.

LOAD [file] or LOAD file [, 1st line number [, 2nd line number]]

Reproduces, into memory, programs that are on tape via STORE.

#### LOAD BIN file

Reproduces, into memory, assembly language programs that are on tape.

LOAD DATA file [, array]

Reproduces, into memory, data that is on tape via STORE DATA.

#### LOAD KEY file

Reproduces, into the Special Function keys, information that is on tape via STORE KEY.

MARK no. of files , length

Establishes files with specified lengths.

MERGE [file] or MERGE file [, 1st line number [, 2nd line number]]

Inserts, between program lines in memory, program lines that are on tape via STORE.

#### REWIND

Rewinds the tape to clear-leader.

STORE [file] or STORE file [, 1st line number [, 2nd line number]]

Reproduces, onto tape, programs that are in memory.

STORE DATA file [, array]

Reproduces, onto tape, data that is in memory.

#### STORE KEY file

Reproduces, onto tape, information that is on the Special Function keys.

#### TLIST

Prints information about each file.

**6-0**



## **NOTES**

## Chapter 6

# SPECIAL FUNCTION KEYS

The Special Function keys, located in the upper left-hand portion of the keyboard, add considerable flexibility to the Model 30.

There are 10 keys, labeled  $f_0$  through  $f_9$ , in this region. There are, however, effectively 20 accessible Special Function keys since each key can be accessed normally or with the SHIFT key held down.<sup>†</sup>

The Special Function keys can be used effectively in three ways:

- To represent text (where text can be used as a typing aid).
- To represent either single-line or multiple-line functions.
- To represent programs.

These three uses will be discussed individually after a brief introduction to entering and exiting the Special Function mode (referred to hereafter as the 'KEY mode').

### ◆◆◆ ENTERING AND EXITING KEY MODE ◆◆◆

To put information on a Special Function key, it is necessary first to enter the KEY mode by pressing:

[FETCH]  $f_x$  ‡

If there is no information on the key, the display will now be:

KEYF

Whenever you are in the KEY mode and you press the CLEAR key, this same display will appear.

While in the KEY mode, you can input as discussed in the following sections.

To exit the KEY mode, merely press the END key. Often, the KEY mode is automatically exited when certain operations are performed. These operations are also discussed in the following sections.

ENTERING AND  
EXITING KEY MODE


<sup>†</sup> We will refer to all 20 keys as  $f_0$  through  $f_{19}$ :  $f_0$  through  $f_9$  in the normal mode, and  $f_{10}$  through  $f_{19}$  in the shifted mode.

<sup>‡</sup> The particular key specified ( $f_0$  through  $f_{19}$ ) is the one accessed by the command. Any time  $f_x$  is referred to in this text, any of the twenty keys can be specified.

## ◆◆◆◆◆ KEYS AS TEXT ◆◆◆◆◆

A Special Function key can be used as a typing aid, as illustrated in the following example:

### ————— Example —————

First a key, say , is accessed by the method previously shown:

If no information is on the key, — KEY — appears on the display. Then text can be entered if an asterisk (\*) is keyed in first. If you plan to write a program with several PRINT statements, you can key in:

The END OF LINE key is necessary to complete the entry. After it is pressed, the KEY mode is automatically exited.

Even if information is already on the key, the method just discussed can be used. But, when the END OF LINE key is pressed, everything previously on the key is erased.

Once the key is defined as text, the text is immediately accessible. If you are writing a program and you want line 55 to be a PRINT statement, press:

and the display is:



Then the rest of line 55 can be keyed in normally.



Notice, anything already on the display is retained when the typing-aid key is pressed.

Any Special Function key can be used in the manner just described.

The text that is on a Special Function key can be a command; e.g.,

Then whenever you want to execute this command, you can press:


However, it would be more convenient if this were an 'immediate execute' command. If an asterisk both precedes and follows the command, it is immediately executable. For example, press:

and the display is:

\*LIST1,30†

This text can be edited to include the asterisk immediately after the text. Just press:



and the line now in memory is: \*LIST1,30\*

Then whenever you want to execute this command, just press:





## KEYS AS FUNCTIONS

A Special Function key can be used to store either single-line or multiple-line functions. (Single-line and multiple-line functions are discussed beginning on page 3-32.)


To put a single-line function on a key, the function must be entered as a program line, as shown in the following example:

### Example

First a key, say , is accessed normally:




If there are program lines already on this key, they can be easily deleted if you press:



(If there is text on the key, it is automatically deleted when the first program line is entered.)

A DEFFN statement can then be input. It must be the lowest-numbered program line on that key. For example, key in:

1 D E F F N A ( X ) = X ↑ 3 - X 

Then to evaluate this function for a particular value of X, say 3, first press the appropriate key:†



(continued)

† It doesn't matter whether or not you are in KEY mode when you perform this operation. You could have previously exited from KEY mode if you had pressed the END key.

## ◆◆◆◆◆ KEYS AS FUNCTIONS ◆◆◆◆◆

(continued)

The function name is immediately displayed:

FNA

Solving for FNA3 is then accomplished merely by keying in the 3 and pressing the EXECUTE key.

In this example the result, 24, would then be displayed.

After the function is evaluated, the KEY mode is immediately exited.

In the previous example, the function could also be called by a program that is being run. If the program is in mainline memory and the function, FNA, is called, the calculator first searches mainline memory to see if the function is defined there; if it is not, the calculator then searches the first line of each Special Function key (in the order in which they were defined) to see if the function is defined on a key. If the program that calls the function is on a key, the calculator first searches each line of that program to see if the function is defined there; if it is not, the calculator then searches the first line of each Special Function key (in the order in which they were defined); finally the calculator searches mainline memory. Hence, it is possible for a function to be defined in more than one place. Then if a program calls on the function, the particular function called depends on the order of the search.

Multiple-line functions can be on a key, also. As in single-line functions, just be sure that the DEFFN statement is the lowest-numbered statement on the key. By doing so, when the key is pressed, the function name appears on the display; then the function can be immediately evaluated.


## ◆◆◆◆◆ KEYS AS PROGRAMS ◆◆◆◆◆

A Special Function key can contain an entire program. The program can be keyed in just like any other program once the specified key is accessed. Automatic line numbering can be used, the editing keys can be used, etc.

Only the COM statement is restricted. If COM is used and if COM was previously specified in mainline memory, the number of elements specified by COM in the KEY mode can be no greater than the number specified in mainline memory — for there is only one common area allocated in memory.

After a program is entered into a particular key, the KEY mode can be immediately exited if the END key is pressed.

A program on a specified key can be run if you press:



The KEY mode is exited if the program is terminated by an END statement.

Often it is more convenient to perform a 'continue' operation on a program in the KEY mode. This is done simply by pressing the appropriate .

In this case, no additional array variable storage is allocated, no variable values are erased, etc. So if just the key is pressed, the program executes as though a CONT command had been given.

The following example shows a simple application for using Special Function keys in this way:

### Example

If the following program is in mainline memory:

#### Mainline Memory

```
10 Z=0
20 INPUT N
30 FOR I=1 TO N
40 INPUT A
50 Z=A+Z
60 NEXT I
70 END
```



and the following two programs are on keys,  $f_5$  and  $f_6$ , respectively:

$f_5$


```
10 PRINT "THE TOTAL IS"Z
20 END
```

$f_6$

```
10 PRINT "THE AVERAGE IS"Z/N
20 END
```

When the program in mainline memory is run and line 20 is accessed, the number of entries to be keyed in must be specified. Then each time the program loops, another input is accepted. After the program is completed, the user can press  $f_5$  to determine the total of the inputs and the user can press  $f_6$  to determine the average of the inputs.

In this example, if either of the following were pressed instead:



an error would occur since the RUN command erases variable values specified in a previous program, in this case, Z and N, whose values are needed for the Special Function programs.

If the program in mainline memory is run and the following entries are executed each time a ? appears:

8    93   82   88   75   68   94   97   77  
└──────────────────────────┘  
the 8 entries

← indicating the number of entries

When the program halts:

- If you press  $f_5$ , the printout is:

```
THE TOTAL IS 674
```

- If you press  $f_6$ , the printout is:

```
THE AVERAGE IS 84.25
```

## ◆◆◆ ADDITIONAL KEY OPERATIONS ◆◆◆

### KEYBOARD COMMANDS

If you are in KEY mode, located at a specified key that contains a program, in general, operations can be performed the same as in normal mode:

to run the program.

to display line 25.

to list all program lines, beginning at line 15.

Other commands, such as REN and DEL, can also be used in this manner.

To erase all information on the keys, press:

which only erases information on keys.

erases everything on the keys — of course, it also erases everything else in memory.

Whether or not you are in KEY mode, the following command does not erase programs or text on keys.

Of course, this command does erase all programs in mainline memory. Furthermore, it does erase all variables defined in the calculator.



Some commands, however, can be directed at a particular key, whether it is a program, a function, or a typing-aid key.

where only the specified key is erased.

where everything on the specified key is listed.


## CASSETTE COMMANDS

The tape cassette commands were discussed in Chapter 5. However, those commands that can be used with the Special Function keys are mentioned here, also. (In these examples, file 5 is arbitrarily selected.)




To load information into memory with a LOAD KEY command, the information must have been previously stored with a STORE KEY command.

A program on a particular key can be stored in a file, too. First, access the key with a FETCH command. Then use a STORE command to put it in a file.



To load this program back on a key at some later time, press:



Once a key is accessed, other tape commands, like LINK and MERGE, can be used in this manner.

## KEY OVERLAYS

Three overlays are supplied for the Special Function keys. They are easily inserted over the Special Function keys if you lock the extended tab on the right into the appropriate keyboard slot. Then press the overlay down over the keys and secure it with the left tab lock.

Two of these overlays, BASIC and MATH, have words pre-printed corresponding to specified keys. If desired, each pre-printed word can be keyed into the appropriate  $f_x$  as a typing-aid key. Then the STORE KEY command can be used to retain all the information on tape for easy accessibility. The third overlay, SPECIAL FUNCTIONS, can be labeled any way you want.

**A-0**



**NOTES**

## APPENDIX A

### CALCULATOR AND PRINTER INSTALLATION PROCEDURES

This appendix contains inspection, installation, and maintenance procedures for your calculator and printer.

---

#### THE CALCULATOR

---

---

##### INSPECTION PROCEDURE

The various parts of your calculator system were carefully inspected before they were shipped to you. All equipment should, therefore, be free of scratches and should operate properly. Carefully inspect the calculator, plug-in ROM's, peripheral equipment, cables, etc., for physical damage sustained in transit. Notify HP and file a claim with the carrier if there is any such damage.

Please check to ensure that you have received all of the items which you ordered and that any options specified on your order have been installed in your calculator. Decals located inside the ROM door (see Figure C-1) show the option number of any internal option installed in the calculator. Also check to ensure that all accessories are present (refer to 'Equipment Supplied' in Appendix B).

If you wish to check the operation of your system, or any part of it, refer to the System Test Instructions book, which contains the information needed to run the System Test Cassette. Before running the test, however, be certain that your calculator is properly installed.

If you have any difficulties with your system, if it is not operating properly, or if any items are missing, please contact your nearest HP Sales and Service Office; addresses are supplied at the back of this book.

---

##### POWER REQUIREMENTS

The Model 9830A Calculator has the following power requirements:


- **Line Voltage:** The calculator operates from nominal powerline voltages of 100, 120, 220, and 240 ac volts. The range of operation is from -10% to +5% of each nominal voltage. Two switches on the rear panel of the calculator enable any one of the four voltages to be selected (refer to page A-3, Initial Turn-on).
- **Line Frequency:** The calculator can be operated with any line frequency from 48 Hz to 66 Hz (nominally 50 Hz and 60 Hz).
- **Power Consumption:** With no peripheral equipment connected, the calculator requires a maximum of 150 voltamps.

## THE CALCULATOR

(Continued)

### POWER OUTLETS

There are two power outlets on the rear panel of the calculator (see Figure A-1). These are used to supply ac power to peripheral equipment. No more than a combined total of 610 voltamps must be drawn from these two outlets. The outlets are 'live' whenever the calculator is plugged in; they are not switched on or off by the LINE ON/OFF switch on the front of the calculator.

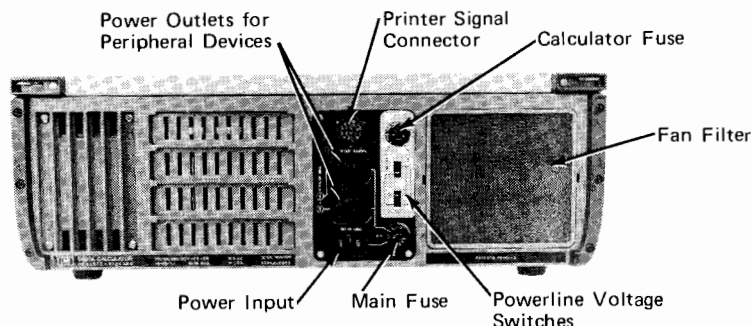

**Figure A-1. The Rear Panel**

### GROUNDING REQUIREMENTS

To protect operating personnel, the National Electrical Manufacturers' Association (NEMA) recommends that the calculator keyboard and cabinet be grounded. The calculator is equipped with a three-conductor power cable which, when connected to an appropriate power receptacle, grounds the keyboard and cabinet of the calculator. To preserve this protection feature, do not operate the calculator from an ac power outlet with no ground connection.

### FUSES

The calculator has two fuses, which are located on the rear panel (see Figure A-1).

The main fuse is a 6-amp fuse. It protects the calculator and any peripheral devices connected to the two power outlets on the rear of the calculator.

The calculator fuse is either a 2-amp fuse for 100 or 120 ac volt operation, or a 1-amp fuse for 220 or 240 ac volt operation. This fuse protects the calculator only.

#### WARNING

**TO AVOID THE POSSIBILITY OF SERIOUS INJURY, ALWAYS DISCONNECT THE CALCULATOR FROM ITS POWER SOURCE BEFORE CHANGING A FUSE.**


To change a fuse, first disconnect the power cable from the calculator. Next, press inward on the fuse-holder cap while twisting the cap in the direction indicated by the arrow on the cap. Withdraw the cap and fuse from the fuse-holder and remove the fuse from the cap. Insert the replacement fuse (either end) into the cap; then put the fuse and cap back into the fuse-holder. Press on the cap and twist it in the direction opposite to that indicated by the arrow until the cap is properly locked into place.

---

**INITIAL TURN-ON**

With the calculator disconnected from its ac power source, verify that the correct calculator fuse has been installed for the powerline voltage in your area (refer to the previous section, Fuses).

Next, ensure that the two switches on the rear panel are set for the correct powerline voltage. Figure A-1 shows the location of the switches and Figure A-2 shows the correct settings for each nominal line voltage. If it is necessary to alter the setting of either switch, insert the tip of any small instrument into the white slot on the switch. Slide the switch so that the position of the white slot corresponds to the desired voltage, as shown in Figure A-2.

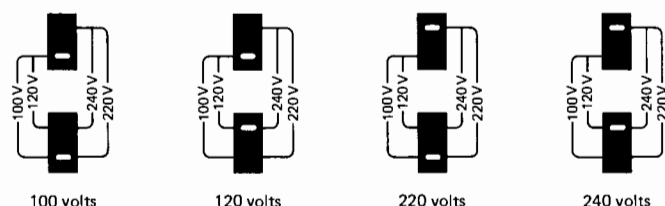

**Figure A-2. Switch Settings for the Nominal Powerline Voltages**

Switch the OFF/ON switch, located on the right front of the calculator, to the OFF position.

Connect the power cord to the power input connector (Figure A-1) at the rear of the calculator; plug the other end of the power cord into a suitable ac power outlet.

Switch the OFF/ON switch to the ON position; the symbol '⎓' will appear in the display indicating that the calculator is ready to operate.

---

**CLEANING THE CALCULATOR**

The calculator can be cleaned with a soft cloth dampened either in clean water or in water containing a mild detergent. Do not use an excessively wet cloth nor allow water to penetrate inside the calculator. Also, do not use any abrasive cleaners, especially on the display window.

The fan filter (Figure A-1) should normally be cleaned about every three months. To clean the filter, first turn the calculator off. Then remove the filter by prying it out with an instrument, such as a screwdriver; this is done by inserting the instrument into one of the slots on either side of the filter, and by prying the filter out from the rear panel. Clean the filter either by holding it under running water, or by washing it in warm, soapy water, followed by rinsing it in clean water. Dry the filter thoroughly. Finally, install it again by snapping one side back into place, and then the other.

If you have the 9866A Printer, follow the same cleaning procedure.

## PRIMARY PRINTERS

The 'primary printer' with the Model 30 is the printer which is set to select code 15. The HP 9866A Printer (Option 30) was designed specifically to be the primary printer for the Model 30. So the procedure to connect this printer to the calculator is included in this appendix, and operating information is in Appendix F.

However, there are other printers that can be used as the primary printer. Although each of these printers has some unique requirements and features, all of them are controlled by the same statements as is the 9866A Printer. Two of these printers will be referred to in this book since they are representative of the types of printers that are available. The two printers chosen are the HP 9861A Output Typewriter and the Teletype Model 38 ASR Data Terminal (teleprinter).

Any printer other than the 9866A Printer requires an interface to connect it to the calculator. The typewriter is supplied with its own special interface. The teleprinter must be interfaced by means of the HP 11205A Serial I/O Interface; this is a general purpose interface used to connect, to the calculator, devices that meet EIA Standard RS-232-C.

Installation procedures for the typewriter and teleprinter can be found in the manuals supplied with them and in the manuals for the interfacing equipment. Operating information is included in Appendix F of this book.

### NOTE

The 9861A Output Typewriter manual states that a calculator requires a ROM to control the typewriter. Despite that statement, no ROM is required to operate the typewriter as either the primary or as the secondary printer with the Model 30.

## THE 9866A PRINTER

### DESCRIPTION

The -hp- 9866A Printer is a high speed, thermal line-printer capable of printing up to 240 lines per minute with up to 80 characters per line. The Option 30 version of the printer connects directly to the 9830A Calculator and requires no special equipment to operate. The casing of the printer is designed to be placed either on any flat surface or on top of the calculator, as shown in the photograph on the title page of this book.


General information about the printer — accessories, power requirements, turn-on procedure, ordering printer paper, etc. — is included in the Peripheral Manual (-hp- Part No. 09866-90000) supplied with the printer. Some of the information is also included here for your convenience. However, for complete information about your printer, please refer to the Peripheral Manual.

## INSTALLATION AND TURN-ON

- **Power Requirements:** The 9866A Printer has the same power requirements as the calculator, except that the printer has a maximum power consumption of 250 voltamps (refer to page A-1, Power Requirements).
- **Grounding Requirements:** Grounding for the printer is similar to grounding for the calculator. If the calculator is properly grounded, as described earlier in this appendix, use the inter-instrument power cord (-hp- Part No. 8120-1575) supplied with Option 30 printers to ensure that the printer is also properly grounded.
- **Fuses:** The printer uses a 3-amp fuse for 100 or 120V operation or a 1.5-amp fuse for the 220 or 240V operation. If your printer is being turned on for the first time, ensure that the correct fuse is installed (refer to page A-2, Fuses).

Before connecting the printer to the calculator, ensure that the correct fuse is installed and that the slide switches on the rear of the printer are properly set for the voltage in your area. Once the calculator switches have been properly set, the printer switches should be set to the same positions (see Figure A-2).

Set the printer LINE switch to the OFF position. Then place the printer on top of the calculator and make the power and signal connections as shown in Figure A-3. The connectors on both ends of the interface cable are keyed for proper insertion into the sockets on the printer and calculator; both connectors are identical. To connect the cable, press the connector against the socket and slowly rotate the connector until you feel it align with the socket. Then twist the knurled sleeve on the connector clockwise to lock the connector and socket together. (Twisting the knurled sleeve counter-clockwise unlocks the connector.) The calculator and printer are now ready to operate. Set the LINE switches on the calculator and printer to the ON position.

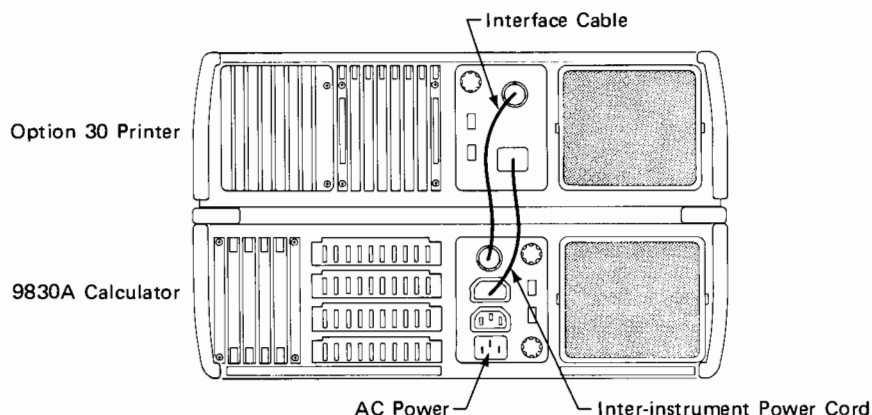

**Figure A-3. Connecting the 9866A Printer**

## LOADING PRINTER PAPER

The LOAD light, below the PAPER key, lights any time the printer is out of paper. To load paper, lift the lid and refer to the diagram underneath it to see how paper is loaded. Place the roll, with the free end as shown, into the printer. Then press the PAPER key until the paper emerges from the front of the printer.

**B-0**



## **NOTES**

## APPENDIX B

### GENERAL OWNER'S INFORMATION



The information in this appendix should be read soon after the arrival of your calculator.

#### EQUIPMENT SUPPLIED

The following items are packaged with your calculator:

- The items listed in Table B-1, which are included with every Model 9830A Calculator;
- Two copies of either a manual or an operating note for the options installed in your calculator (except for the memory options, see page B-2);
- Any additional items listed in any extra manuals or operating notes.

Plug-in ROM's and peripheral devices are packaged separately; each of these has its own manual or operating note and may also have extra items packaged with it.

**Table B-1. Standard Accessories Supplied**

| Item                                 | Quantity | -hp- Part Number                   |
|--------------------------------------|----------|------------------------------------|
| Simplified Operating Instructions    | 2        | 09830-90000                        |
| Operating and Programming Manual     | 2        | 09830-90001                        |
| 9830A Program Pad                    | 1        | 09830-90016                        |
| 98300A Math Pac, Vol 1; consists of: |          |                                    |
| 9830A Math Pac, Vol. 1               | 2        | 09830-70000                        |
| Tape Cassette — Math Pac 1           | 1        | 98300-60001                        |
| Tape Cassette — Blank                | 1        | 9162-0050                          |
| Sheet of Math Overlays (1-6)         | 1        | 7120-3511                          |
| Sheet of Math Overlays (7-9)         | 1        | 7120-3514                          |
| Key Overlays:                        |          |                                    |
| Special Functions                    | 1        | 7120-3053                          |
| Basic                                | 1        | 7120-3054                          |
| Math                                 | 1        | 7120-3055                          |
| System Test Cassette                 | 1        | 09830-90031                        |
| System Test Instructions             | 1        | 09830-90032                        |
| Tape Cassette — Blank                | 2        | 9162-0050                          |
| Power Cord                           | 1        | One of numbers shown in Figure B-1 |
| ROM Door Key                         | 2        | 5040-7437                          |
| Dust Cover                           | 1        | 4040-0978                          |
| Magnetic Head Cleaner                | 1        | 8500-1251                          |
| Cotton Applicators                   | 10       | †                                  |
| Spare Fuses — 250V Normal-blow       |          |                                    |
| ¼ in. dia. X 1¼ in. lg.              |          |                                    |
| 1-amp                                | 2        | 2110-0001                          |
| 2-amp                                | 2        | 2110-0002                          |
| 6-amp                                | 2        | 2110-0056                          |

† A package of 100 cotton applicators can be ordered under part number 5080-5400.

## **EQUIPMENT SUPPLIED**

(Continued)

Power cords with different plugs are available for the calculator. Each plug, together with the part number of the power cord which has that plug, is shown in Figure B-1. Each plug has a ground connector. The cord packaged with each calculator depends upon where that calculator is to be delivered. If your calculator has the wrong power cord for your area, please contact your local -hp- Sales and Service Office.

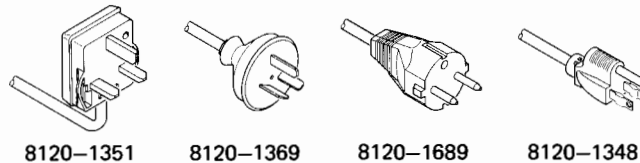


Figure B-1. Power Cords

## **SERVICE CONTRACTS**

Service contracts are available for all -hp- calculators and calculator-related equipment. For further information contact any -hp- Sales and Service Office.

## **PROGRAM PACS**

Program pacs containing programmed solutions to problems from many disciplines are available. A Math Pac is supplied with each calculator. For a complete list of pacs and for pricing information, please contact any -hp- Sales Office.

## **KEYBOARD MAGAZINE**

'Keyboard' is a periodical magazine containing general information about Hewlett-Packard calculators and related equipment. It includes articles and programs written by calculator users; descriptions of the latest equipment and program pacs; programming tips; and many other items of general interest to calculator users.

To receive your free subscription to 'Keyboard', please complete the order form supplied with your calculator. This will ensure that your name is added to the mailing list for 'Keyboard'. (Don't forget to tear off, and keep, the warranty statement at the bottom of the order form.)

## **MEMORY OPTIONS**

The size of the memory in the basic calculator is 1760 (16-bit, 2-byte) words. A calculator with Option 275 installed has a total memory size of 3808 words. If your calculator has the basic memory and you wish to add the extra memory, please order the 11275F Additional Memory Field Kit; our service personnel will then install Option 275 for you.

## OPTIONAL EQUIPMENT

Various optional devices are available to increase the computing power of your calculator and the versatility of your system.

These options consist of the ROM's (described in Appendix C), which are additions to the calculator, and the peripheral devices (listed in Table B-2), which are additions to the system. Interfacing equipment is available to enable you to connect your calculator to non-calculator-dedicated devices, such as teleprinters and measuring instruments.

Following is a list of peripheral equipment (dedicated to the 9800 Series Calculator System) available at the beginning of 1973. As new equipment becomes available after that date, it will be described in the 'Keyboard' magazine and in data sheets available from HP Sales and Service Offices.


**Table B-2. 9800 Series Calculator Peripherals**

|                          |                             |
|--------------------------|-----------------------------|
| 9860A Marked Card Reader | 9865A Cassette Memory       |
| 9861A Output Typewriter  | 9866A Printer               |
| 9862A Calculator Plotter | 9868A I/O Expander          |
| 9863A Paper-Tape Reader  | 9869A Hopper Card Reader    |
| 9864A Digitizer          | (available in summer, 1973) |

## CONNECTING PERIPHERAL DEVICES

Except for the 9866A Printer, which is described in Appendix A, peripheral devices connect to the calculator by means of an I/O (Input/Output) card. An I/O card can be inserted into any of the four slots at the back of the calculator (or into the 9868A I/O Expander if it is used), as shown in Figure B-2. The card is constructed so that it cannot be inserted upside-down.

One of Four I/O Slots with Spring Loaded Door

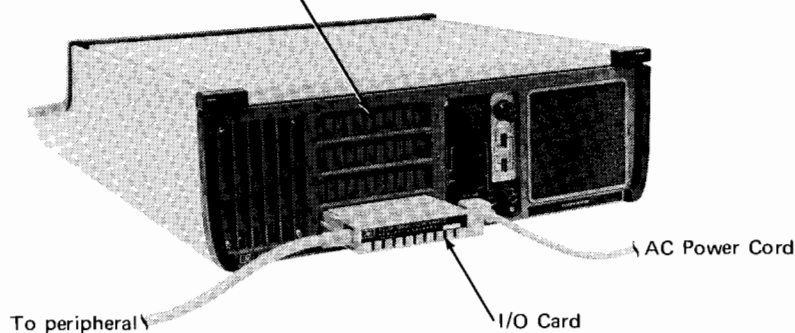

**Figure B-2. Connecting an I/O Card**

Before connecting an I/O card, make sure that the calculator and peripherals are switched off. Slide the card as far as it will go (about 3-3/4 inches) into any slot. Then press the card firmly into place, to ensure that it is properly connected to the calculator.

**C-0**



## **NOTES**

## APPENDIX C

### ROM OPTIONS

This appendix describes general ROM information and specifically describes the ROM's that are available with the Model 30.

#### GENERAL DESCRIPTION

ROM (Read-Only-Memory) differs from user memory in that information stored in a ROM is fixed. You cannot 'write' into a ROM in the same way, for instance, that you can write program lines into user memory.

Several optional ROM's are available for use with the Model 30. Each ROM consists of a block of memory (additional to the memory already built into the calculator) dedicated to performing specific tasks — controlling the plotter, enabling matrix and string variable manipulation, and so on. A list of ROM's is included in this appendix.

A ROM can be purchased in either one of two forms: as an accessory plug-in ROM or as an internal modification to the calculator. The calculator is capable of holding up to eight ROM's at one time; any combination of up to five plug-in ROM's and up to three internal ROM's can be installed.

The plug-in version of a ROM is a small block, about the same size as a tape cassette, which plugs into any one of the five slots behind the ROM door (see Figure C-1). You can install or remove a plug-in ROM in seconds.

The internal ROM requires a modification to the calculator, which must be made by qualified HP personnel. Whenever an internal ROM is added to a calculator, an identifying decal (showing the option number of the modification) is attached to the inside of the ROM door, so that you can readily determine which internal ROM's are installed in your calculator.

Operation of either the plug-in or the internal version of the ROM is identical once it has been installed. Which version of a ROM you choose to order is, therefore, entirely a matter of your convenience. However, please remember that no more than three internal ROM's can be installed, while up to five plug-in ROM's can be inserted at any one time.

#### INSTALLING A PLUG-IN ROM

The plug-in ROM's are installed in the slots behind the ROM door, as shown in Figure C-1. A ROM can be plugged into any slot.

Switch the calculator off and open the door by pressing on the ribbed part of the door. If the door is locked, use the key (shown in the figure) to unlock it; the key turns about  $\frac{1}{4}$  of a turn.

Slide the block, with the label 'right-side-up', into any slot. Press the block firmly into place, to ensure that it is properly connected to the calculator. Close the door.

(Continued)

## ◆◆◆◆◆ **INSTALLING A PLUG-IN ROM** ◆◆◆◆◆

(Continued)

The door is spring-loaded so it is not necessary to lock it, unless you prefer to do so for security, or other reasons.

Turn on the calculator, and the ROM is operational.

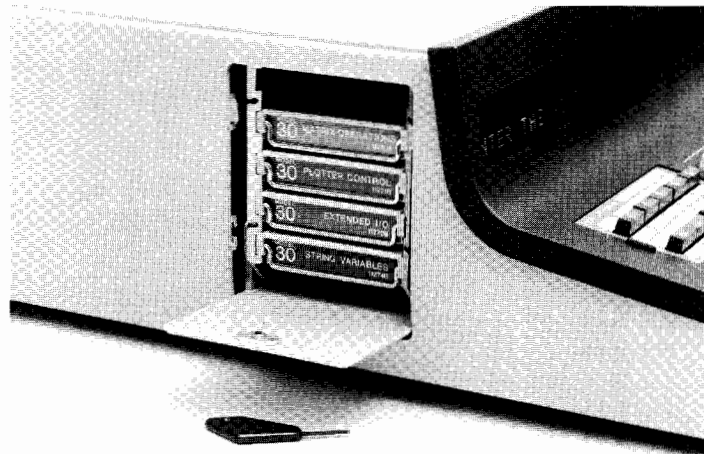


Figure C-1. Plug-In ROM's

## ◆◆◆◆◆ **HOW TO ORDER A ROM** ◆◆◆◆◆

To ensure that you receive the version of the ROM that you want, please order using the appropriate number, as described below. The different numbers for each ROM are given in the following section.

- To order a plug-in version of a ROM:

Quote the accessory number. This consists of five digits followed by the letter 'B'.

Example:

11271B Plotter Control ROM

- To order an internal version of a ROM at the same time that you order your calculator:

Quote the option number. This consists of the last three numerical digits of the accessory number given to the plug-in version of the ROM.

Example:

Option 271 Plotter Control ROM

- To order an internal version of a ROM after you have received your calculator:

Quote the field kit number. This is the same as the accessory number except that it uses the letter 'F' (for 'field kit').

Example:

11271F Plotter Control ROM Field Kit

Once the field kit is installed in your calculator, it becomes an option; so the kit includes the appropriate option decal to be attached to the ROM door. In the above example the decal would be marked 'Option 271'.

## ◆◆◆◆◆ THE ROM'S ◆◆◆◆◆

The ROM's listed below are available at the beginning of 1973; as other ROM's become available, they will be described in data sheets and in the 'Keyboard' magazine.

### ◆ MATRIX OPERATIONS

|            |             |
|------------|-------------|
| 11270B     | (plug-in)   |
| Option 270 | (internal)  |
| 11270F     | (field kit) |

This ROM extends the BASIC language to include the statements used to manipulate matrices and array data. It provides fast solutions to simultaneous equations and to business and statistical problems, as well as providing convenient ways to handle large blocks of data. The determinant operation (not normally available in BASIC) is particularly helpful to structural and electronic engineers in solving their design problems.

### ◆ PLOTTER CONTROL

|            |             |
|------------|-------------|
| 11271B     | (plug-in)   |
| Option 271 | (internal)  |
| 11271F     | (field kit) |

This ROM enables the Model 30 to control the HP 9862A Calculator Plotter. Using your own 'problem' units (as opposed to some artificial 'plotter' units) you can very easily draw and mark axes on the plotter, and plot points or functions. You can label the axes and plotted points and you can use your plotter as a printer, formatting the printout as well as specifying character size and printing angle. In addition, you can establish a unique 'typewriter' mode which enables you to print, on the plotter, one character at a time from the calculator keyboard.

### ◆ EXTENDED I/O

|            |             |
|------------|-------------|
| 11272B     | (plug-in)   |
| Option 272 | (internal)  |
| 11272F     | (field kit) |

This ROM enables a wide variety of peripheral devices to be controlled by the calculator. It allows a two-way transfer of information between the calculator and the peripheral devices and between peripheral devices. Data is transferred by means of standard ASCII code; however, automatic code conversion capability enables the calculator to be very easily programmed to receive and send other codes. In addition, various logic functions enable you to manipulate binary bits, thus increasing the variety of I/O operations available.

(Continued)

 **THE ROM'S** 

(Continued)

**STRING VARIABLES** 

|            |             |
|------------|-------------|
| 11274B     | (plug-in)   |
| Option 274 | (internal)  |
| 11274F     | (field kit) |

This ROM enables the calculator to recognize and operate on letters and words ('strings') in very much the same ways that it recognizes and operates on digits and numbers. The calculator can be programmed to understand everyday language, making your programs truly conversational in style, and, consequently more easily used by personnel with no special training.

**TERMINAL** 

|            |             |
|------------|-------------|
| 11277B     | (plug-in)   |
| Option 277 | (internal)  |
| 11277F     | (field kit) |

This ROM enables the calculator to be used as the terminal in many time-share systems, and yet still retain its calculator capabilities. The calculator's own memory and text-editing ability has considerable cost-reduction advantages over other terminals. First, you can store and edit a program in the calculator and then transmit the complete program to the time-share system, thus saving on connect time. Secondly, you can store your programs in tape cassette files, thus saving on overnight and long-term storage costs. You can also send and receive program lines in languages other than BASIC, because syntax checking in the calculator can be temporarily suspended.

## APPENDIX D

### MODEL 60 CARD READER

This appendix describes the use of the Model 9860A Card Reader with the Model 30 (see Figure D-1). If you have purchased or if you are considering the purchase of this peripheral, you should read this appendix.

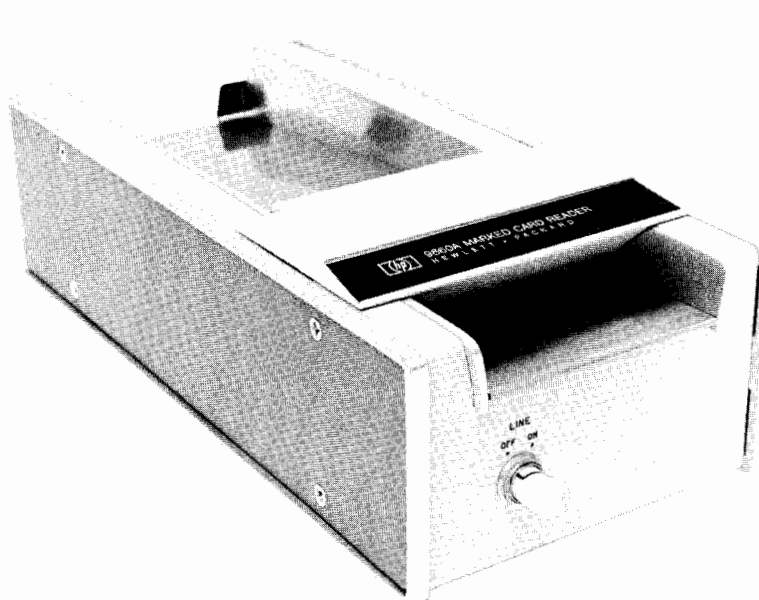


Figure D-1. 9860A Marked Card Reader

### ◆◆◆◆◆ GENERAL INFORMATION ◆◆◆◆◆

The Hewlett-Packard Model 9860A Marked Card Reader simulates a remote keyboard by allowing most operations that are available with the Model 30 Calculator. Key sequences are encoded on special cards. These cards are fed through the Model 60, which, by using an optical technique, senses the various combinations of marks on the card. There is a combination of marks to represent most keys on the Model 30 keyboard, and as a combination is detected, it is as if the associated calculator key has been pressed. A card is encoded to represent a series of keys by marking various combinations of boxes on the card with an ordinary black lead pencil.

The Model 60 does not require any special ROM to operate with the Model 30, nor are there any syntaxes associated with it.

The Card Reader Operating Manual (see Table D-1) describes the use of the card reader with the 9810A Calculator. Refer to that manual for general information about your card reader.

The accessories and equipment supplied with the Model 60 are listed in Table D-1.

(Continued)

## GENERAL INFORMATION

(Continued)

Table D-1. Card Reader Equipment

| Item                                                             | Quantity | -hp- Part Number |
|------------------------------------------------------------------|----------|------------------|
| Operating Manual                                                 | 2        | 09860-90001      |
| Interface Cable Assembly                                         | 1        | 09860-61605      |
| AC Power Cord                                                    | 1        | 8120-1575        |
| Spare Lamp†                                                      | 1        | 09160-67901      |
| Program Card                                                     | 25       | 9320-2085        |
| (The following items are not used in a 9830A Calculator system.) |          |                  |
| Diagnostic Card                                                  | 1        | 09860-90002      |
| Data Card                                                        | 25       | 9320-2088        |
| Supplement A                                                     | 1        | 09820-90050      |
| Model 20 Program and Data Card                                   | 50       | 09320-2885       |

† Located in the instrument — see 'CHANGING THE LAMP' in the operating manual.

## CARD READER OPERATION

### INSPECTION

Refer to 'Inspection Procedure' in Appendix A of this manual.

### INSTALLATION

#### CAUTION

DO NOT APPLY OPERATING POWER TO THE MODEL 9860A MARKED CARD READER UNLESS THE LINE VOLTAGE SWITCH ON THE REAR PANEL IS IN THE PROPER POSITION. OTHERWISE, DAMAGE TO THE POWER TRANSFORMER MAY RESULT.

Refer to Chapter 1 in the Card Reader Operating Manual for information concerning power and grounding requirements and installation procedures. Refer to Chapter 6 of that manual for the procedure to replace the lamp.

### USING THE CARD READER

The Model 60 Card Reader acts somewhat like a remote keyboard to the calculator. A card is marked, in a simple code, with the desired key sequence and the card is passed through the reader. The calculator then behaves as if the calculator keys, corresponding to the encoded key sequence, have been pressed.

Almost any key or key sequence can be input to the calculator from the card reader. Inputs can include data, expressions, program statements, and 'immediate execute' commands (such as CLEAR, PRINT ALL, EXECUTE, etc.).

The card reader starts automatically as soon as a card is fed in. The card passes through the reader at a constant speed so that the key codes are read and input to the calculator at regular intervals. There is no system of 'interrupt' between the calculator and the card reader so the calculator must be either idle or at an INPUT statement before the card reader can be used.<sup>†</sup>

Because there is no interrupt possible, any instruction which causes immediate activity on the part of the calculator, such as END OF LINE or EXECUTE, should be the last keycode on the card. If other keycodes do follow, some of them may be missed by the calculator while it is carrying out the earlier instruction. It is possible to encode 'skips' on the card to give the calculator extra time to complete an operation before it receives the next keycode. However, this is not recommended because the number of skips required is difficult to predict (e.g., it obviously takes longer to enter an 80-character line into memory than it takes to enter a 10-character line).

Table D-2. Key Codes

| CODE | KEY<br>(or symbol) | CODE | KEY<br>(or symbol) | CODE | KEY<br>(or symbol) | CODE | KEY<br>(or symbol) |
|------|--------------------|------|--------------------|------|--------------------|------|--------------------|
| 0    | $f_0$ (note 1)     | 40   | Space Bar          | 100  | @                  | 140  | (not used)         |
| 1    | $f_1$              | 41   | !                  | 101  | A                  | 141  | a (note 3)         |
| 2    | $f_2$              | 42   | "                  | 102  | B                  | 142  | b                  |
| 3    | $f_3$              | 43   | #                  | 103  | C                  | 143  | c                  |
| 4    | $f_4$              | 44   | \$                 | 104  | D                  | 144  | d                  |
| 5    | $f_5$              | 45   | %                  | 105  | E                  | 145  | e                  |
| 6    | $f_6$              | 46   | &                  | 106  | F                  | 146  | f                  |
| 7    | $f_7$              | 47   | '                  | 107  | G                  | 147  | g                  |
| 10   | $f_8$              | 50   | (                  | 110  | H                  | 150  | h                  |
| 11   | $f_9$              | 51   | )                  | 111  | I                  | 151  | i                  |
| 12   | LIST               | 52   | *                  | 112  | J                  | 152  | CLEAR              |
| 13   | EXECUTE            | 53   | +                  | 113  | K                  | 153  | RESULT             |
| 14   | CONT               | 54   | ,                  | 114  | L                  | 154  | l                  |
| 15   | STEP               | 55   | -                  | 115  | M                  | 155  | m                  |
| 16   | TRACE              | 56   | .                  | 116  | N                  | 156  | n                  |
| 17   | RUN                | 57   | /                  | 117  | O                  | 157  | ENTER EXP          |
| 20   | RECALL             | 60   | 0                  | 120  | P                  | 160  | PRT ALL            |
| 21   | FETCH              | 61   | 1                  | 121  | Q                  | 161  | q                  |
| 22   | BACK               | 62   | 2                  | 122  | R                  | 162  | END OF LINE        |
| 23   | FORWARD            | 63   | 3                  | 123  | S                  | 163  | DELETE LINE        |
| 24   | ↓ (display)        | 64   | 4                  | 124  | T                  | 164  | FIXED N            |
| 25   | ↑ (display)        | 65   | 5                  | 125  | U                  | 165  | FLOAT N            |
| 26   | ← (display)        | 66   | 6                  | 126  | V                  | 166  | SCRATCH            |
| 27   | → (display)        | 67   | 7                  | 127  | W                  | 167  | AUTO #             |
| 30   | LOAD               | 70   | 8                  | 130  | X                  | 170  | x                  |
| 31   | STORE              | 71   | 9                  | 131  | Y                  | 171  | y                  |
| 32   | INIT               | 72   | :                  | 132  | Z                  | 172  | z                  |
| 33   | /                  | 73   | ;                  | 133  | [                  | 173  | (not used)         |
| 34   | END                | 74   | <                  | 134  | ■ (note 2)         | 174  | (not used)         |
| 35   | STD                | 75   | =                  | 135  | ]                  | 175  | (not used)         |
| 36   | NORMAL             | 76   | >                  | 136  | ↑                  | 176  | (not used)         |
| 37   | INSERT             | 77   | ?                  | 137  | ⌞ (note 2)         | 177  | STOP               |

- Notes:**
- 1 —  $f_{10}$  through  $f_{19}$  not available via the card reader.
  - 2 — Codes 134 and 137 display a symbol but serve no other function.
  - 3 — Not all of the lower case alphabet is available via the card reader.

<sup>†</sup> TRACE and NORMAL are the only instructions which can be input via the card reader while the calculator is running a program.

## CARD READER OPERATION

(Continued)

### ENCODING

#### NOTE

Please read Chapter 2, The Model 60 Card, in the Card Reader Operating Manual, before reading the following material.

Figure D-2 shows a card marked with two data numbers (94.62 and -136.328E6) to be input during an INPUT statement. Notice that the sequence of keys marked is exactly the same as the sequence which would be pressed if the data numbers were to be input from the keyboard.

The card is divided into columns and rows; each row corresponds to one key. The extreme left of the card can be used to write a title and date. The next column, labeled 'STEP', is for use with the 9810A calculator (where every keystroke in a program has to have a step number); so it can be ignored. The two columns marked 'KEY' and 'CODE' are for you to write the keys to be encoded and the code number for each key. Table D-2 shows the key corresponding to each valid code number (using invalid code numbers will produce unpredictable results). The columns of rectangular boxes are used for the actual coding that is read by the card reader. The card reader scans the boxes a row at a time and inputs the corresponding key code from each row into the calculator.

Ignoring the SKIP column for the moment, the columns marked 100, 40, 20, 10, 4, 2 and 1 are for marking the key-codes. These boxes are marked with a pencil, so that the value of the boxes marked on a row, when totaled, equals the code for the desired key. For example, the first key in the card shown in Figure D-2 is the digit 9, which has code number 71. 71 is encoded by marking boxes 40, 20, 10 and 1 ( $40+20+10+1=71$ ).<sup>†</sup> Similarly, the ENTER EXP key, which has code 157, is encoded on the card by marking boxes 100, 40, 10, 4, 2, and 1. (The E key, code 105, could have been used instead of ENTER EXP.)

The SKIP column, if marked, will cause the Model 60 to ignore any boxes that are marked on that row. Marking the SKIP column can be used as an alternative to erasing; should you make an error in marking a row, you may either erase the error and correct it, or mark the SKIP column. In Figure D-2 the digit '7' was included in error, so the SKIP column was marked to prevent the card reader from reading that digit.

Near the bottom of the card, there is a preprinted mark that intersects all of the boxes. This mark, interpreted by the reader as 'SKIP 177', causes the card reader to stop reading the card. When a 'SKIP 177' is seen by the card reader, no additional information on that card is transferred to the calculator. If you do not use all of the rows on a card then you must mark a 'SKIP 177' immediately after the last row used. Otherwise, all unmarked rows will be interpreted as code '0', the code for the  $f_0$  key (and if  $f_0$  is undefined, ERROR 10 will result).

If a key sequence is longer than can be encoded on a single card, simply encode the first part of the sequence on one card, and the second part on another. Neither card needs any special encoding. Just insert the cards, one after the other, in the obvious order.

<sup>†</sup> The computer-oriented operator will recognize the marked boxes as representing the binary equivalent of an octal number.

**hp**  
CALCULATOR PROGRAM CARD

CARD NO. \_\_\_\_\_

| STEP | KEY          | CODE | SKIP                     | 100                      | 40                       | 20                       | 10                       | 4                        | 2                        | 1                        |
|------|--------------|------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| 0    | 9            | 71   | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 1    | 4            | 64   | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 2    | •            | 56   | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 3    | <del>7</del> | 67   | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 4    | 6            | 66   | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 5    | 2            | 62   | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 6    | 3            | 54   | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 7    | —            | 55   | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 8    | 1            | 61   | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 9    | 3            | 63   | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 0    | 6            | 66   | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 1    | •            | 56   | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 2    | 3            | 63   | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 3    | 2            | 62   | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 4    | 8            | 70   | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 5    | E. EX        | 157  | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 6    | 6            | 66   | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 7    | EXEC         | 13   | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 8    |              |      | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 9    |              |      | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 0    |              |      | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 1    |              |      | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 2    |              |      | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 3    |              |      | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 4    |              |      | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 5    |              |      | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 6    |              |      | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 7    |              |      | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 8    |              |      | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 9    |              |      | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

DATE \_\_\_\_\_

TITLE \_\_\_\_\_

1. USE SOFT PENCIL  
2. ERASE COMPLETELY  
3. INSERT THIS SIDE UP  
4. MARKING SKIP COLUMN CAUSES THAT ROW TO BE SKIPPED.

Part No. 9320-2085

TIMING MARK M87083

## NOTES

- ① Strobe Marks.
- ② SKIP is marked to cover an error.
- ③ SKIP 177 turns the reader off. SKIP 177 is not a key-code — it is an instruction to the Model 60 only.
- ④ Insert card into the card reader, printed side up, in the direction indicated by the arrow.

Figure D-2. The Program Card

**E-0**



**NOTES**

## APPENDIX E

### ERROR CODES

The error codes and messages listed in Table E-2 are also located on a slide-out card underneath the Model 30.

When an error occurs, the calculator makes a soft beeping sound and an error code appears on the display. The error message that corresponds to this code helps to pinpoint the cause of the error. Errors can be either recoverable or non-recoverable. The differences between the two are discussed next.

#### ◆ RECOVERABLE vs NON-RECOVERABLE ERRORS ◆

Most errors are non-recoverable. When a non-recoverable error occurs in the calculator mode, press the RECALL key to return your input to the display. Make suitable corrections as referenced by the error message and then re-execute the line.

Recoverable errors (error 100 through 107) occur when you are working with very large or very small numbers. When a recoverable error occurs, an approximation of your result appears on the display together with the appropriate error code.

If, say, you execute the following:

$$A = 1.2E63 * 4E41$$

The display is:

ERROR 100      9.999999E+99

The code, ERROR 100, indicates that the positive range of the calculator has been exceeded. In this example the variable, A, is set equal to 9.9999999999E+99. (All the 9's are not displayed if you are in the standard mode.) The variable, A, can then be used in further calculations.

If either a recoverable or a non-recoverable error occurs during program execution, the program halts. If the error is recoverable, the program can be continued from that point if you press the keys — CONT EXECUTE. But if the error is non-recoverable, the program must be corrected and re-executed.

## ◆◆◆◆◆ ERROR MESSAGES ◆◆◆◆◆

Table E-2 is a duplicate of the slide-out, error-code card underneath the Model 30. Please keep in mind that the error messages only help to reference an error. In some cases, the particular error that is displayed may not pinpoint the specific error that occurred.

Errors 4 through 8 are general errors; they are often displayed before the calculator can determine a more specific error.

Table E-1, below, gives some additional explanations to particular error-code messages.

**Table E-1. Additional Error-Message Explanation**

| Code     | Message                                                                                                                                                                                                                                                                                                                                        |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ERROR 1  | ROM configuration error; occurs if a program that requires a particular ROM is run without having the ROM installed.                                                                                                                                                                                                                           |
| ERROR 2  | Memory overflow; occurs if the calculator needs more memory than is available. (Remember that during program execution, the calculator temporarily uses a small portion of user memory.)                                                                                                                                                       |
| ERROR 4  | Missing line number or integer, or integer out of range; often occurs when END OF LINE is pressed instead of EXECUTE.                                                                                                                                                                                                                          |
| ERROR 5  | No statement or command recognized; often occurs if END OF LINE is pressed instead of EXECUTE, or vice versa.                                                                                                                                                                                                                                  |
| ERROR 40 | Variable or function is undefined; most commonly occurs if the simple variable specified does not have a value.                                                                                                                                                                                                                                |
| ERROR 44 | Line not found; occurs if the line referenced in a statement is not in memory.                                                                                                                                                                                                                                                                 |
| ERROR 58 | Cassette status error; occurs a) if the cassette door is open or slightly ajar; b) if the end of tape is reached without finding the specified file; c) if the cassette is protected (see Chapter 5); d) if the specified peripheral cassette memory is turned off; e) if a STOP command is given while information is being recorded on tape. |
| ERROR 59 | Check sum error; often occurs if the tape head is dirty or if the portion of the tape accessed is damaged.                                                                                                                                                                                                                                     |
| ERROR 60 | Improper file size; also occurs if there is no COM statement in memory and you attempt to STORE DATA without the array specification.                                                                                                                                                                                                          |

A fold-out of both the error codes and the calculator keyboard is included here for your convenience.

Those error codes that are related to the ROM's are given in the back of the ROM manuals.

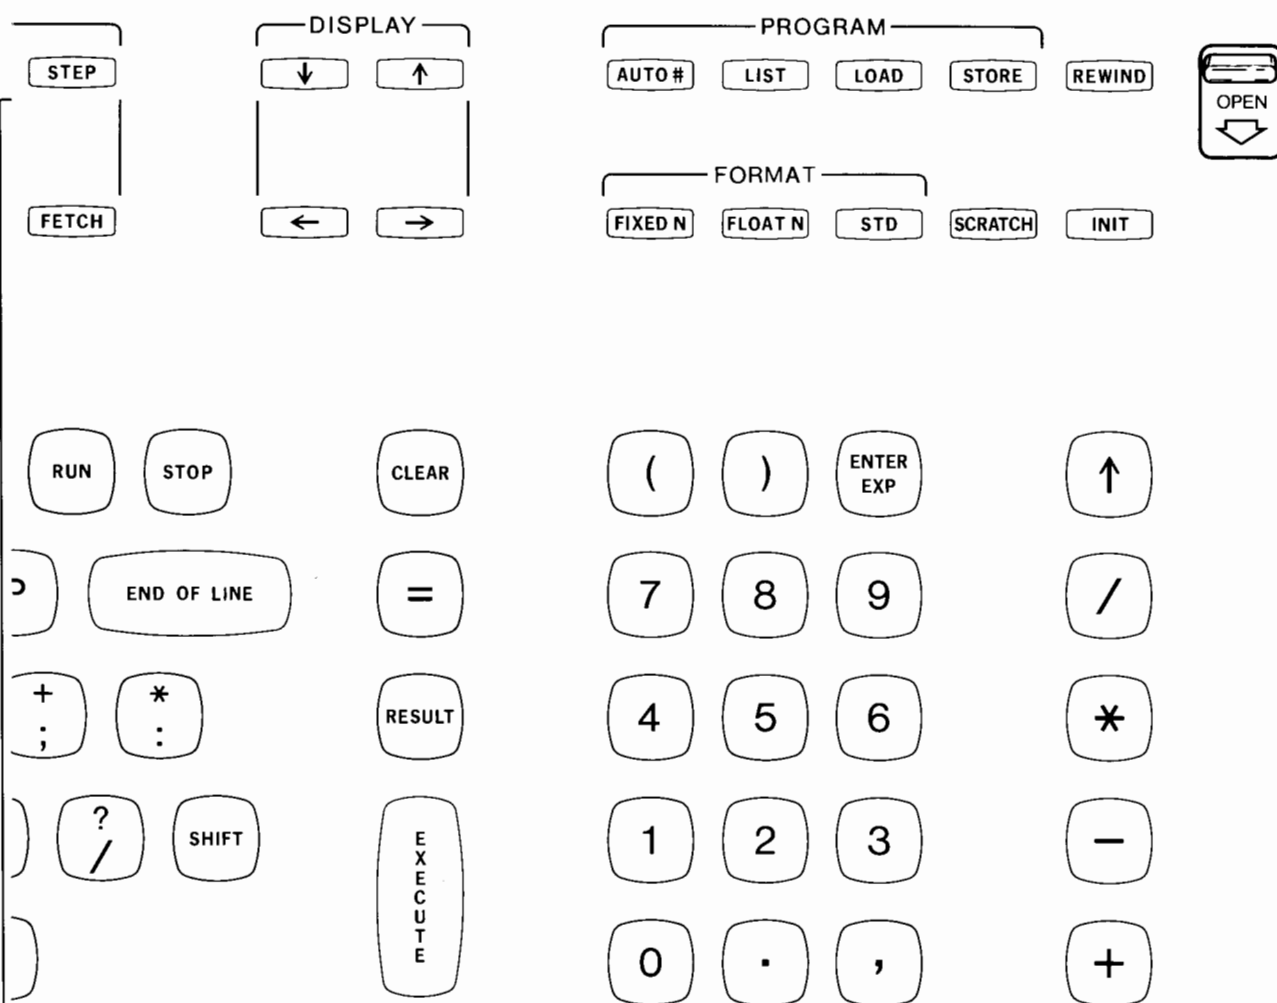


Figure E-1. Model 9830A Keyboard

$f_0$

$f_1$

$f_2$

$f_3$

$f_4$

$f_5$

$f_6$

$f_7$

$f_8$

$f_9$

EDIT

NORMAL

TRACE

PRT ALL

CONT

BACK

FORWARD

INSERT

RECALL

! 1

" 2

# 3

\$ 4

% 5

& 6

' 7

( 8

) 9

- 0

DELETE LINE

Q

W

E

R

T

Y

U

I

O

P

END

A

S

D

F

G

H

J

K

L

(

SHIFT

Z

X

C

V

B

N

M

< ,

> .

**Table E-2. Error Codes**

**9830 NON-RECOVERABLE ERRORS**

|                                                                |                                                               |                                                                |
|----------------------------------------------------------------|---------------------------------------------------------------|----------------------------------------------------------------|
| 1 Memory configuration error                                   | 24 Improper IF... THEN statement                              | 47 Improper RETURN                                             |
| 2 Memory overflow                                              | 25 Missing OF in conditional GO TO statement                  | 48 FOR statement has no matching NEXT or incorrect FOR nesting |
| 3 Statement is not allowed in keyboard mode                    | 26 Missing variable                                           | 49 Out of DATA                                                 |
| 4 Missing line number or integer, or integer out of range      | 27 Missing or improper FOR variable                           | 50 Last statement is not END                                   |
| 5 No statement or command recognized                           | 28 Missing TO in FOR statement                                | 51 LOG or LGT of negative number                               |
| 6 Improper arithmetic expression, missing number or expression | 29 Missing STEP or illegal characters following FOR statement | 52 SQR of negative number                                      |
| 7 Characters follow statement's logical end                    | 30 Missing assignment operator                                | 53 Zero to zero power                                          |
| 8 Missing punctuation in program statement                     | 31 Missing or improper assignment                             | 54 Non integer power of negative number                        |
| 9 Invalid command unless in KEY mode                           | 32 Improper FORMAT specification                              | 55 Cassette operation statement syntax error                   |
| 10 User KEY is undefined                                       | 33 COM statement rules not followed                           | 56 Wrong file or file not found                                |
| 11 Exponent is out of range                                    | 34 Improper common declaration                                | 57 Improper operation on SECURE program                        |
| 12 Two decimal points in number                                | 35 Array is doubly defined                                    | 58 Cassette status error                                       |
| 13 Sign given without number                                   | 36 Precision of variable is doubly defined                    | a. Door open                                                   |
| 14 Missing comma                                               | 37 Inconsistent dimensions are given                          | b. Clear leader                                                |
| 15 Missing left parenthesis                                    | 38 Array has unknown dimensions                               | c. Write not permitted                                         |
| 16 Missing right parenthesis                                   | 39 Dimensions are too large                                   | d. Cassette power off                                          |
| 17 Missing subscript                                           | 40 Variable or function is undefined                          | e. STOP given during a write operation                         |
| 18 String not permitted                                        | 41 Array or string has not been initialized                   | 59 Check sum error                                             |
| 19 No opening quote or missing string variable                 | 42 Subscript exceeds bounds                                   | 60 Improper file size                                          |
| 20 No closing quote                                            | 43 Select code exceeds bounds                                 | 61 Improper precision or data type                             |
| 21 Missing or improper function identifier                     | 44 Line not found                                             | 62 Improper file type                                          |
| 22 Missing function parameter                                  | 45 Improper statement type referenced                         | 63 Program overlay                                             |
| 23 Missing or incorrect DATA item                              | 46 Improper statement nesting in multiline function           |                                                                |

**9830 RECOVERABLE ERRORS**

|                                                 |                                                     |                                                         |
|-------------------------------------------------|-----------------------------------------------------|---------------------------------------------------------|
| 100 Numeric overflow (assumes + or - $\infty$ ) | 103 Division by zero (assumes + or - $\infty$ )     | 106 Split variable overflow (assumes + or -9.99999E+63) |
| 101 Numeric underflow (assumes 0)               | 104 Zero to negative power (assumes + $\infty$ )    | 107 Split variable underflow (assumes 0)                |
| 102 LOG or LGT of zero (assumes - $\infty$ )    | 105 Integer variable overflow (assumes + or -32767) |                                                         |

Note: The calculator approximates + and -  $\infty$  by 9.9999999999E+99 and -9.9999999999E+99, respectively.

## APPENDIX F

### PRINTER OPERATING PROCEDURES

This appendix discusses operation of the primary printers described in Appendix A.

#### PRINTER SELECT CODE

Any device connected to the calculator requires a 'select code' so that the calculator can distinguish it from all other devices. The select code on a primary printer must be set to '15'. The 9866A Printer (Option 30), the interface for the 9861A Output Typewriter, and the 11205A Serial I/O Interface used with the teleprinter, are all preset, at the factory, to select code 15. But any of the printers can be used as a secondary printer with the Model 30, too, if the select code of the supplied interface card is changed. (To use the 9866A Printer as a secondary printer, the -hp- 09866-61610 interface card must be purchased.)

#### THE 9866A PRINTER

Of the printers discussed in Appendix A, the 9866A Printer is easiest to operate because it has no mechanical controls, other than the PAPER key, which is used to manually advance paper. Once the printer has been connected to the calculator, loaded with paper, and turned on (see Appendix A), it is controlled by the calculator.

The statements and commands used to control the printer are fully described in the appropriate places in this book. Table F-1 lists each operation and tells you in which chapter to look for its explanation. You may also wish to refer to 'Printer Character Codes', later in this appendix; however, it is recommended that you become proficient in the use of the WRITE and FORMAT statements before doing so.

#### THE 9861A OUTPUT TYPEWRITER

Before the typewriter can be controlled from the calculator, its controls must be properly set. Necessary control settings on the typewriter consist of:

- The desired line-spacing;
- The margins, to suit your paper;
- Black ribbon (red or black ribbon can be set from the calculator, but only if the typewriter is set to black ribbon);
- The 'shift' key being unlocked (the calculator will automatically shift the typewriter keyboard, if it needs to, to obtain a particular character);
- The impact regulator being set for the desired copy hardness;
- Select code 15 being set.

Even though the typewriter is connected to the calculator, the keyboard on the typewriter is completely operational. So, if you wish, you can clear and set tabs, carriage-return, or perform any other 'initializing' operations; or you can type directly

(Continued)

## ◆◆◆ THE 9861A OUTPUT TYPEWRITER ◆◆◆

(Continued)

from the typewriter keyboard. All of these operations can also be controlled from the calculator.

The statements and commands used to control the typewriter (which are the same as those used to control the 9866A Printer) are fully described in the appropriate places in this book (see Table F-1). The section, 'Printer Character Codes', later in this appendix gives the codes that are needed to perform additional control functions, such as clearing and setting tabs, and changing from black to red ribbon.

The calculator automatically shifts the typewriter keyboard if it needs to do so to print a particular character. So, when you are typing characters for the typewriter on the calculator keyboard, you do not need to know whether the typewriter keyboard is to be shifted or not; but you do need to know if the calculator keyboard has to be shifted (as it does, for example, when you wish to print a lower case letter).

### ————— Example —————

Following is a printout, from a typewriter, and the program which produced it. The program demonstrates some of the flexibility that you have in formatting the typewriter output. This program relies heavily on the use of the character codes, which are described at the end of this appendix. Therefore it is recommended that you become proficient with the typewriter and, in particular, with the WRITE and FORMAT statements, before you spend any time analyzing this program.

The 9861A Typewriter can be controlled by the 9830  
Calculator. The ribbon can be changed to red and  
back to black.

Physical tabs can be set,  
and the tab key can be operated.  
The following special characters  
can be typed:

[  
]  
{  
}  
~  
"  
,

Also you can cause the typewriter to  
skip lines, backspace, and clear tabs.

```

10 FORMAT 15B
20 FIXED 0
30 X=9830
40 PRINT TAB60;
50 WRITE (15,10)11,7
60 PRINT "The 9861A Typewriter can be controlled by the";X
70 PRINT "Calculator. The ribbon can be ";
80 WRITE (15,10)6"changed to red "7"and"
90 PRINT "back to black."
100 PRINT
110 PRINT TAB18;
120 WRITE (15,10)1,"Physical tabs can be set,"
130 WRITE (15,10)9"and the tab key can be operated."
140 WRITE (15,10)9"The following special characters "
150 WRITE (15,10)9"can be typed:"
160 PRINT TAB18;
170 WRITE (15,10)12;
180 PRINT TAB30;
190 WRITE (15,10)1;91,10,8,93,10,8,123
200 WRITE (15,10)9,125,10,8,126,10,8,34,10,8,96
210 WRITE (15,10)11,10,10,"Also you can ";
220 PRINT "cause the typewriter to"
230 WRITE (15,10)"skip lines, backspace";
240 FOR I=1 TO 9
250 WRITE (15,10)8;95;8;
260 NEXT I
270 PRINT "          , and clear tabs."
280 END

```

Table F-1. Printer Operations

| COMMAND<br>or<br>STATEMENT | DESCRIPTION                               | REFER TO<br>CHAPTER... |
|----------------------------|-------------------------------------------|------------------------|
| PRINT                      | Standard printing statement               | 3                      |
| WRITE                      | Enables more flexible format for printing | 3                      |
| LIST                       | Lists program lines                       | 4                      |
| PRT ALL                    | Prints each operation                     | 2                      |
| TRACE                      | Prints line number as line is executed    | 4                      |
| NORMAL                     | Cancels TRACE                             | 4                      |
| TLIST                      | Lists information from tape cassette      | 5                      |

## ◆ THE TELETYPE 38 ASR DATA TERMINAL ◆

Before the teleprinter can be controlled by the calculator, its controls must be properly set.

On the teleprinter:

- Select LINE operation;
- Ensure that SHIFT LOCK is unlocked.

On the interface:

- Set select code 15 (see page F-1, Printer Select Code);
- Set a baud rate of 110 — the interface is preset at the factory for a baud rate of 110, so it will probably not need adjusting† (refer to the manual for the 11205A Serial I/O Interface for complete details).

The statements and commands used to control the teleprinter (which are the same as those used to control the 9866A Printer) are fully described in the appropriate places in this book (see Table F-1). The section 'Printer Character Codes', later in this appendix, gives the codes that are needed to perform additional control functions, such as changing ribbon color, form-feeding, and executing a line feed without a carriage return (or vice versa).

The calculator automatically shifts the teleprinter keyboard if it needs to do so to print a particular character. So, when you are typing characters for the teleprinter on the calculator keyboard, you do not need to know whether or not the teleprinter keyboard has to be shifted for that character; but you do need to know if the calculator keyboard has to be shifted (as it does, for example, when you wish to print a lower case letter).

### ———— Example ————

Following is a printout, from a teleprinter, and the program which produced it. The program demonstrates some of the flexibility that you have in formatting the teleprinter output. This program relies heavily on the use of the character codes, which are described at the end of this appendix. Therefore, it is recommended that you become proficient with the teleprinter and, in particular, with the WRITE and FORMAT statements, before you spend any time analyzing this program.

```
The Model 38 teleprinter can be controlled by the 9830A
Calculator. Among other things, the ribbon can be changed
to red and back to black.
```

```
      The teleprinter can be made to
            tab           to any      position,
as can be seen from this printout!
```

```
The following special characters
can be typed:
```

```
" [ \ ]
` { | } ~
```

```
Also you can make the teleprinter carriage return
without executing a linefeed. This enables you to
underline.
```

† If necessary, it is very easy to adjust the baud rate, by means of a calibrated screwdriver-control on the underside of the interface card. Remove the card from the interface slot at the back of the calculator, and adjust the control to the desired setting.

```

10 FORMAT 15B
20 X=9830
30 PRINT
40 PRINT
50 WRITE (15,60)"can be controlled by the",X
60 FORMAT "The Model 38 teleprinter ",FS.0,"A"
70 PRINT "Calculator. Among other things, the ribbon ";
80 WRITE (15,10)"can be "27,51"changed"
90 WRITE (15,10)"to red and "27,52"back to black."
100 PRINT
110 PRINT TAB10"The teleprinter can be made to "
120 PRINT TAB15"tab"TAB25"to any"TAB39"position,"
130 PRINT TAB10"as can be seen from this printout!"
140 PRINT
150 PRINT "The following special characters"
160 PRINT "can be typed:"
170 PRINT TAB13;
180 WRITE (15,10)34,32,91,32,92,32,93,10
190 PRINT TAB13;
200 WRITE (15,10)96,32,123,32,124,32,125,32,126
210 WRITE (15,10)10"Also you can ";
220 PRINT "make the teleprinter carriage return"
230 WRITE (15,10)"without executing a linefeed. This ";
240 WRITE (15,10)"enables you to"13,0;
250 PRINT TAB47;
260 WRITE (15,10)95,95
270 WRITE (15,10)"underline."13,0;
280 FOR I=1 TO 10
290 WRITE (15,10)95;
300 NEXT I
310 PRINT
320 END

```



Notice in lines 80 and 90 of the program that the teleprinter requires two keys to change ribbon color:

ESC 3 (codes 27, 51) selects red ribbon;  
 ESC 4 (codes 27, 52) selects black ribbon.

## PRINTER CHARACTER CODES

Table F-2 lists the decimal codes used in WRITE statements to reference FORMAT B statements (described in Chapter 3). The table lists (decimal) numbers 0 through 127 and gives the corresponding ASCII character (or control function) for the 9866A Printer, for the 9861A Typewriter and for the 38 ASR teleprinter. Some of these characters and control functions can be obtained only by using their decimal equivalents in WRITE (with FORMAT B) statements. However, many of them can also be obtained directly from the calculator keyboard. An empty space opposite a decimal code in the table indicates that the specific printing device does not recognize that code number and that it will simply ignore it.

(Continued)

## PRINTER CHARACTER CODES

(Continued)

### NOTE

If you are using any other printer, refer to its manual for its character set. Some manuals may give the binary or octal equivalents, rather than the decimal equivalents of the characters. In these cases you must convert the binary or octal numbers to their equivalent decimal values, because only the decimal numbers can be used in WRITE (with FORMAT B) statements.

In general, you will not need the character codes for the 9866A Printer because most of its characters, and all of its control functions, can be obtained from the calculator keyboard. When using the typewriter or the teleprinter, you will need these codes to perform additional control functions, such as changing from black ribbon to red ribbon, setting tabs (on the typewriter) and form-feeding (on the teleprinter).

The codes for all of the teleprinter keys are included. However, the teleprinter itself does not respond to some of these keys, even though, as a terminal, it may transmit them. For example, it has a backspace key (BS, code 8) but its carriage cannot backspace. (Refer to the manual supplied with the teleprinter for complete details.)

**Table F-2. Printer Characters and Equivalent Decimal Codes**

| Decimal Code | 9866A Printer      | 9861A Typewriter | 38 ASR Teleprinter | Decimal Code | 9866A Printer | 9861A Typewriter | 38 ASR Teleprinter |
|--------------|--------------------|------------------|--------------------|--------------|---------------|------------------|--------------------|
| 0            |                    |                  | NUL                | 25           |               |                  | EM                 |
| 1            |                    | TAB SET          | SOH                | 26           |               |                  | SUB                |
| 2            |                    |                  | STX                | 27           |               |                  | ESC                |
| 3            |                    |                  | ETX                | 28           |               |                  | FS                 |
| 4            |                    |                  | EOT                | 29           |               |                  | GS                 |
| 5            |                    |                  | ENQ                | 30           |               |                  | RS                 |
| 6            |                    | RED RIBBON       | ACK                | 31           |               |                  | US                 |
| 7            |                    | BLACK RIBBON     | BEL                | 32           | SPACE         | SPACE            | SP                 |
| 8            |                    | BACKSPACE        | BS                 | 33           | !             | !                | !                  |
| 9            |                    | TAB              | HT                 | 34           | "             | "                | "                  |
| 10           | RETURN & LINE FEED | LINE FEED        | LF                 | 35           | #             | #                | #                  |
| 11           |                    | CLEAR ALL TABS   | VT                 | 36           | \$            | \$               | \$                 |
| 12           |                    | TAB CLEAR        | FF                 | 37           | %             | %                | %                  |
| 13           |                    | CARRIAGE RETURN  | CR                 | 38           | &             | &                | &                  |
| 14           |                    |                  | SO                 | 39           | ,             | ,                | ,                  |
| 15           |                    |                  | SI                 | 40           | (             | (                | (                  |
| 16           |                    |                  | DLE                | 41           | )             | )                | )                  |
| 17           |                    |                  | DC1                | 42           | *             | *                | *                  |
| 18           |                    |                  | DC2                | 43           | +             | +                | +                  |
| 19           |                    |                  | DC3                | 44           | ,             | ,                | ,                  |
| 20           |                    |                  | DC4                | 45           | -             | -                | -                  |
| 21           |                    |                  | NAK                | 46           | .             | .                | .                  |
| 22           |                    |                  | SYN                | 47           | /             | /                | /                  |
| 23           |                    |                  | ETB                | 48           | 0             | 0                | 0                  |
| 24           |                    |                  | CAN                | 49           | 1             | 1                | 1                  |

Table F-2. Printer Characters and Equivalent Decimal Codes (cont'd)

| Decimal Code | 9866A Printer | 9861A Typewriter | 38 ASR Teleprinter | Decimal Code | 9866A Printer | 9861A Typewriter | 38 ASR Teleprinter |
|--------------|---------------|------------------|--------------------|--------------|---------------|------------------|--------------------|
| 50           | 2             | 2                | 2                  | 90           | Z             | Z                | Z                  |
| 51           | 3             | 3                | 3                  | 91           | [             | [                | [                  |
| 52           | 4             | 4                | 4                  | 92           | \             | \                | \                  |
| 53           | 5             | 5                | 5                  | 93           | }             | }                | }                  |
| 54           | 6             | 6                | 6                  | 94           | ↑             | ^                | ^                  |
| 55           | 7             | 7                | 7                  | 95           | —             | —                | —                  |
| 56           | 8             | 8                | 8                  | 96           | @             | ,                | ,                  |
| 57           | 9             | 9                | 9                  | 97           | A             | a                | a                  |
| 58           | :             | :                | :                  | 98           | B             | b                | b                  |
| 59           | ;             | ;                | ;                  | 99           | C             | c                | c                  |
| 60           | <             | <                | <                  | 100          | D             | d                | d                  |
| 61           | =             | =                | =                  | 101          | E             | e                | e                  |
| 62           | >             | >                | >                  | 102          | F             | f                | f                  |
| 63           | ?             | ?                | ?                  | 103          | G             | g                | g                  |
| 64           | @             | @                | @                  | 104          | H             | h                | h                  |
| 65           | A             | A                | A                  | 105          | I             | i                | i                  |
| 66           | B             | B                | B                  | 106          | J             | j                | j                  |
| 67           | C             | C                | C                  | 107          | K             | k                | k                  |
| 68           | D             | D                | D                  | 108          | L             | l                | l                  |
| 69           | E             | E                | E                  | 109          | M             | m                | m                  |
| 70           | F             | F                | F                  | 110          | N             | n                | n                  |
| 71           | G             | G                | G                  | 111          | O             | o                | o                  |
| 72           | H             | H                | H                  | 112          | P             | p                | p                  |
| 73           | I             | I                | I                  | 113          | Q             | q                | q                  |
| 74           | J             | J                | J                  | 114          | R             | r                | r                  |
| 75           | K             | K                | K                  | 115          | S             | s                | s                  |
| 76           | L             | L                | L                  | 116          | T             | t                | t                  |
| 77           | M             | M                | M                  | 117          | U             | u                | u                  |
| 78           | N             | N                | N                  | 118          | V             | v                | v                  |
| 79           | O             | O                | O                  | 119          | W             | w                | w                  |
| 80           | P             | P                | P                  | 120          | X             | x                | x                  |
| 81           | Q             | Q                | Q                  | 121          | Y             | y                | y                  |
| 82           | R             | R                | R                  | 122          | Z             | z                | z                  |
| 83           | S             | S                | S                  | 123          | [             | {                | {                  |
| 84           | T             | T                | T                  | 124          | \             |                  |                    |
| 85           | U             | U                | U                  | 125          | ]             | }                | }                  |
| 86           | V             | V                | V                  | 126          | ↑             | ~                | ~                  |
| 87           | W             | W                | W                  | 127          |               |                  | DEL                |
| 88           | X             | X                | X                  |              |               |                  |                    |
| 89           | Y             | Y                | Y                  |              |               |                  |                    |

# INDEX

## A

ABS (absolute value) function . . . . . 2-14, 2-15  
 accessories list . . . . . B-1  
 accuracy (significant digits) . . . . . 2-4  
 AND operator . . . . . 2-20  
 arccosine function . . . . . 2-18  
 arcsine function . . . . . 2-18  
 arctangent (ATN) function . . . . . 2-17, 2-18  
 arithmetic  
   calculating . . . . . 2-6  
   hierarchy . . . . . 2-6  
   keys . . . . . 2-6  
 array variables . . . . . 2-9 — 2-10, 3-36 — 3-37  
 arrows  
   ↓, ↑ . . . . . 4-6  
   ←, → . . . . . 2-12  
 ASCII character codes . . . . . F-5 — F-7  
 assignment (LET) statement . . . . . 2-9, 3-3  
 at '@' symbol . . . . . 1-2  
 ATN (arctangent) function . . . . . 2-17, 2-18  
 AUTO# key . . . . . 4-4

## B

BACK key . . . . . 2-10  
 BASIC statements  
   comparisons . . . . . 3-1  
   discussions . . . . . 3-3 — 3-42  
   syntaxes . . . . . 3-44 — 3-46

## C

calculating range . . . . . 1-3  
 calculator  
   cleaning . . . . . A-3  
   fuses . . . . . A-2  
   grounding . . . . . A-2  
   initial turn-on . . . . . A-3  
   inspection . . . . . A-1  
   installation . . . . . A-1 — A-3  
   keyboard . . . . . E-3  
   power outlets . . . . . A-2  
   power requirements . . . . . A-1  
 card reader, model 60 . . . . . D-1 — D-5  
 cassette  
   cleaning transport . . . . . 5-2  
   commands . . . . . 5-4 — 5-23  
   file structure . . . . . 5-3

insertion into transport . . . . . 5-1  
 peripherals . . . . . 5-24  
 protecting . . . . . 5-1  
 specifications . . . . . 5-1  
 storage . . . . . 5-2  
 syntaxes . . . . . 5-4, 5-25  
 chapters  
   summary . . . . . ii  
   tabbed index . . . . . iii  
 checking a halted program . . . . . 4-11 — 4-12  
 cleaning  
   calculator . . . . . A-3  
   cassette transport . . . . . 5-2  
 CLEAR key . . . . . 1-4  
 COM (common) statement . . . . . 3-39 — 3-41  
 common logarithms (LGT) . . . . . 2-14, 2-15  
 CONT (continue) key . . . . . 4-1, 4-4  
 continuing a program  
   with CONT . . . . . 4-1, 4-4  
   with STEP . . . . . 4-10  
 COS (cosine) function . . . . . 2-17, 2-18

## D

DEF FN statement  
   multiple-line . . . . . 3-33 — 3-35  
   single-line . . . . . 3-32  
 DEG (degrees)  
   command . . . . . 2-17, 2-18  
   statement . . . . . 3-42  
 DEL (delete) command . . . . . 4-8  
 delete character space  
   with SHIFT INSERT . . . . . 2-10  
 DELETE LINE key . . . . . 4-8  
 DIM (dimension) statement . . . . . 3-38  
 DISP (display) statement  
   with TAB . . . . . 3-28  
 display keys  
   ↓, ↑ . . . . . 4-6  
   ←, → . . . . . 2-12

## E

e (exponential function) . . . . . 2-14, 2-15, 2-16  
 editing  
   in calculator mode . . . . . 2-10  
   in programming mode . . . . . 4-8  
 END  
   key . . . . . 6-1  
   statement . . . . . 3-7

END OF LINE key . . . . . 1-4, 3-2  
 ENTER EXP key . . . . . 2-4  
 equipment list . . . . . B-1  
 error  
     codes (fold-out) . . . . . E-3  
     discussion . . . . . E-1 — E-2  
 EXECUTE key . . . . . 1-4  
 EXP (exponential) function . . . 2-14, 2-15, 2-16  
 exponentiation '↑' key . . . . . 2-6  
 extended I/O ROM . . . . . C-3

## F

FETCH key . . . . . 4-6, 6-1  
 file structure of tape . . . . . 5-3  
 FIND command . . . . . 5-16  
 FIXED N  
     key . . . . . 2-2  
     statement . . . . . 3-41  
 FLOAT N  
     key . . . . . 2-3 — 2-4  
     statement . . . . . 3-41  
 flowcharting . . . . . 3-42  
 FOR (and NEXT) statements . . . 3-12 — 3-14  
     with STEP . . . . . 3-15 — 3-16  
 FORMAT (and WRITE) statements . 3-22 — 3-27  
 FORWARD key . . . . . 2-10  
 full-precision data . . . . . 3-38  
 functions  
     mathematical . . . . . 2-14 — 2-17  
     special . . . . . 6-1 — 6-7  
     trigonometric . . . . . 2-17 — 2-18  
 fuses  
     calculator . . . . . A-2  
     9866A printer . . . . . A-5

## G

GOSUB (and RETURN) statements . . . 3-30  
     with OF . . . . . 3-31  
 GOTO statement . . . . . 3-10  
     with OF . . . . . 3-31  
 GRAD  
     command . . . . . 2-17  
     statement . . . . . 3-42  
 grounding requirements  
     calculator . . . . . A-2  
     9866A printer . . . . . A-5

## H

hierarchy  
     arithmetic . . . . . 2-6  
     mathematical . . . . . 2-18  
     total . . . . . 2-21

## I

IF statement . . . . . 3-9  
 increasing calculator memory . . . . 5-13  
 INIT (initialize) key . . . . . 4-13, 4-14  
 initial turn-on  
     calculator . . . . . A-3  
     9866A printer . . . . . A-5  
 INPUT statement . . . . . 3-8  
 inputting data  
     with INIT key . . . . . 4-14  
     with INPUT statement . . . . . 3-8  
     with LOAD DATA command . . . 5-19 — 5-20  
     with READ statement . . . . . 3-18 — 3-20  
 INSERT key . . . . . 2-10  
 inspection, calculator . . . . . A-1  
 installation  
     calculator . . . . . A-1 — A-3  
     ROM . . . . . C-1 — C-2  
     9866A printer . . . . . A-5  
 INT (integer) function . . . . . 2-14, 2-15  
 integer-precision data . . . . . 3-38

## K

key  
     +, −, \*, / , ↑ . . . . . 2-6  
     ↓, ↑ . . . . . 4-6  
     ←, → . . . . . 2-12  
     = . . . . . 2-19  
 KEY ⌞ . . . . . 1-4, 6-1  
 keyboard  
     description . . . . . 1-2  
     drawing (fold-out) . . . . . E-3  
 Keyboard magazine . . . . . B-2

## L

length  
   display . . . . . 1-2  
   line . . . . . 1-3  
 LET (assignment) statement . . . . . 2-9, 3-3  
 line length . . . . . 1-3  
 LINK command . . . . . 5-13 – 5-14  
 LIST key . . . . . 4-7, 4-12  
 LOAD command . . . . . 5-10 – 5-13  
 LOAD BIN command . . . . . 5-22  
 LOAD DATA . . . . . 5-19 – 5-20  
 LOAD KEY command . . . . . 5-21, 6-7  
 logarithms  
   LGT (common) . . . . . 2-14, 2-15  
   LOG (natural) . . . . . 2-14, 2-15 – 2-16  
 logical evaluation . . . . . 2-19 – 2-21, 3-9  
 logical operators . . . . . 2-20  
 looping (in a program) . . . . . 3-10, 3-12 – 3-16  
 lower-case characters . . . . . 3-5  
   with teletype model 38 . . . . . F-4  
   9861A . . . . . F-1 – F-3

## M

manual summary . . . . . ii  
 MARK command  
   marking new tapes . . . . . 5-6  
   marking used tapes . . . . . 5-7  
 marked card reader . . . . . D-1 – D-5  
 mathematical  
   functions . . . . . 2-14 – 2-17  
   hierarchy . . . . . 2-18  
 matrix operations ROM . . . . . C-3  
 memory . . . . . 4-12 – 4-13  
 memory options . . . . . B-2  
 MERGE command . . . . . 5-14  
 model 30 (see calculator)  
 model 60 card reader . . . . . D-1 – D-5  
 multiplication '\*' key . . . . . 2-6

## N

natural logarithms (LOG) . . . . . 2-14, 2-15 – 2-16  
 NEXT statement (with FOR) . . . . . 3-12 – 3-16  
 non-recoverable errors . . . . . E-1  
 NORMAL key . . . . . 4-10  
 NOT operator . . . . . 2-20

## O

OR operator . . . . . 2-20  
 overlays, key . . . . . 6-7

## P

paper tape (PTAPE) command . . . . . 4-14  
 peripheral  
   cassettes . . . . . 5-24  
   connecting . . . . . B-3  
   equipment list . . . . . B-3  
 PI . . . . . 2-17, 2-18  
 plotter control ROM . . . . . C-3  
 power outlets, calculator . . . . . A-2  
 power requirements  
   calculator . . . . . A-1  
   9866A printer . . . . . A-5  
 preface . . . . . iii  
 primary printer . . . . . A-4  
 PRINT  
   command . . . . . 2-22  
   statement . . . . . 3-4  
   with TAB . . . . . 3-28  
 print-all (PRT ALL) key . . . . . 2-13  
 printers  
   ASCII character codes . . . . . F-5 – F-7  
   commands and statements . . . . . F-3  
   primary . . . . . A-4  
   select codes . . . . . F-1  
   teletype model 38 . . . . . F-4  
   9861A . . . . . F-1 – F-3  
   9866A . . . . . A-4 – A-5, F-1  
 program  
   checking (debugging) . . . . . 4-10 – 4-12  
   editing . . . . . 4-8 – 4-9  
   viewing . . . . . 4-6 – 4-7  
   writing . . . . . 3-1 – 3-2  
 programming statements  
   comparisons . . . . . 3-1  
   discussions . . . . . 3-3 – 3-42  
   syntaxes . . . . . 3-44 – 3-46  
 protecting cassettes . . . . . 5-1  
 PRT ALL (print-all) key . . . . . 2-13  
 PTAPE command . . . . . 4-14

## R

RAD (radians)  
   command . . . . . 2-17  
   statement . . . . . 3-42



|                                        |             |
|----------------------------------------|-------------|
| random number (RND) function . . . . . | 2-14, 2-16  |
| range, calculating . . . . .           | 1-3         |
| READ (and DATA) statements . . . . .   | 3-18        |
| with RESTORE . . . . .                 | 3-20        |
| RECALL key . . . . .                   | 2-12, 4-8   |
| record (see STORE)                     |             |
| recoverable errors . . . . .           | E-1         |
| relational operators . . . . .         | 2-19        |
| REM (remark) statement . . . . .       | 3-11        |
| REN (renumber) command . . . . .       | 4-5         |
| repetition of operations . . . . .     | 1-2         |
| RESTORE statement . . . . .            |             |
| with READ and DATA . . . . .           | 3-20        |
| RESULT key . . . . .                   | 2-8         |
| RETURN statement . . . . .             |             |
| with DEF FN . . . . .                  | 3-33 — 3-35 |
| with GOSUB . . . . .                   | 3-30, 3-31  |
| REWIND command . . . . .               | 5-17        |
| RND (random number) function . . . . . | 2-14, 2-16  |
| ROM's . . . . .                        |             |
| description . . . . .                  | C-1         |
| extended I/O . . . . .                 | C-3         |
| installing . . . . .                   | C-1 — C-2   |
| matrix . . . . .                       | C-3         |
| ordering . . . . .                     | C-2         |
| plotter . . . . .                      | C-3         |
| strings . . . . .                      | 5-18, C-4   |
| terminal . . . . .                     | C-4         |
| rounding . . . . .                     | 2-5         |
| RUN key . . . . .                      | 4-1, 4-2    |

## S

|                                         |                |
|-----------------------------------------|----------------|
| SCRATCH key . . . . .                   | 2-14, 4-9, 6-6 |
| SEC (secure) command . . . . .          | 4-15           |
| service contracts . . . . .             | B-2            |
| SGN (sign) function . . . . .           | 2-15, 2-17     |
| significant digits (accuracy) . . . . . | 2-4            |
| simple variables . . . . .              | 2-8            |
| simultaneous calculations . . . . .     | 2-22           |
| SIN (sine) function . . . . .           | 2-17, 2-18     |
| spacing . . . . .                       | 1-2            |
| special function keys . . . . .         |                |
| as functions . . . . .                  | 6-3 — 6-4      |
| as programs . . . . .                   | 6-4            |
| as text . . . . .                       | 6-2            |
| entering . . . . .                      | 6-1            |
| exiting . . . . .                       | 6-1            |
| overlays . . . . .                      | 6-7            |
| split-precision data . . . . .          | 3-38           |
| SQR (square root) function . . . . .    | 2-15, 2-17     |

|                                |             |
|--------------------------------|-------------|
| STANDARD statement . . . . .   | 3-41        |
| STD (standard) key . . . . .   | 2-1 — 2-2   |
| STEP key . . . . .             | 4-10        |
| STOP . . . . .                 |             |
| command . . . . .              | 4-1, 4-3    |
| statement . . . . .            | 3-7         |
| STORE command . . . . .        | 5-8         |
| STORE DATA command . . . . .   | 5-18        |
| STORE KEY command . . . . .    | 5-21, 6-7   |
| string variables ROM . . . . . | 5-18, C-4   |
| summary, manual . . . . .      | ii          |
| symbols . . . . .              |             |
| @ . . . . .                    | 1-2         |
| ⌈ . . . . .                    | 1-2         |
| =, #, <, > . . . . .           | 2-19        |
| $\pi$ . . . . .                | 2-17        |
| ? . . . . .                    | 3-8         |
| syntaxes . . . . .             |             |
| BASIC programming . . . . .    | 3-44 — 3-46 |
| cassette . . . . .             | 5-4, 5-25   |

## T

|                                   |             |
|-----------------------------------|-------------|
| tabbed index by chapter . . . . . | iii         |
| table of contents . . . . .       | iv          |
| TAN (tangent) function . . . . .  | 2-17, 2-18  |
| tape (see cassette)               |             |
| terminal ROM . . . . .            | C-4         |
| TLIST command . . . . .           | 5-23        |
| TRACE key . . . . .               | 4-10        |
| trigonometric functions . . . . . | 2-17 — 2-18 |
| turn-on procedure . . . . .       |             |
| general . . . . .                 | 1-1         |
| initial calculator . . . . .      | A-3         |
| initial printer (9866A) . . . . . | A-5         |

## V

|                     |                         |
|---------------------|-------------------------|
| variables . . . . . |                         |
| array . . . . .     | 2-9 — 2-10, 3-36 — 3-37 |
| simple . . . . .    | 2-8                     |

## W

|                           |             |
|---------------------------|-------------|
| WAIT statement . . . . .  | 3-17        |
| WRITE command . . . . .   | 2-22        |
| WRITE statement . . . . . | 3-21, 3-28  |
| with FORMAT . . . . .     | 3-22 — 3-27 |

## ELECTRONIC SALES & SERVICE OFFICES

### UNITED STATES

**ALABAMA**  
P.O. Box 4207  
2003 Byrd Spring Road S.W.  
Huntsville 35802  
Tel: (205) 881-4591  
TWX: 810-726-2204

**ARIZONA**  
2336 E. Magnolia St.  
Phoenix 85034  
Tel: (602) 252-5061  
TWX: 910-951-1330

5737 East Broadway  
Tucson 85716  
Tel: (602) 298-2313  
TWX: 910-952-1162

**CALIFORNIA**  
1430 East Orangethorpe Ave.  
Fullerton 92631  
Tel: (714) 870-1000

3939 Lankershim Boulevard  
North Hollywood 91604  
Tel: (213) 877-1282  
TWX: 910-499-2170

1101 Embarcadero Road  
Palo Alto 94303  
Tel: (415) 327-6500  
TWX: 910-373-1280

2220 Watt Ave.  
Sacramento 95825  
Tel: (916) 482-1463  
TWX: 910-367-2092

9606 Aero Drive  
San Diego 92123  
Tel: (714) 279-3200  
TWX: 910-335-2000

**COLORADO**  
7965 East Prentice  
Englewood 80110  
Tel: (303) 771-3455  
TWX: 910-935-0705

**CONNECTICUT**  
12 Lunar Drive  
New Haven 06525  
Tel: (203) 389-6551  
TWX: 710-465-2029

**FLORIDA**  
P.O. Box 24210  
2806 W. Oakland Park Blvd.  
Ft. Lauderdale 33307  
Tel: (305) 731-2020  
TWX: 510-955-4099

P.O. Box 13910  
6177 Lake Eilenor Dr.  
Orlando, 32809  
Tel: (305) 859-2900  
TWX: 810-850-0113

**GEORGIA**  
P.O. Box 28234  
450 Interstate North  
Atlanta 30328  
Tel: (404) 436-6181  
TWX: 810-766-4890

**HAWAII**  
2875 So. King Street  
Honolulu 96814  
Tel: (808) 955-4455

**ILLINOIS**  
5500 Howard Street  
Skokie 60076  
Tel: (312) 677-0400  
TWX: 910-223-3613

**INDIANA**  
3839 Meadows Drive  
Indianapolis 46205  
Tel: (317) 546-4891  
TWX: 810-341-3263

**LOUISIANA**  
P.O. Box 856  
1942 Williams Boulevard  
Kenner 70062  
Tel: (504) 721-6201  
TWX: 810-955-5524

**MARYLAND**  
6707 Whitestone Road  
Baltimore 21207  
Tel: (301) 944-5400  
TWX: 710-862-9157

P.O. Box 1648  
2 Choke Cherry Road  
Rockville 20850  
Tel: (301) 948-6370  
TWX: 710-828-9684

**MASSACHUSETTS**  
32 Hartwell Ave.  
Lexington 02173  
Tel: (617) 861-8960  
TWX: 710-326-6904

**MICHIGAN**  
21840 West Nine Mile Road  
Southfield 48075  
Tel: (313) 353-9100  
TWX: 810-224-4882

**MINNESOTA**  
2459 University Avenue  
St. Paul 55114  
Tel: (612) 645-9461  
TWX: 910-563-3734

**MISSOURI**  
11131 Colorado Ave.  
Kansas City 64137  
Tel: (816) 763-8000  
TWX: 910-771-2087

148 Weldon Parkway  
Maryland Heights 63043  
Tel: (314) 567-1455  
TWX: 910-764-0830

**NEW JERSEY**  
W. 120 Century Road  
Paramus 07652  
Tel: (201) 265-5000  
TWX: 710-990-4951

1060 N. Kings Highway  
Cherry Hill 08034  
Tel: (609) 667-4000  
TWX: 710-892-4945

**NEW MEXICO**  
P.O. Box 8366  
Station C  
6501 Lomas Boulevard N.E.  
Albuquerque 87108  
Tel: (505) 265-3713  
TWX: 910-989-1665

156 Wyatt Drive  
Las Cruces 88001  
Tel: (505) 526-2485  
TWX: 910-983-0550

**NEW YORK**  
6 Automation Lane  
Computer Park  
Albany 12205  
Tel: (518) 458-1550  
TWX: 710-441-8270

1219 Campville Road  
Endicott 13760  
Tel: (607) 754-0050  
TWX: 510-252-0890

82 Washington Street  
Poughkeepsie 12601  
Tel: (914) 454-7330  
TWX: 510-248-0012

39 Saginaw Drive  
Rochester 14623  
Tel: (716) 473-9500  
TWX: 510-253-5981

5858 East Molloy Road  
Syracuse 13211  
Tel: (315) 454-2486  
TWX: 710-541-0482

1 Crossways Park West  
Woodbury 11797  
Tel: (516) 921-0300  
TWX: 510-223-0811

**NORTH CAROLINA**  
P.O. Box 5188  
1923 North Main Street  
High Point 27262  
Tel: (919) 885-8101  
TWX: 510-926-1516

**OHIO**  
25575 Center Ridge Road  
Cleveland 44145  
Tel: (216) 835-0300  
TWX: 810-427-9129

3460 South Dixie Drive  
Dayton 45439  
Tel: (513) 298-0351  
TWX: 810-459-1925

1120 Morse Road  
Columbus 43229  
Tel: (614) 846-1300

**OKLAHOMA**  
6301 N. Meridian Avenue  
Oklahoma City 73122  
Tel: (405) 721-0200  
TWX: 910-830-6862

**OREGON**  
Westhills Mall, Suite 158  
4475 S.W. Scholls Ferry Road  
Portland 97225

Tel: (503) 292-9171  
TWX: 910-464-6103

**PENNSYLVANIA**  
2500 Moss Side Boulevard  
Monroeville 15146  
Tel: (412) 271-0724  
TWX: 710-797-3650

1021 8th Avenue  
King of Prussia Industrial Park  
King of Prussia 19406  
Tel: (215) 265-7000  
TWX: 510-660-2670

**RHODE ISLAND**  
873 Waterman Ave.  
East Providence 02914  
Tel: (401) 434-5535  
TWX: 710-381-7573

**TENNESSEE**  
Memphis  
Tel: (901) 274-7472

**TEXAS**  
P.O. Box 1270  
201 E. Arapaho Rd.  
Richardson 75080  
Tel: (214) 231-6101  
TWX: 910-867-4723

P.O. Box 27409  
6300 Westpark Drive  
Suite 100  
Houston 77027  
Tel: (713) 781-6000  
TWX: 910-881-2645

231 Billy Mitchell Road  
Salt Lake City 84115  
Tel: (512) 434-4171  
TWX: 910-871-1170

**UTAH**  
2890 South Main Street  
San Antonio 78226  
Tel: (801) 487-0715  
TWX: 910-925-5681

**VERMONT**  
P.O. Box 2287  
Kennedy Drive  
South Burlington 05401  
Tel: (802) 558-4455  
TWX: 510-299-0025

**VIRGINIA**  
P.O. Box 6514  
2111 Spencer Road  
Richmond 23230  
Tel: (703) 285-3431  
TWX: 710-956-0157

**WASHINGTON**  
433-108th N.E.  
Bellevue 98004  
Tel: (206) 454-3971  
TWX: 910-443-2303

**\*WEST VIRGINIA**  
Charleston  
Tel: (304) 768-1232

**FOR U.S. AREAS NOT LISTED:**  
Contact the regional office nearest you: Atlanta, Georgia . . . North Hollywood, California . . . Paramus, New Jersey . . . Skokie, Illinois. Their complete addresses are listed above.

\*Service Only

### CANADA

**ALBERTA**  
Hewlett-Packard (Canada) Ltd.  
11748 Kingsway Ave.  
Edmonton  
Tel: (403) 452-3670  
TWX: 610-831-2431

**BRITISH COLUMBIA**  
Hewlett-Packard (Canada) Ltd.  
4519 Canada Way  
North Burnaby 2  
Tel: (604) 433-8213  
TWX: 610-922-5059

**MANITOBA**  
Hewlett-Packard (Canada) Ltd.  
513 Century St.  
Winnipeg  
Tel: (204) 786-7581  
TWX: 610-671-3531

**NOVA SCOTIA**  
Hewlett-Packard (Canada) Ltd.  
2745 Dutch Village Rd.  
Suite 206  
Halifax  
Tel: (902) 455-0511  
TWX: 610-271-4482

**ONTARIO**  
Hewlett-Packard (Canada) Ltd.  
1785 Woodward Dr.  
Brimley 3  
Tel: (613) 255-6180, 255-6530  
TWX: 610-562-1952

Hewlett-Packard (Canada) Ltd.  
50 Galaxy Blvd.  
Rexdale  
Tel: (416) 677-9611  
TWX: 610-492-4246

**QUEBEC**  
Hewlett-Packard (Canada) Ltd.  
275 Hymus Boulevard  
Pointe Claire  
Tel: (514) 697-4232  
TWX: 610-422-3022  
Telex: 01-20607

**FOR CANADIAN AREAS NOT LISTED:**  
Contact Hewlett-Packard (Canada) Ltd. in Pointe Claire, at the complete address listed above.

### CENTRAL AND SOUTH AMERICA

**ARGENTINA**  
Hewlett-Packard Argentina  
S.A.C.e.I.  
Lavalle 1171 - 3°  
Buenos Aires  
Tel: 35-0436, 35-0627, 35-0431  
Telex: 012-1009  
Cable: HEWPACK ARG

**BRAZIL**  
Hewlett-Packard Do Brasil  
I.E.C. Ltda.  
Rua Frei Caneca 1119  
Sao Paulo - 3, SP  
Tel: 288-7111, 287-5858  
Cable: HEWPACK Sao Paulo  
Hewlett-Packard Do Brasil  
Praça Dom Feliciano 78  
Salas 806/808  
Porto Alegre  
Rio Grande do Sul (RS)-Brasil  
Tel: 25-8470  
Cable: HEWPACK Porto Alegre

Hewlett-Packard Do Brasil  
I.E.C. Ltda.  
Rua da Matriz 29  
Botafogo ZC-02  
Rio de Janeiro, GB  
Tel: 246-4417, 246-2919  
Cable: HEWPACK Rio de Janeiro

**CHILE**  
Héctor Calcagni y Cia, Ltda.  
Casilla 16.475  
Santiago  
Tel: 423 96  
Cable: CALCAGNI Santiago

**COLOMBIA**  
Instrumentacion  
Henrik A. Langebaek & Kier S.A.  
Carrera 7 No. 48-59  
Apartado Aereo 6287  
Bogota, 1 D.E.  
Tel: 45-78-06, 45-55-46  
Cable: AARIS Bogota  
Telex: 44400INSTCO

**COSTA RICA**  
Lic. Alfredo Gallegos Gurdian  
Apartado 10159  
San José  
Tel: 21-86-13  
Cable: GALGUR San José

**ECUADOR**  
Laboratorios de Radio-Ingenieria  
Calle Guayaquil 1246  
Post Office Box 3199  
Quito  
Tel: 212-496; 219-185  
Cable: HORVATH Quito

**EL SALVADOR**  
Electronic Associates  
Apartado Postal 1682  
Centro Comercial Gigante  
San Salvador, El Salvador C.A.  
Paseo Escalon 4649-4° Piso  
Tel: 23-44-60, 23-32-37  
Cable: ELECAS

**GUATEMALA**  
IPESA  
5a via 2-01, Zona 4  
Guatemala City  
Tel: 63-6-27 & 64-7-86  
Telex: 4176 Mahohegu

**MEXICO**  
Hewlett-Packard Mexicana, S.A.  
de C.V.  
622 Adolfo Prieto  
Col. del Valle  
Mexico 12, O.F.  
Tel: 643-4232; 523-1874  
Telex: 017-74-507

**NICARAGUA**  
Roberto Terán G.  
Apartado Postal 689  
Edificio Terán  
Managua  
Tel: 3451, 3452  
Cable: ROTERAN Managua

**PANAMA**  
Electrónico Balboa, S.A.  
P.O. Box 4929  
Ave. Manuel Espinosa No. 13-50  
Bldg. Alina  
Panama City  
Tel: 230833  
Telex: 3481003, Curundu,  
Canal Zone  
Cable: ELECTRON Panama City

**PARAGUAY**  
Z.T. Melamed S.R.L.  
Division. Aparatos y Equipos  
Medicos  
Salon de Exposicion y Escritorio:  
Chile 482  
Edificio Victoria—Pianta Baja  
Asuncion, Paraguay  
Tel: 4-5069, 4-6272  
Cable: RAMEL

**PERU**  
Compañia Electro Medica S.A.  
Ave. Enrique Canauel 312  
San Isidro  
Casilla 1030  
Lima  
Tel: 22-3900  
Cable: ELMED Lima

**PUERTO RICO**  
San Juan Electronics, Inc.  
P.O. Box 5167  
Ponce de Leon 154  
Pda. 3-PTA de Tierra  
San Juan 00906  
Tel: (809) 725-3342, 722-3342  
Cable: SATRONICS San Juan  
Telex: SATRON 3450 332

**URUGUAY**  
Pablo Ferraro S.A.  
Comercial e Industrial  
Avenida Italia 2877  
Casilla de Correo 370  
Montevideo  
Tel: 40-3102  
Cable: RADIUM Montevideo

**VENEZUELA**  
Hewlett-Packard De Venezuela  
C.A.  
Apartado 50933  
Caracas  
Tel: 71.88.05, 71.88.69, 71.99.30  
Cable: HEWPACK Caracas  
Telex: 21146 HEWPACK

**FOR AREAS NOT LISTED,**

**CONTACT:**  
Hewlett-Packard  
INTERCONTINENTAL  
3200 Hillview Ave.  
Palo Alto, California 94304  
Tel: (415) 493-1501  
TWX: 910-373-1267  
Cable: HEWPACK Palo Alto  
Telex: 034-8300, 034-8493



PART NO. 09830-90001  
MICROFICHE NO. 09830-99001

PRINTED IN U.S.A.  
JAN 1973